







**MONOPRICE PID**

**10046**

**PRODUCT NAME**

**Slim Cat5E Punch Down Keystone Jack - WHITE**

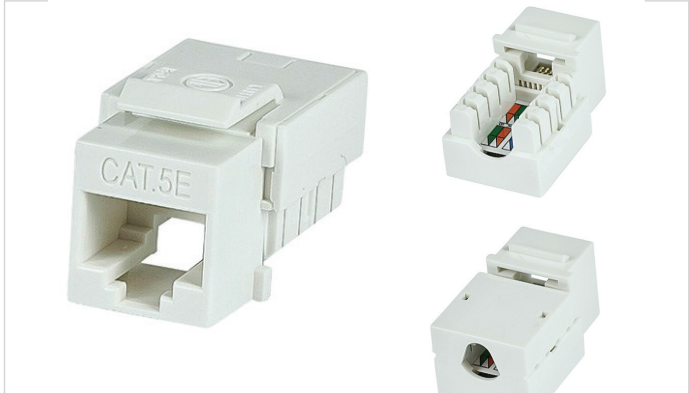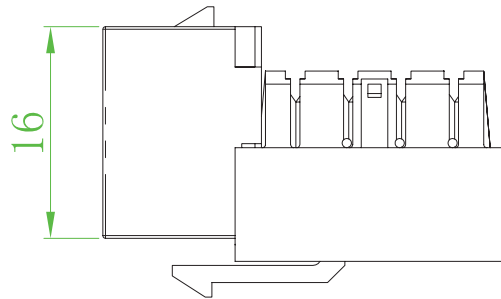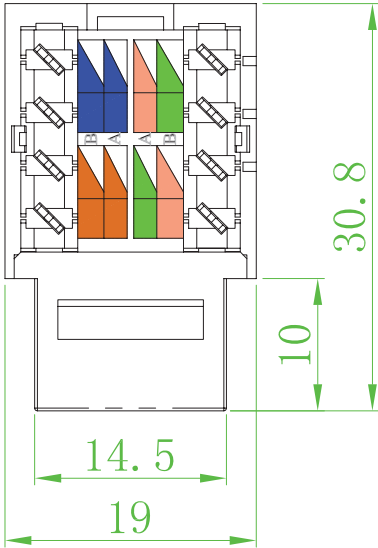


**ELECTRICAL**

1. Current Rating: 1.5 Amps
2. Insulation Resistance: 500 MOhm
3. Contact Resistance: 20 mOhm
4. DC Resistance: 0.1 Ohm
5. Dielectric Strength Voltage: 1000V


**PRODUCT SPECIFICATIONS**

1. Housing Material: Self-Extinguished plastic UL 94V-0  
Insert Material: PC UL 94V-0 rated  
Contact Finished: 50 micro-inch Gold over, Nickel 40 micro-inch
2. IDC Housing: Self-Extinguished plastic UL 94V-0  
IDC Terminal: Phosphor Bronze, Nickel plated 50-60 micro-inch
3. P.C.Board: FR4, 1.6mm Double side
4. Operation Temperature: +14°F to +140°F (-10°C to 60°C)
5. Insertion Force: 31.7 oz. (900gms) for 8 contacts
6. Retention Strength: 17.0 lbs. (7.7 kgs) between jack and plug
7. Durability: 750 cycles contact resistance test check every 100 cycles.  
Insertion cycles at 20 cycles/minute max.
8. Certifications: 3P, FCC, ANSI/TIA-568-C.2, UL, CUL, E357861

**PIN/PAIR ASSIGNMENTS**

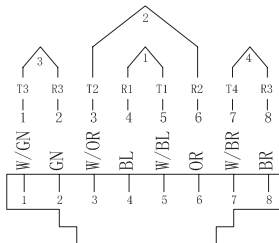

**T568A**

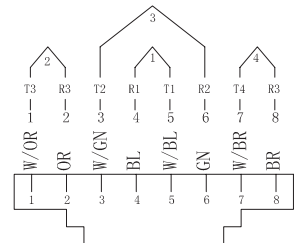

**T568B**

**UL**

**CUL**

**ETL**

**CE**

**FCC**

**RoHS**