



Rev.	Rev. Date	Brief Description
V1	20220816	update to ANSI/TIA 568.2-D
V2	20220818	Add other printing
V3	20220824	update conductor

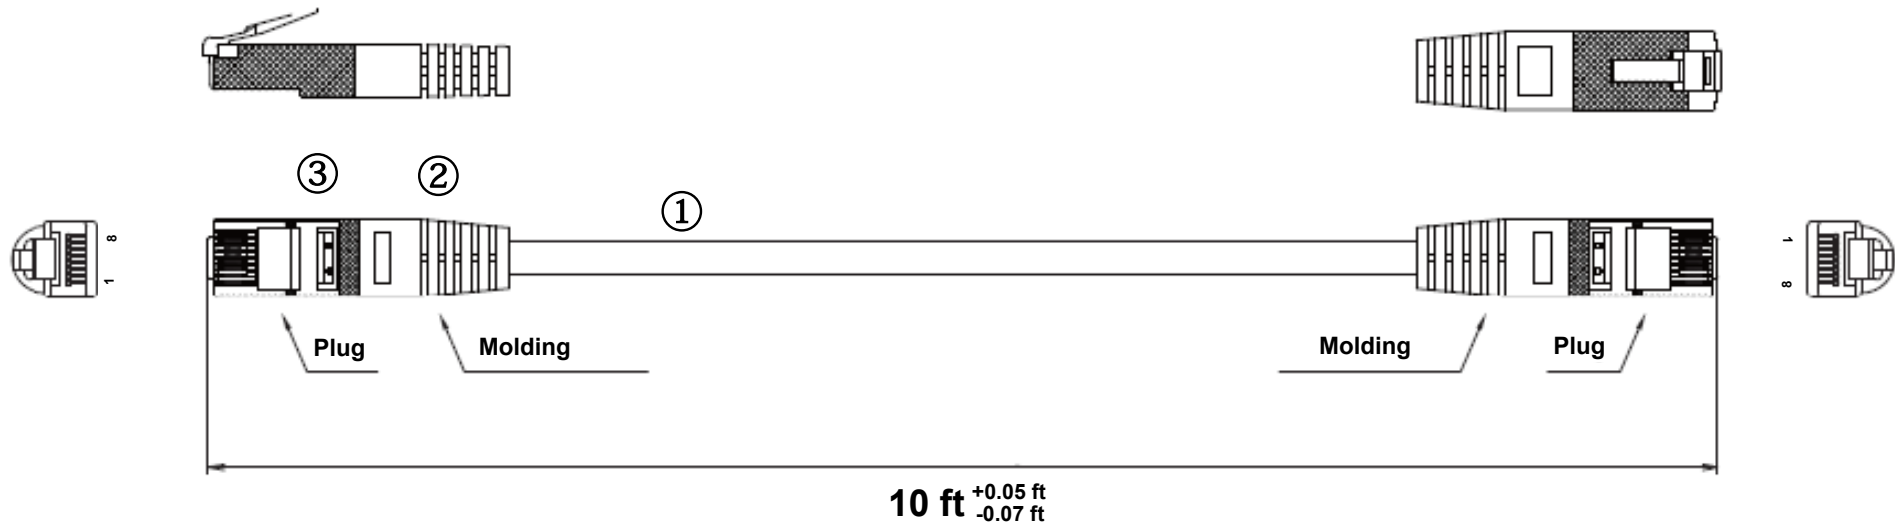

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P1(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

NOTE:
1. ELETRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.
<2> FLUKE CHANNEL LEVEL 1DB↑
<3> CONDUCTOR RESISTANCE: L ≤ 1CM 10ΩMAX
 10<L ≤20M 15ΩMAX
 20<L ≤40M 25ΩMAX

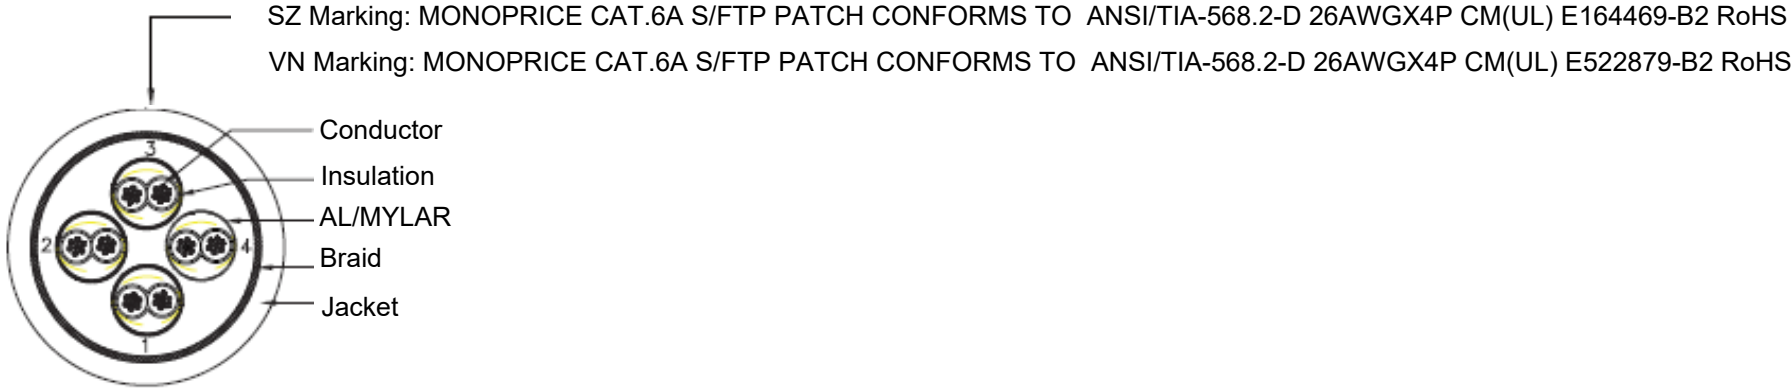

Conductor	26 AWG (7/0.16±0.15mmBC)*4P
INSULATION	Diameter = 1.04± 0.05mm
Jacket PVC	Thickness: Max AVG:0.50 Diameter = 5.8±0.15mm

③	RJ45 PLUG	8P8C 50U" GOLD PLATED TWO-PIECE PLUG.NICKEL-PLATED SHELL		
②	MOLDED	PVC MOLDED BOOT		
①	CABLE	CAT6A STP [1P/26AWG(7/0.16±0.015mmBC)+AL/MY]*4+BRAID(16*5\0.1AL-MG) OD=Ø5.8±0.15M,PVC JACKET		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION

Monoprice Cat6A 10ft Blue Patch Cable, Double Shielded (S/FTP), 26AWG, 10G, Pure Bare Copper, Molded RJ45, Entegrade Series Ethernet Cable

PID **11245**

DATE
2022/08/24

UNIT
Feet

FILE NAME
11245_PRODUCT