


Rev.	Rev. Date	Modified By	Brief Discription
V1	2022/12/30	Alan Dai	New

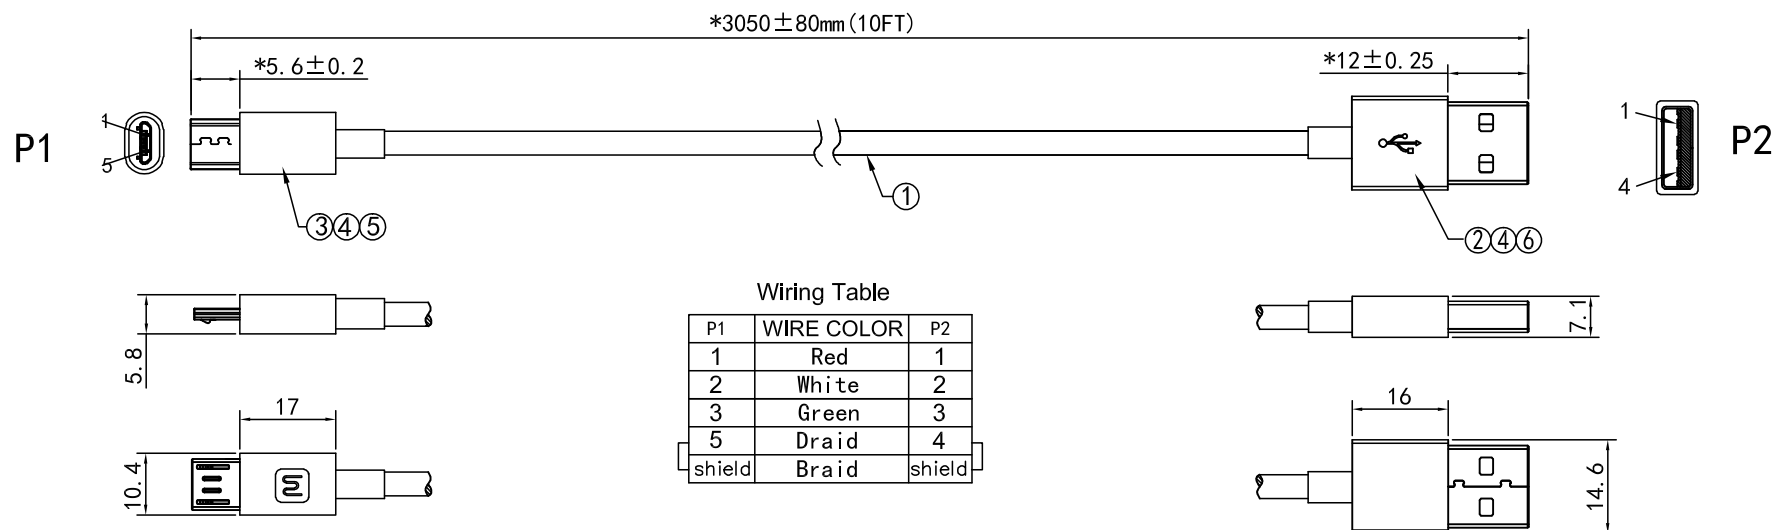

1. Electrical test:

100% conduction test, short circuit, open circuit and dislocation

On resistance: $\leq 3\Omega$ Insulation resistance: DC300V, $\geq 10M\Omega$ 2. USB A(M) Insertion force: $\leq 35N$ USB A(M) Pull out force: $\geq 10N$ 3. Micro B(M) Insertion force: $\leq 30N$ Micro B(M) Pull out force: $\geq 8N$ 4. Bending test: 200g, $\pm 60^\circ$, 30times/min, 2000 times no abnormality

⑥	Plastic shell	Micro USB Black ABS shell,RoHS.	1	PCS
⑤	Plastic shell	USB AM Black ABS shell,RoHS.	1	PCS
④	Mold	45P Black PVC mold, RoHS	7.8	G
③	Connector	Micro USB Connector,Nicel Plated,RoHS	1	PCS
②	Connector	USB AM Connector,Nicel Plated,RoHS	1	PCS
①	Cable	$\varnothing 3.3[28\#(7*0.12TS)*2C+20\#(60*0.10TS)*1C+D+AL+B]$,Black PVC, RoHS	1	PCS
NO	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

 **MONOPRICE**

VENDOR CODE:	V16988	DESCRIPTION:	Select Series USB A to Micro B Charge & Sync Cable, 10ft Black
APPROVED BY PM & DATE:		PID#:	13932
PM PRINT NAME:		DATE:	2022/12/30
		UNIT:	MM
		SHEET:	1 OF 2
		FILE NAME:	PID_PRODUCT