



Rev.	Rev. Date	Brief Description

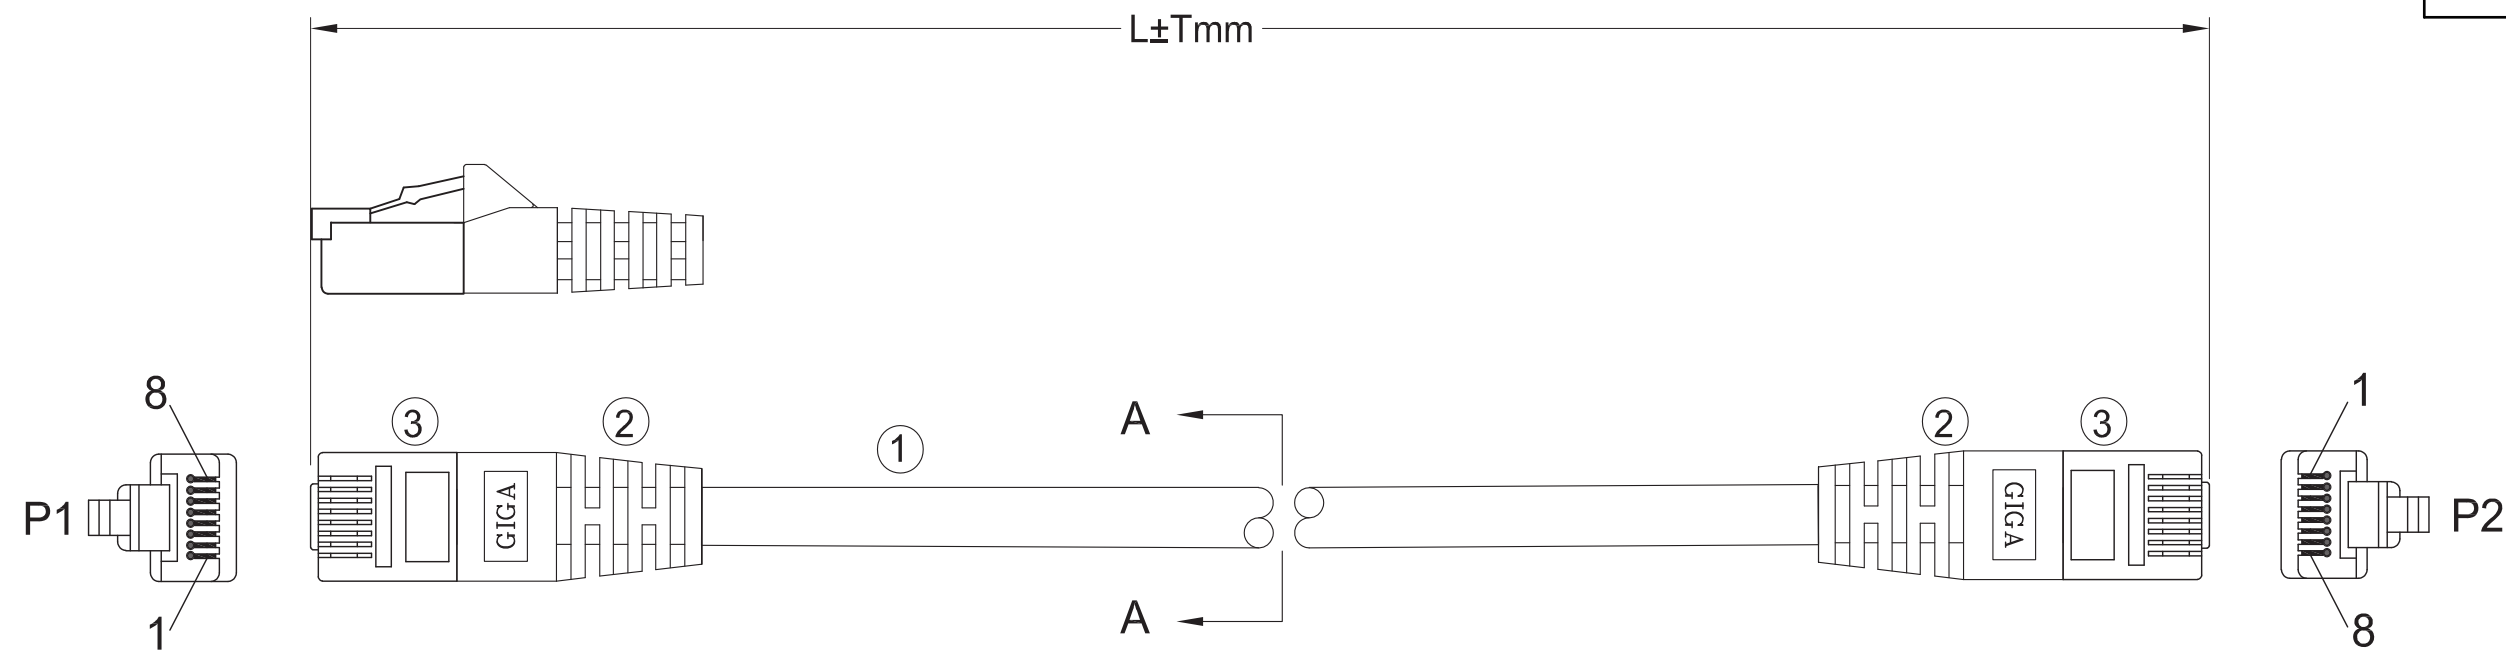

SZ Marking: CAT.6 U/UTP CROSSOVER PATCH ETL CONFORMS ANSI/TIA-568.2-D ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 ▲ 24AWGX4P CM(UL) E164469-B2 ▲ RoHS COMPLIANCE
VN Marking: CAT.6 U/UTP CROSSOVER PATCH ETL CONFORMS ANSI/TIA-568.2-D ISO/IEC 11801 ED.2 & EN 50288-6-2 & IEC 60332-1-2 ▲ 24AWGX4P CM(UL) E522879 ▲ RoHS COMPLIANCE

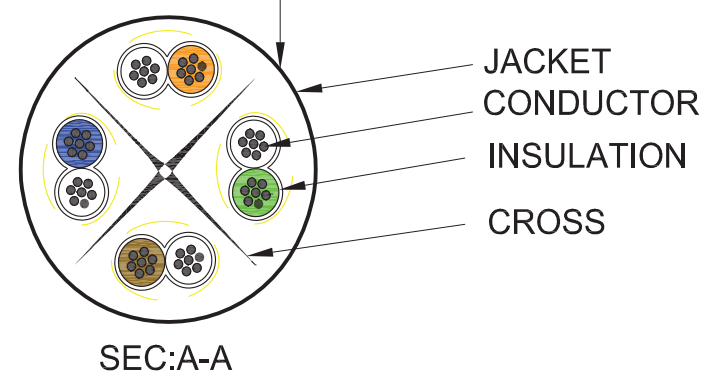

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.
<2> FLUKE CHANNEL LEVEL 1DB↑
<3> CONDUCTOR RESISTANCE: L≤10M 10ΩMAX
10<L≤20M 15ΩMAX
20<L≤40M 25ΩMAX

Conductor		Bare Copper 24WG (7/0.196±0.015mmBC)*4P
INSULATION		Thickness:MIN at any point:0.2mm MAX AVG:0.3mm Diameter:1.03±0.06mm
Jacket	PVC	Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:6.0±0.3mm

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

3	RJ45 PLU	RJ45 PLUG: 8P8C 50U" GOLD PLATED TRANSPARENT PLUG;		
2	MOLDED	PVC MOLDED BOOT		
1	CABLE	CAT6A U/UTP[24AWG(7/0.19BC±0.015)]*4 OD:Ø6.0±0.3MM PVC JACKET		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

PID	Length(FT)	Color
2375	3ft.(36")	Gray
2376	3ft.(36")	Red
2379	7ft.(84")	Red
2380	7ft.(84")	Orange
2383	14ft.(168")	Red
2385	25ft.(300")	Red
2388	50ft.(600")	Orange

	PINOUT		
PA/R	P1(T568B)	WIRE	P2(T568A)
2	1	WHT/ORG	3
	2	ORG	6
3	3	WHT/GRN	2
	6	GRN	4
1	4	BLU	5
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8



DESCRIPTION :
Monoprice™ Cat6 Ethernet Patch Cable - Snagless RJ45, Stranded, 550MHz, UTP, Pure Bare Copper Wire, Crossover, 24AWG, 50ft, Orange

PID #:	2375, 2376, 2379, 2380, 2383, 2385, 2388
--------	--

DATE :	UNIT : FT / IN / MM	FILE NAME:
--------	---------------------	------------