


REVISION INFORMATION		
Rev.	Rev. Date	Brief Description
V1	2023.03.28	Initial Issue
V2	2024.03.04	connectors printing revised.

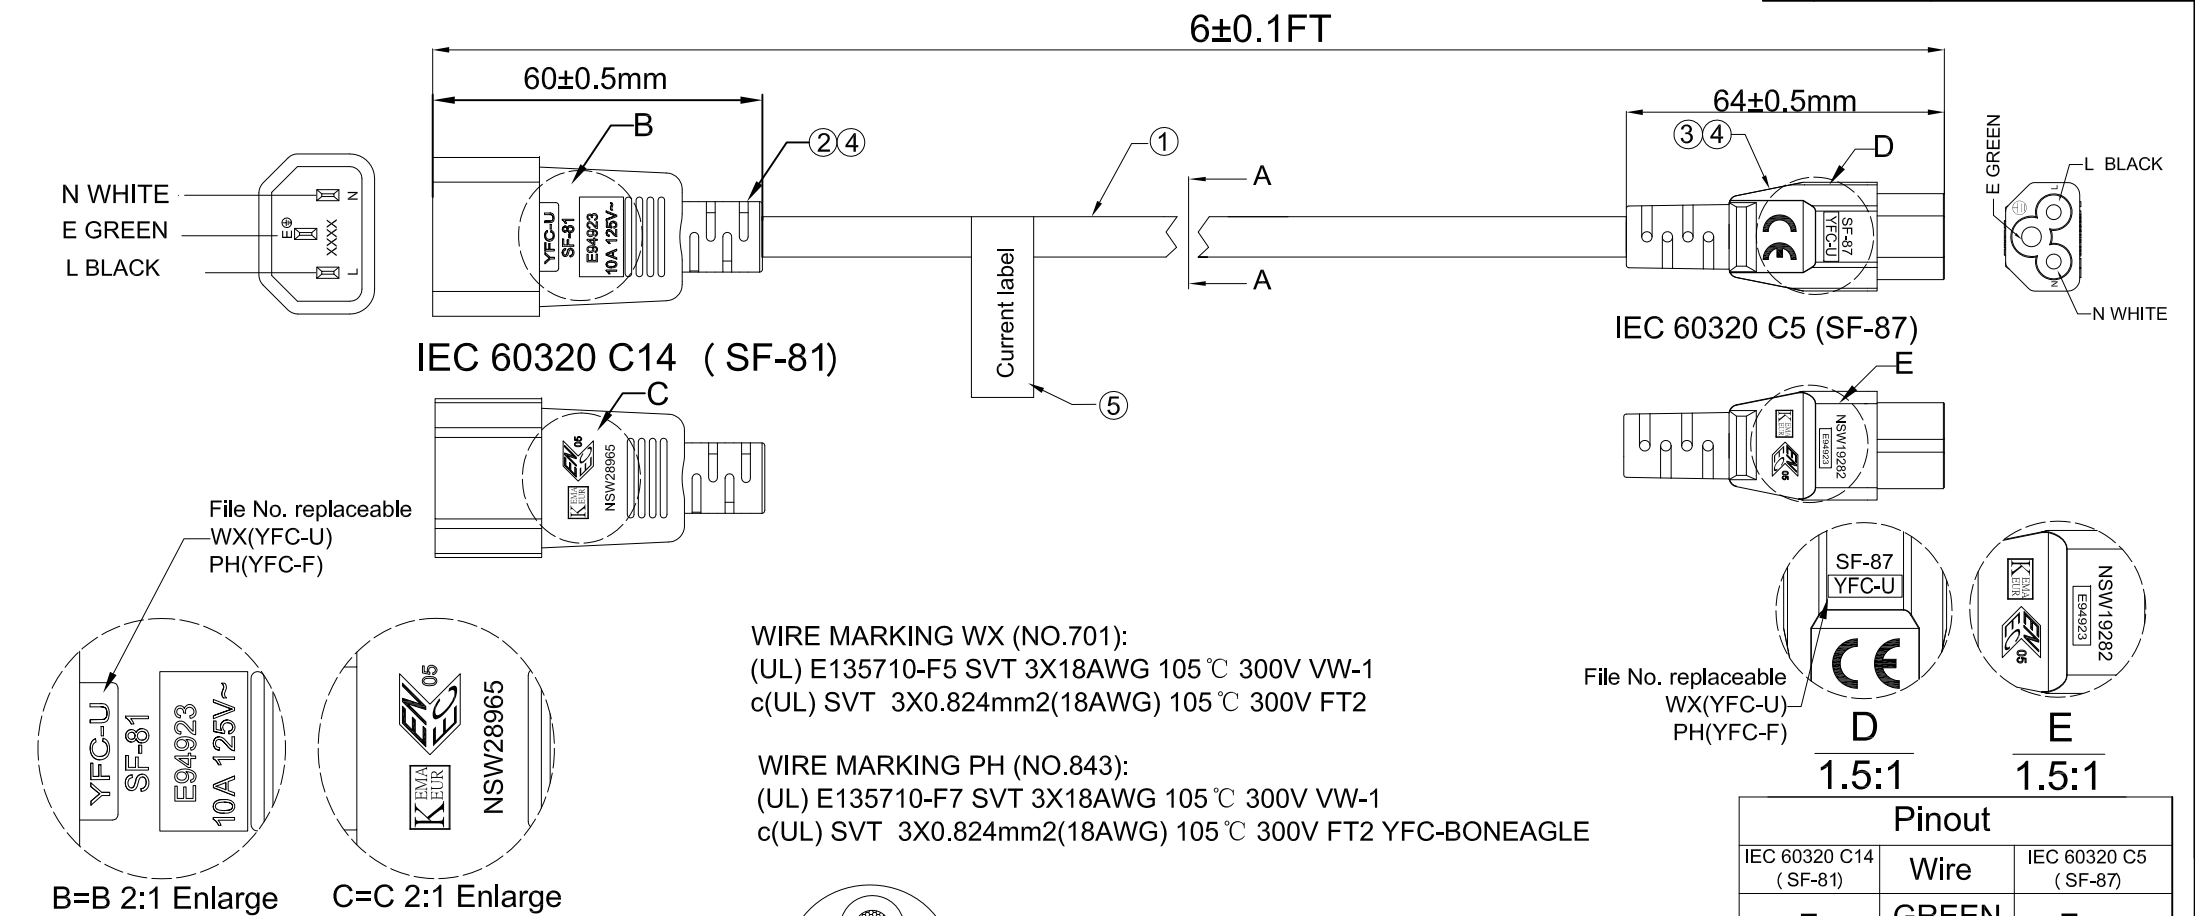

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :1500V /1 Sec	
Electrical Performance (20℃)	
Item	Parameter
Conductor resistance	≤ 22.84Ω/1000m
Voltage Rating	AC 300V

⑤	Current label	Indoor Use Label 7A 125V~	1	PC
④	Molding	PVC 40P	AR	G
③	Terminal	C5Terminal Brass Natural color With 18-14AWG Black PBT UL94-V0	1	PC
②	Terminal	C14Terminal Brass Natural color and Black Bracket, With 18-14AWG.	1	PC
①	Cable	SVT 18AWGx3C 105℃	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

M MONOPRICE

DESCRIPTION:		
Monoprice Power Cord - IEC 60320 C14 to IEC 60320 C5, 18AWG, 7A/125V, 3-Prong, Black, 6ft		
PID: 27317		
DATE : 2024.03.04	UNIT : MM	FILE NAME: PID_PRODUCT