



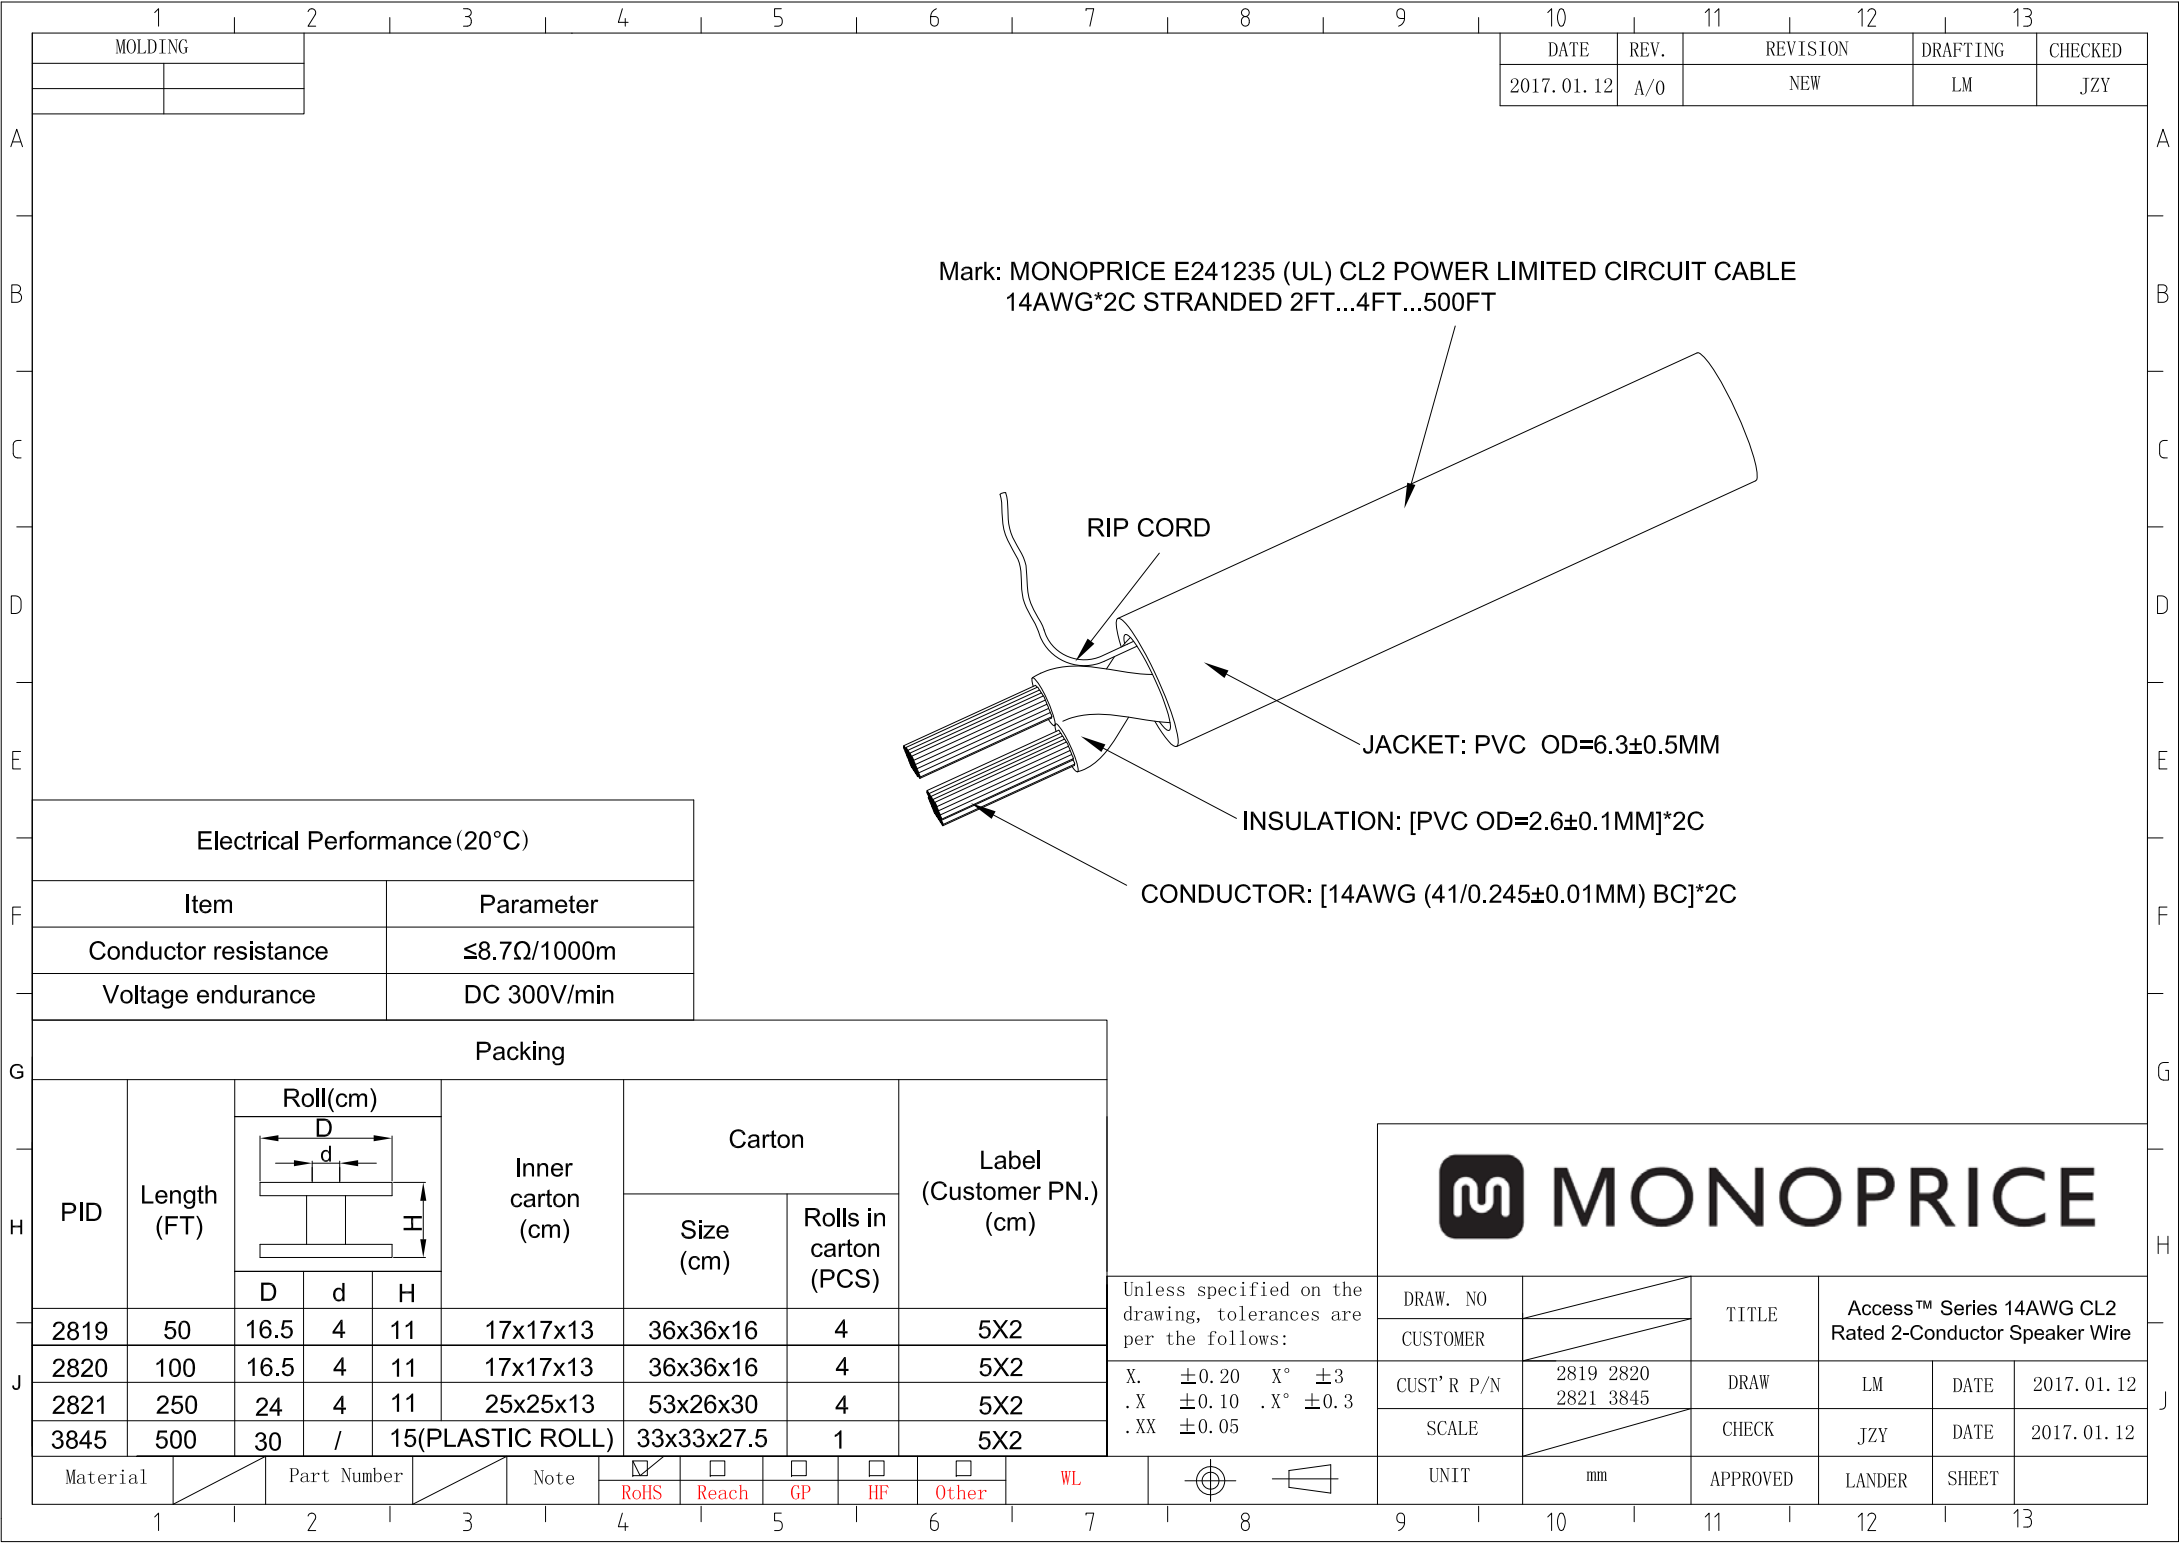


Mark: MONOPRICE E241235 (UL) CL2 POWER LIMITED CIRCUIT CABLE
14AWG*2C STRANDED 2FT...4FT...500FT

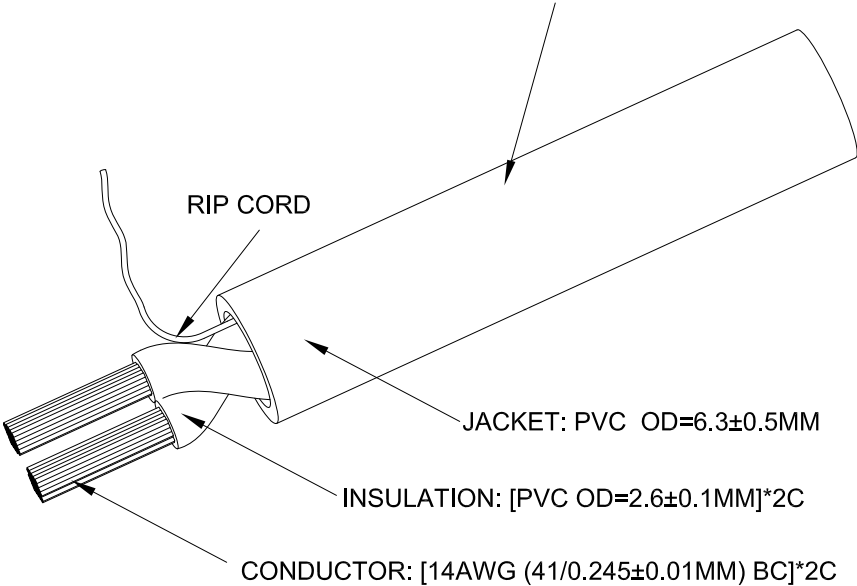

Electrical Performance (20°C)

Item	Parameter
Conductor resistance	≤8.7Ω/1000m
Voltage endurance	DC 300V/min

Packing

Packing								
PID	Length (FT)	Roll(cm)			Inner carton (cm)	Carton		Label (Customer PN.) (cm)
						Size (cm)	Rolls in carton (PCS)	
		D	d	H				
2819	50	16.5	4	11	17x17x13	36x36x16	4	5X2
2820	100	16.5	4	11	17x17x13	36x36x16	4	5X2
2821	250	24	4	11	25x25x13	53x26x30	4	5X2
3845	500	30	/	15(PLASTIC ROLL)	33x33x27.5		1	5X2



Unless specified on the drawing, tolerances are per the follows:

X.	±0.20	X°	±3
.X	±0.10	.X°	±0.3
.XX	±0.05		

DRAW. NO	TITLE		Access™ Series 14AWG CL2 Rated 2-Conductor Speaker Wire			
CUSTOMER						
CUST' R P/N	2819 2820 2821 3845	DRAW	LM	DATE	2017. 01. 12	
SCALE			CHECK	JZY	DATE	2017. 01. 12
UNIT	mm	APPROVED	LANDER	SHEET		

Material		Part Number		Note	☒ RoHS	☐ Reach	☐ GP	☐ HF	☐ Other	WL		
----------	--	-------------	--	------	--	--------------------------------	-----------------------------	-----------------------------	--------------------------------	----	--	--