


RoHS COMPLIANT

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description

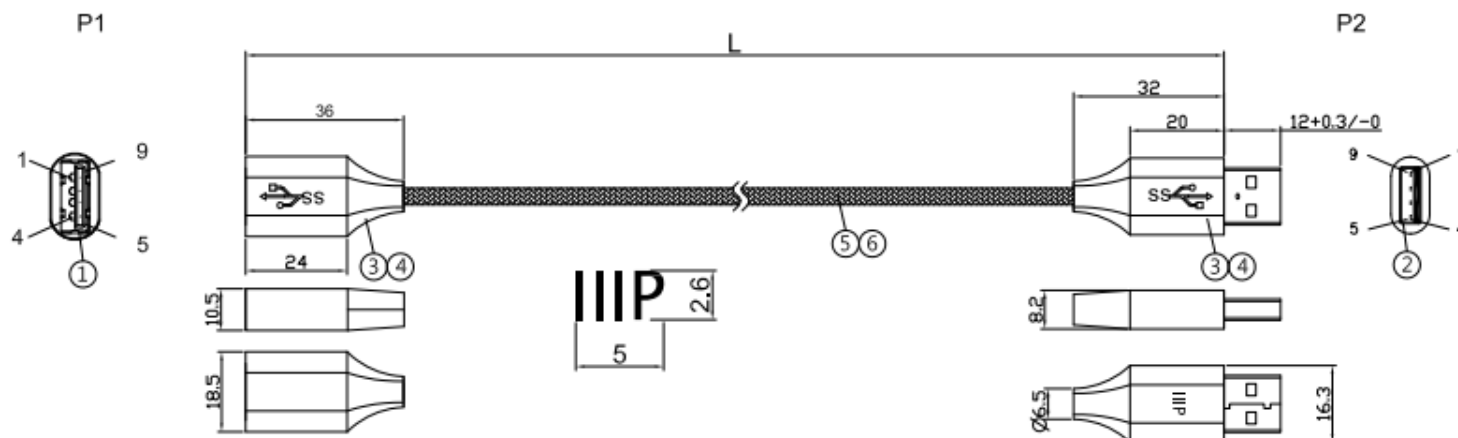

USB 3.0(A)/F MOLDING TYPE

USB 3.0A/M MOLDING TYPE

PIN OUT

P1		P2
1	RED	1
3	GREEN	3
2	WHITE	2
4	BLACK	4
5	YELLOW	5
6	BLUE	6
7	DRAIN	7
8	ORANGE	8
9	PURPLE	9
SHELL	BRAID	SHELL

CABLE ELECTRICAL TEST:

- <1>.100% OPEN SHORT & MISS WIRE TEST.
 <2>.INSULATION RESISTANCE: DC300V 10Mohm MIN
 <3>.CONDUCTOR RESISTANCE:5 ohm MAX.

Part No.	L/MM.	±T/MM.
30714	915	30
30715	1830	50
30716	3050	50

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
⑥	CABLE	UL20276 [(30AWGx1P+AL+D+M)x2C+30AWG*1P+24AWG*2C+AL+D+B WHITE JACKET OD:4.2	1	
⑤	NYLON NET	BLACK COTTON THREAD WEAVING NET	1	
④	OUTER MOLD	45P PVC BLACK IN COLOR	2	
③	INSIDE MOLD	PE NATURAL	2	
②	CONNECTOR	USB 3.0 A/M GOLD PLATED INSULATOR BLACK BLUE	1	
①	CONNECTOR	USB 3.0 A/F GOLD PLATED INSULATOR BLACK BLUE	1	



MONOPRICE

VENDOR CODE:

16442

DESCRIPTION:

USB 3.0 A/F-USB 3.0 A/M

APPROVED BY & DATE:

ITEM NO.:

PID .130714&130715&130716

PM PRINT NAME:

DATE:
2017/01/10REV:
A01UNIT:
MMSHEET:
1 OF 2SCALE:
1:1