



VERSION INFORMATION (Vender)			
Rev.	Rev. Date	Modified By	Brief Description
V1			Initial Issue
V2			

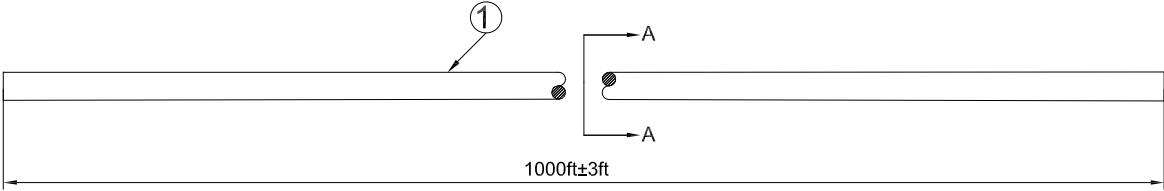

MARING:(UL).E164469-B2 22AWGX4P CAT8 SSTP RoHS COMPLIANCE 1000FT

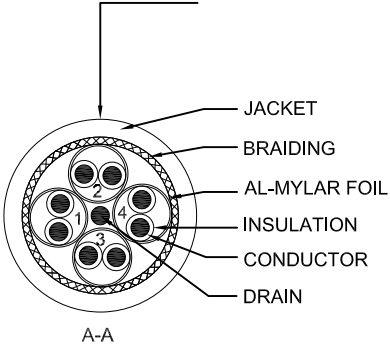

1.Physical Characteristic

- ◆Temperature Rating: 75℃
- ◆Voltage rating: 300V AC
- ◆Elongation at conductors: ≥10%
- ◆Elongation at insulation: ≥300%
- ◆Tensile strength of insulation: ≥16.5MPa
- ◆Elongation at jacket: ≥100%
- ◆Tensile strength of jacket: ≥10.3MPa

2.Electrical Characteristics

- ◆Conductor DC resistance: 73.2Ω/KM @ 20℃
- ◆DC Resistance Unbalance: ≤5%
- ◆Insulation resistance: ≥500MΩ/100m
- ◆Dielectric Test: 500V DC/1min; No Breakdown

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

Conductor		22AWG (1/0.62±0.008mmBC)*4P
INSULATION		Diameter=1.55±0.05mm
Jacket	PVC	Thickness: Max AVG:0.60 Diameter=8.0±0.20mm

①	CABLE	CAT8 SSTP 4P[22AWG(1/0.62±0.008MM BC)+AL/MY]+BRAID(AL-MG16*8/0.12) OD=8.0±0.20mm PVC JACKET		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

VENDOR CODE :		DESCRIPTION :	
V16876		SSTP Cat8 22AWG Solid bulk cable	
APPROVED BY PM & DATE :		PID # :	
		39075	
PM PRINT NAME :		DATE :	UNIT :
		2020/03/26	MM
		SHEET:	FILE NAME:
		1 OF 2	PID_PRODUCT