



P/N **3354**
User Manual



Monoprice™ Universal Cable Jacket Stripper

CUSTOMER SERVICE

The Monoprice Customer Service department is dedicated to ensuring that your ordering, purchasing, and delivery experience is second to none. If you have any problems with your order, please give us an opportunity to make it right. You can contact a Monoprice Customer Service representative through the Live Chat link on our website **www.monoprice.com** or via email at **support@monoprice.com**. Check the website for support times and links.

TECHNICAL SUPPORT

Monoprice™ is pleased to provide free, live, online technical support to assist you with any questions you may have about installation, setup, troubleshooting, or product recommendations. If you ever need assistance with your new product, please come online to talk to one of our friendly and knowledgeable Tech Support Associates. Technical support is available through the online chat button on our website **www.monoprice.com** or through email by sending a message to **tech@monoprice.com**. Check the website for support times and links.

Monoprice™ and all Monoprice logos are trademarks of Monoprice Inc.

Need Help? We're here for you!

Contact us: **www.monoprice.com/contactus**

Product pictures are for reference only.

Specifications described herein are subject to change without prior notification.

Monoprice™ and all Monoprice logos are trademarks of Monoprice Inc.

Copyright © 2023 Monoprice, Inc. All rights reserved.


Monoprice, Inc.

1 Pointe Drive, Suite 400

Brea, CA 92821 – USA

www.monoprice.com

For Use on Coaxial Cable RG59, RG6, RG7/RG11, Round Networking Cable, and Flat Telephone Cable.

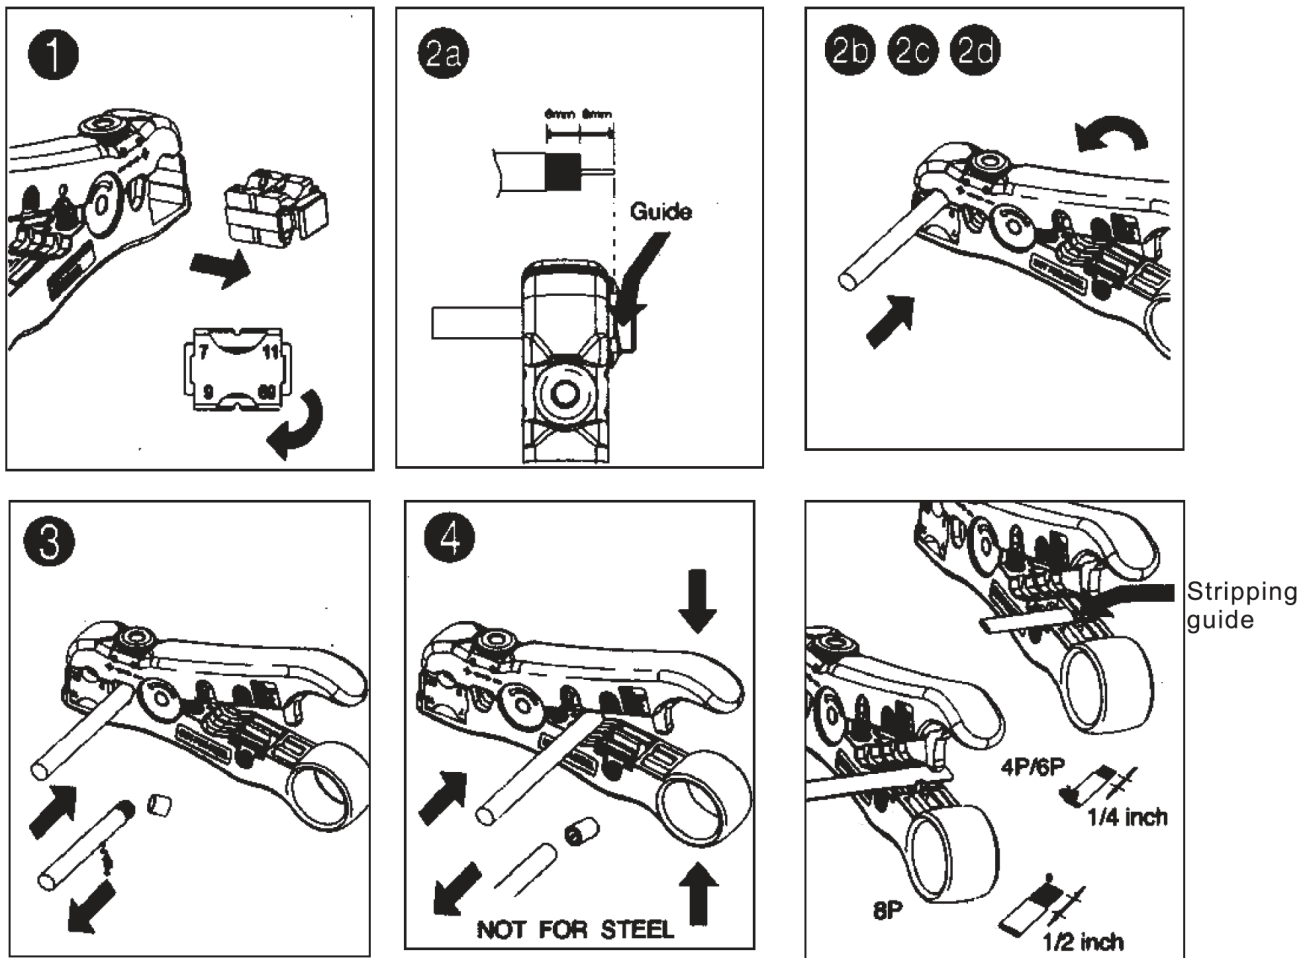

Instructions

1. The cassette is reversible; one side is available for RG 59/6 and the opposite side is for RG 7/11.
2. For stripping coaxial cable:
 - a. Insert the cable until it aligns with the cable guide.
 - b. Insert your index finger into the stripper's finger ring. Rotate the stripper counter-clockwise 3-5 times. The cable insulation is cut while you are turning the stripper.
 - c. Open the jaws and remove the cable. Pull away the outer jacket and dielectric to expose the inner conductor.
 - d. Stripping distance is designed for 6mm, for each dielectric and inner conductor.
3. For stripping round networking cable:
 - a. Insert the cable into the second stripping hole, rotate 1-3 times counter-clockwise, then open the jaw and remove the outer jacket.
 - b. The black color adjusting knob is for adjusting the blade's depth. Turn clockwise for increasing the blade's depth and counter-clockwise for reducing the depth.
4. For cutting coaxial cable, round networking cable, or flat telephone cable:
 - a. Place the cable in position and then squeeze the handles.
5. For stripping flat cable:
 - a. Insert the cable between the stripper blades.
 - b. Squeeze the handles, cable must be kept perpendicular and then pull from the tool.
 - c. Insert 8P cable into the two-bladed side of the tool's stripper and let it extend a little past the lower cut blade.