




Rev.	Rev. Date	Modified By	Brief Description
V1	2020.04.29	TW	Initial Issue

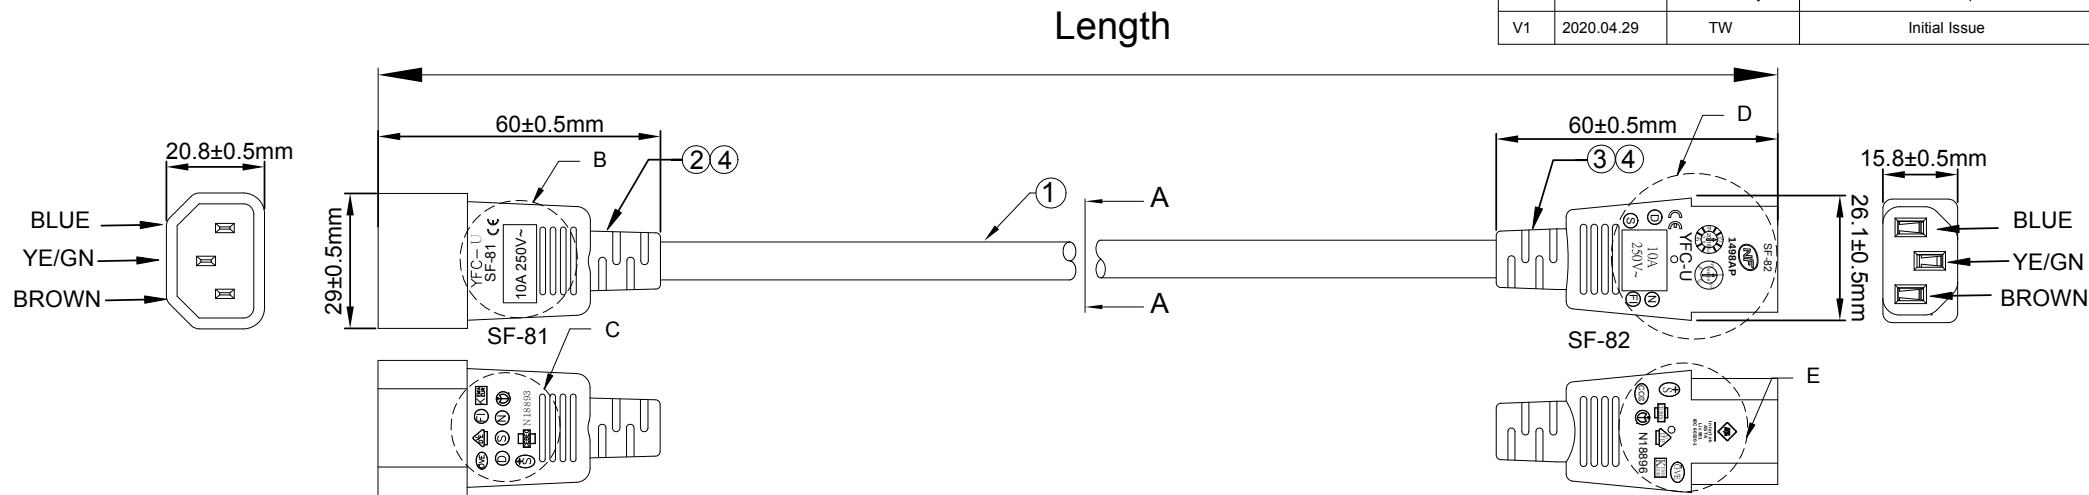


CABLE MARKING (NO.129) :
+++++ KEMA-KEUR △CEBEC 972 ◁VDE▷ NF-USE 1345
IEMMEQU HO5VV-F 3G 0.75MM² V-75 300/500V ORDINARY DUTY NSW17436 YFC BON-EAGLE




B=B 2:1 Enlarge




C=C 2:1 Enlarge



A=A 2:1 Section



D=D 2:1 Enlarge



E=E 2:1 Enlarge

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :2000V /1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor resistance	≤ 26Ω/1000m
Voltage Rating	AC 300V/500V

④	Molding	Black PVC 40P	AR	G
③	Terminal	C13Terminal Brass Natural color and Bracket, Black	1	PC
②	Terminal	C14 terminal Black	1	SET
①	Cable	H05VV-F 3G 0.75MM ² x3C Black	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

PID	Color	Length
41686	Black	0.5M±0.01
41687	Black	1M±0.02
41688	Black	3M±0.03
41689	Black	5M±0.04

Pinout		
SF-81	Wire	SF-82
E	YE/GR	E
N	Blue	N
L	Brown	L



VENDOR CODE : V10277		DESCRIPTION : H05VV-F 3G 0.75MM ² x3C Black SF-81 TO SF-82	
APPROVED BY PM & DATE :		PID # : 41686. 41687. 41688. 41689	
PM PRINT NAME :		DATE : 2020.04.29	UNIT : MM
		SHEET: 1 OF 2	FILE NAME: PID_PRODUCT