


ACCORDING TO : ANSI/TIA-568.2-D
 ISO/IEC 11801-1
 IEC 60603-7
 IEEE 802.3bt Power over Ethernet Plus Plus(4PPoE) application
 IEC 60512-99-002 Mating and un-mating connectors under electrical load

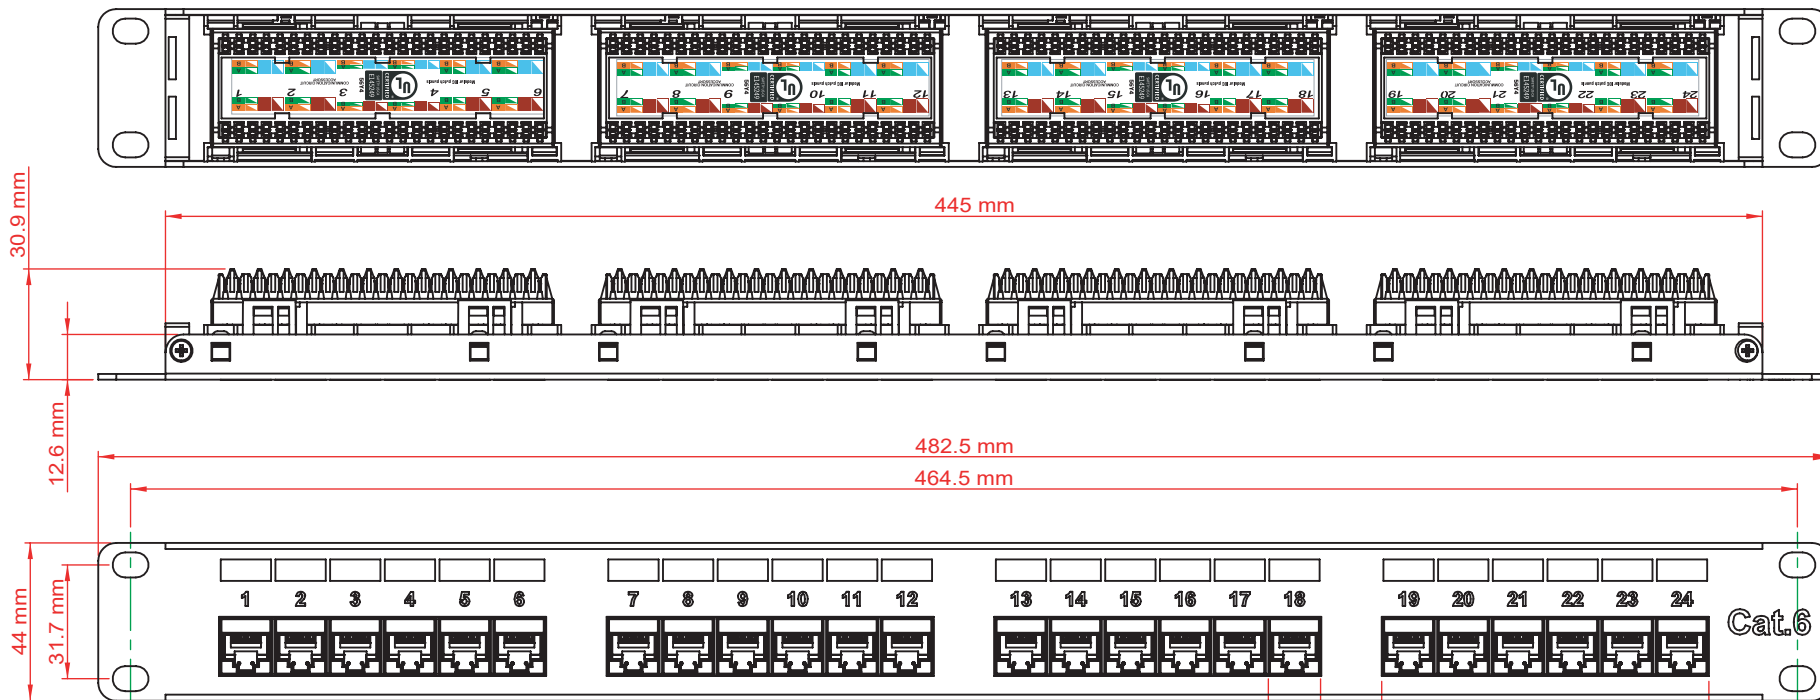


MATERIAL
 PANEL : SPCC.
 PLASTIC FRAME : ABS,UL94V-0.
 JACK CONTACTS : PHOSPHOR BRONZE,50U" GOLD PLATED.
 IDC PLASTIC : PC,UL94V-0.
 IDC CONTACT : PHOSPHOR BRONZE,TIN OVER NICKEL UNDERCOAT.
 WIRE MANAGEMENT : SPCC.

PHYSICAL CHARACTERISTICS
 SUITABLE IMPACT TOOL : 110(KRONE STYLE) PUNCH DOWN TOOL.
 INSERTION LIFE : 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
 PLUG RETENTION FORCE : 11 LBF MIN.
 DURABILITY : 200 TERMINATION CYCLES.
 CONTACT COMPATIBILITY : ACCOMMODATES 22 TO 24 AWG SOLID.
 OPERATING TEMPERATURE RANGE : -10 C TO 60 C.
 STORAGE TEMPERATURE RANGE : -40 C TO 68 C.
 HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

ELECTRICAL
 INSULATION RESISTANCE : 500 MΩ MINIMUM.
 DC CURRENT RATING : 1.5 Amps.
 INPUT TO OUTPUT D.C. RESISTANCE : 200 mΩ MAXIMUM.
 CONTACT RESISTANCE : 20 mΩ MAXIMUM.
 VOLTAGE PROOF (CONTACT TO CONTACT) : 1000 V AC.

NOTE
 * ONLY ACCEPT RJ-45 8P8C PLUG.

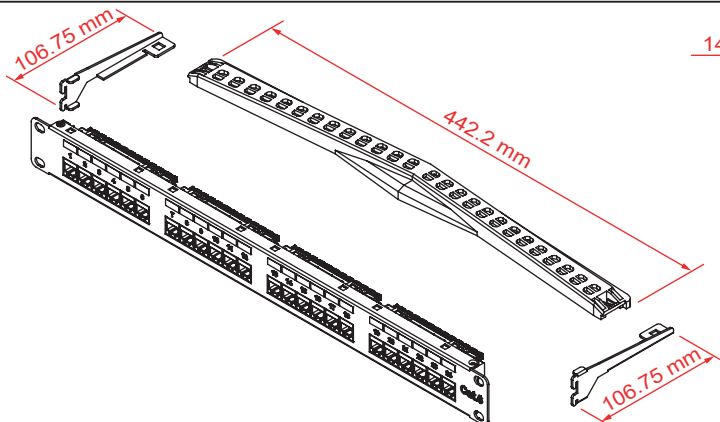


Cat 6
 56Y4
 E145249

ENCLOSURE
 NYLON CABLE TIE X 8 PCS
 WIRE MANAGEMENT X 1 PC
 INSTRUCTION X 1 PC

RoHS

UL
 CERTIFIED
 SAFETY US-CA
 E145249

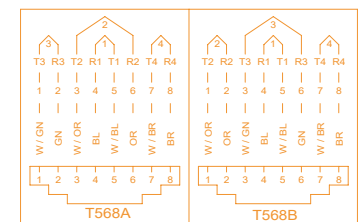

④	BAG OF SCREWS	4 M6*12 mm screws, 4 nuts, 4 shims.	1	PC
③	INSTRUCTION	An A4 sheet of paper.	1	PC
②	WIRE MANAGEMENT	442.2 * 106.75 * 26.3 (mm).	1	PC
①	NYLON CABLE TIE	Nylon cable tie * 8.	8	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION :
 Monoprice 24-port Cat6 Unshielded UL Listed Patch Panel 1U 110/Dual IDC with Wire Support Bar Metal front PoE+ (TAA)

PID # : 43540

UNIT : MM