
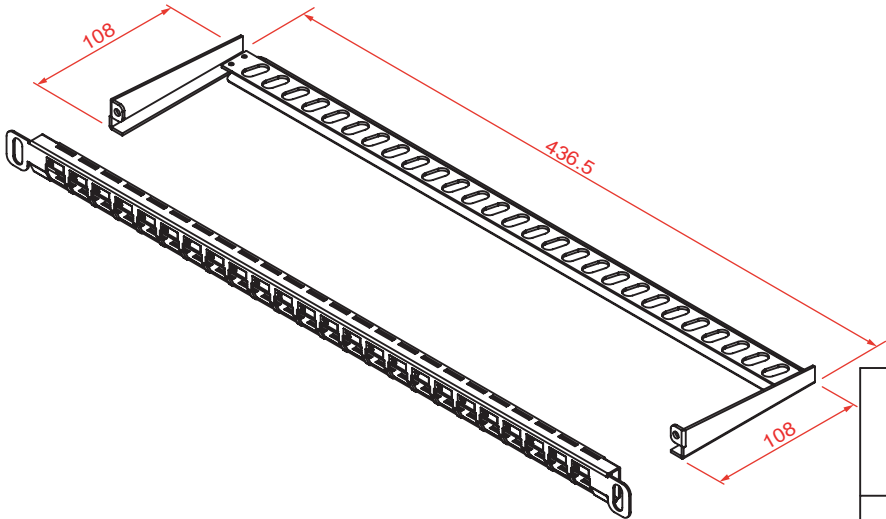


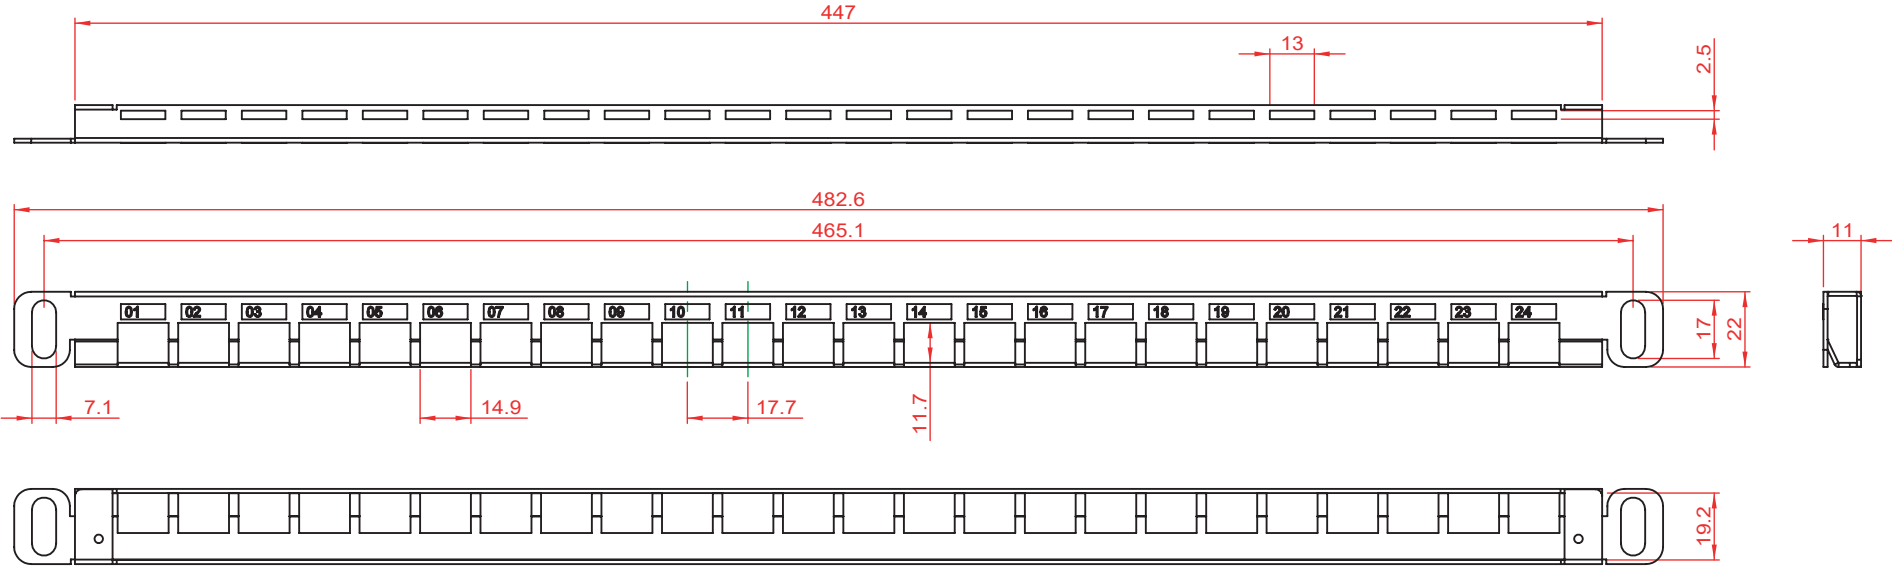


MATERIAL
PANEL : SPCC
WIRE MANAGEMENT : SPCC

PHYSICAL CHARACTERISTICS
OPERATING TEMPERATURE RANGE : -10 °C TO 60 °C.
STORAGE TEMPERATURE RANGE : -40 °C TO 68 °C.
HUMIDITY : 10% TO 90% RH (NON-CONDENSING).

ENCLOSURE
INSTRUCTION X 1 PC
WIRE MANAGEMENT X 1 PC

56Y4
E145249



MONOPRICE

④	BAG OF SCREWS	4 M6*12 mm screws, 4 nuts, 4 shims.	1	PC
③	INSTRUCTION	An A4 sheet of paper.	1	PC
②	WIRE MANAGEMENT	442.2 * 106.75 * 26.3 (mm).	1	PC
①	NYLON CABLE TIE	Nylon cable tie * 8.	8	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DESCRIPTION :		Monoprice 24-port Blank Keystone UTP Patch Panel, Half-U, with Wire Support Bar (TAA).	
PID # :		43543	
UNIT :	MM		