

ENCLOSURE
WIRE MANAGEMENT X 1 PC

MATERIAL


PANEL-FRONT : SPCC BLACK POWDER PAINTING COAT FINISH.
 PANEL-BACK : SECC WITH NICKEL UNDERCOAT.
 WIRE MANAGEMENT : SPCC BLACK POWDER PAINTING COAT FINISH.

PHYSICAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE : -10°C TO 60°C.
 STORAGE TEMPERATURE RANGE : -40°C TO 68°C.
 HUMIDITY : 10%-90%RH.



56Y4
E145249

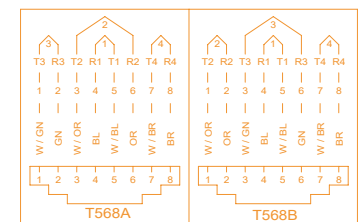

DESCRIPTION :
 Monoprice 24-port Blank Keystone Shielded Patch Panel, 1U, with Wire Support Bar (TAA).

PID # : 43544

UNIT :
MM

| NO. | PART NAME | SPECIFICATION DESCRIPTION | QTY | UNIT |
|-----|-----------------|-------------------------------------|-----|------|
| ④ | BAG OF SCREWS | 4 M6*12 mm screws, 4 nuts, 4 shims. | 1 | PC |
| ③ | INSTRUCTION | An A4 sheet of paper. | 1 | PC |
| ② | WIRE MANAGEMENT | 442.2 * 106.75 * 26.3 (mm). | 1 | PC |
| ① | NYLON CABLE TIE | Nylon cable tie * 8. | 8 | PCS |