


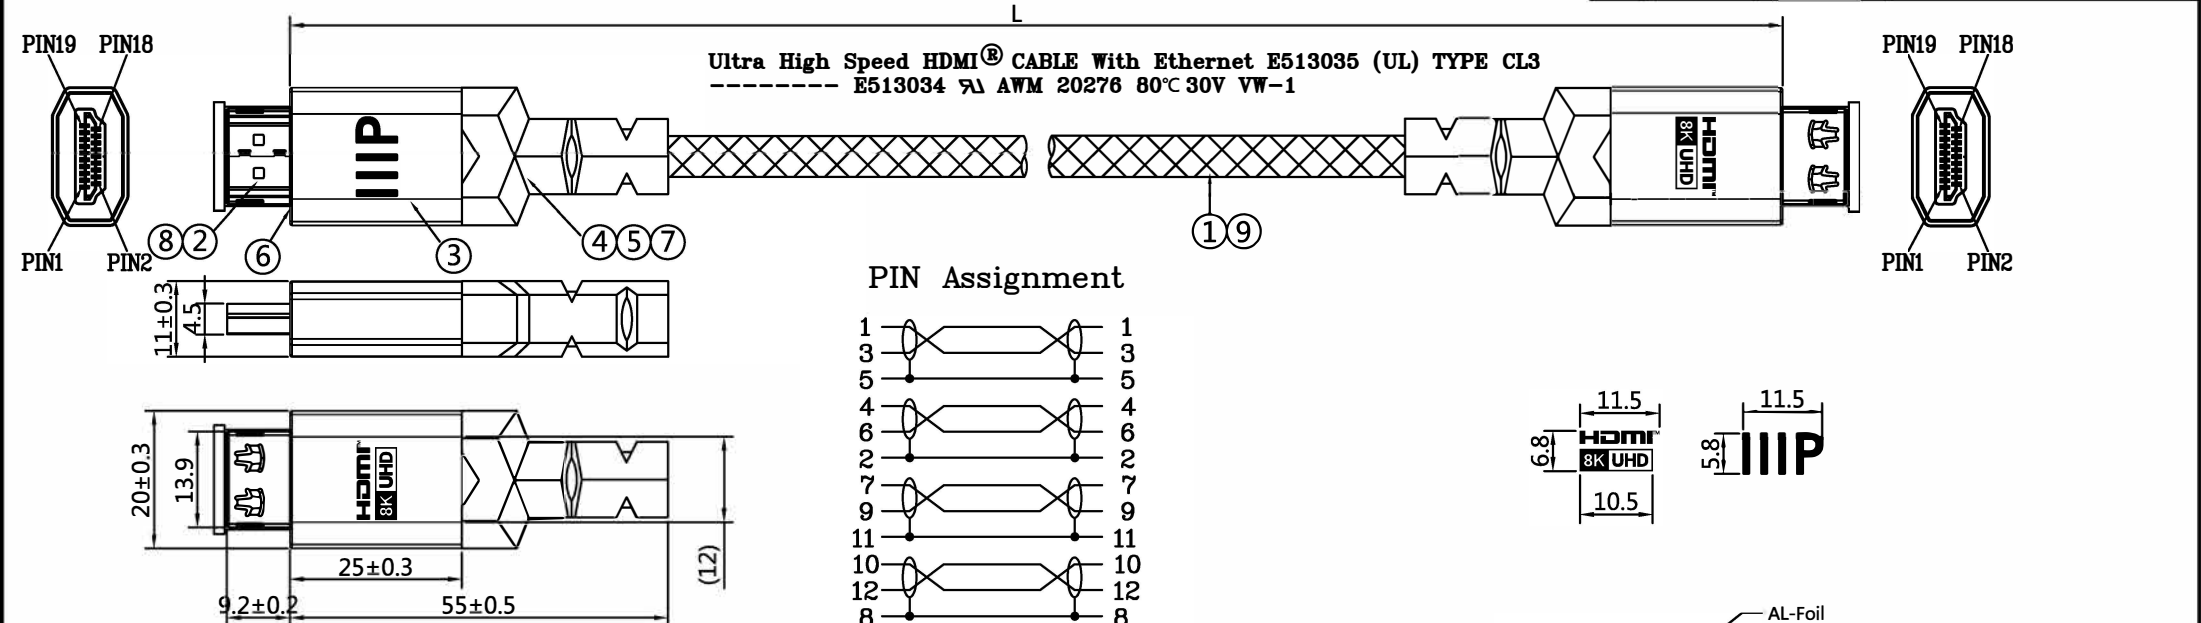

- NOTES:
- Test Condition:
(1) 100% OPEN & SHORT TEST;
(2) Insulation Resistance: DC300V 5MΩ(Min) ;
(3) Conductor Resistance: 5Ω/Max.
(4) Hi-Pot:DC 300V/0.1s.
 - The materials meet ROHS standard.
 - HDTV-DVD TEST:8K@60HZ
 - PASS 48G
 - Prop CAP 65

PIN Assignment		
1		1
3		3
5		5
4		4
6		6
2		2
7		7
9		9
11		11
10		10
12		12
8		8
14		14
19		19
17		17
13		13
15		15
16		16
18		18
SHELL		SHELL

PID # :	44714	44715	44716
LENGTH (L)	4580±50mm(15FT)	6100±70mm(20FT)	7620±70mm(25FT)

⑨	BRAID	Black braid	1	PCS
⑧	Dust Cap	HDMI A Male transparent dust cover	2	PCS
⑦	OVER MOLD	PVC 45P Black	16	g
⑥	OVER MOLD	PVC 35P Red (19-1664 TPX)	10	g
⑤	COPPER FOIL	Copper foil, W6*L30MM	2	PCS
④	INTERNAL MODEL	PE	6	g
③	Shell	HDMI Shell, aluminium alloy,space gray(PMS P 172-14C)	2	PCS
②	CONNECTOR	Lock type HDMI 2.1V AM connector, gold plated, with shielding case	2	PCS
①	CABLE	HDMI UL20276 CABLE [26AWG*1P+D+AL-foil+Adhesive-PET]*4P+ [30AWG*1P+D+AL-foil+Adhesive-PET]*1P+30AWG*4C+AL+ D+B176/0.12AL-MG Jacket: CL3 Black PVC OD:8.0mm	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

VENDOR CODE:
V16988

APPROVED BY PM & DATE
-

PM PRINT NAME
-

DESCRIPTION :
8K Ultra High Speed HDMI Cable black braided,
26AWG

PID # :
-

DATE :
2023/06/13

UNIT :
MM

SHEET:
1 OF 2

FILE NAME:
JXD-HD1326/G/BK/26AWG/WA