



RoHS COMPLIANT

REVISION INFORMATION			
Rev.	Rev. Date	Modified By	Brief Description
A1	2019.12.05		

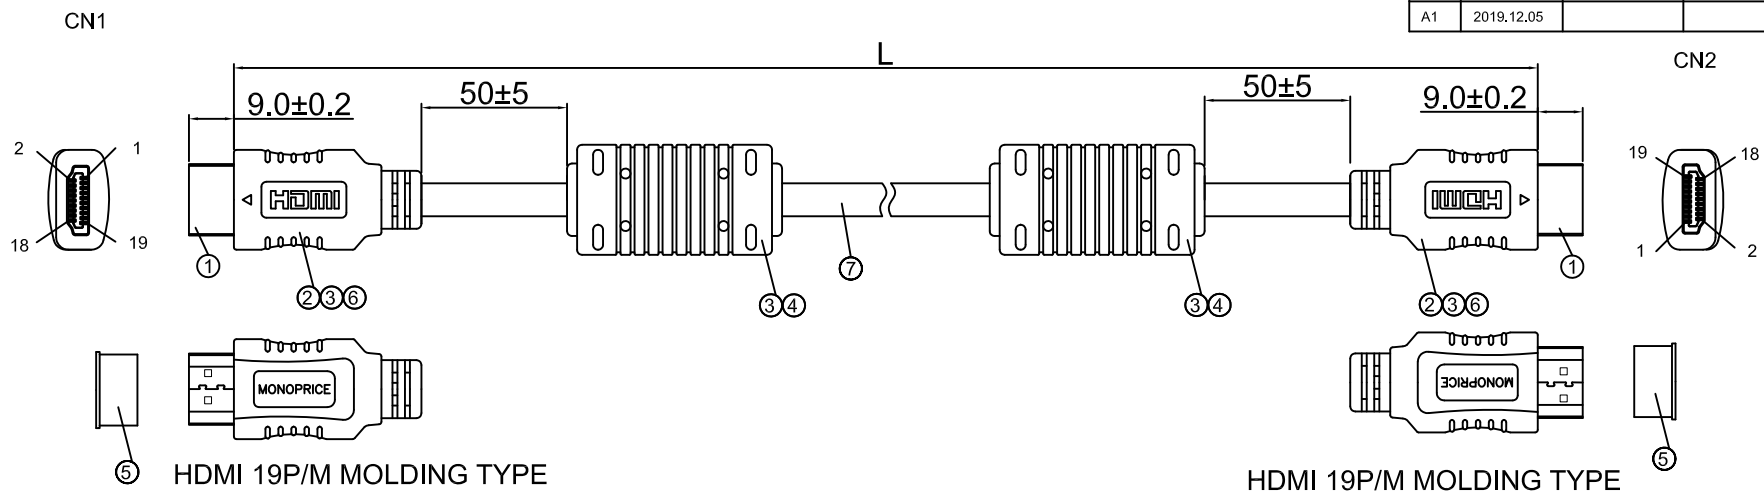

PIN OUT

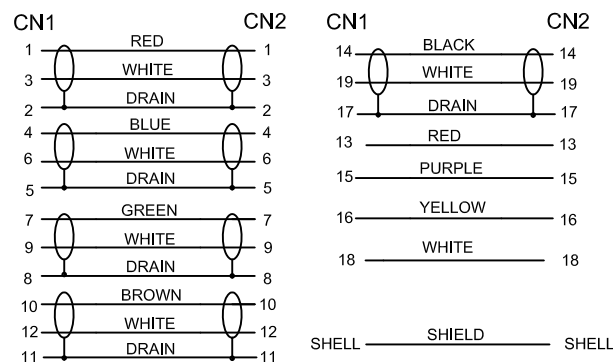

PID .	P/NO.	L/MM.	±T/MM
103872	LKD-123-0040-15	457.5	20
103871	LKD-123-0040-30	915	30
106078	LKD-123-0040-30	915	30
104956	LKD-123-0040-40	1220	40
104957	LKD-123-0040-50	1525	50
103992	LKD-123-0040-60	1830	50
104958	LKD-123-0040-80	2440	50
103993	LKD-123-0040-100	3050	50
104959	LKD-123-0040-120	3660	75
102529	LKD-123-0040-150	4575	75

CABLE ELECTRICAL TEST:

- <1>.100% OPEN SHORT & MISS WIRE TEST.
<2>.INSULATION RESISTANCE: DC300V 10Mohm MIN
<3>.CONDUCTER RESISTANCE:5 ohm MAX.

⑦	CABLE	UL20276 [(28AWGx1P+D+AL+MYLAR)x5C +28AWG*4C+AL+D+B]*1C OUTER JACKET PVC BLACK IN COLOR, OD:7.3±0.2 MARKING: "MONOPRICE High Speed HDMI™ Cable with Ethernet E202584 AWM STYLE 20276 80℃ 30V VW-1 # CSA CMG FT4 V10143 www.monoprice.com" 	1		 MONOPRICE™							
⑥	COPPER FOIL	W:25MM*T0.05MM		AR	DESCRIPTION : HDMI 19P/M-HDMI 19P/M							
⑤	DUST COVER	PE NATURAL		2								
④	CORE	17.5*28.5*9.5		2	APPROVED BY & DATE :					P/N 4958		
③	OUTER MOLD	45P PVC BLACK IN COLOR		2								
②	INNER MOLD	PE NATURAL		2	PM PRINT NAME :							
①	CONNECTOR	HDMI 19P MALE GOLD-PLATED (LCP+30%G.F) BLACK		2								
NO.	PART NAME	SPECIFICATION DESCRIPTION		QTY	UNIT	DATE :	REV :	UNIT :	SHEET:	SCALE:		
						2017/01/10	A01	MM	1 OF 1	1 : 1		