


USER MANUAL

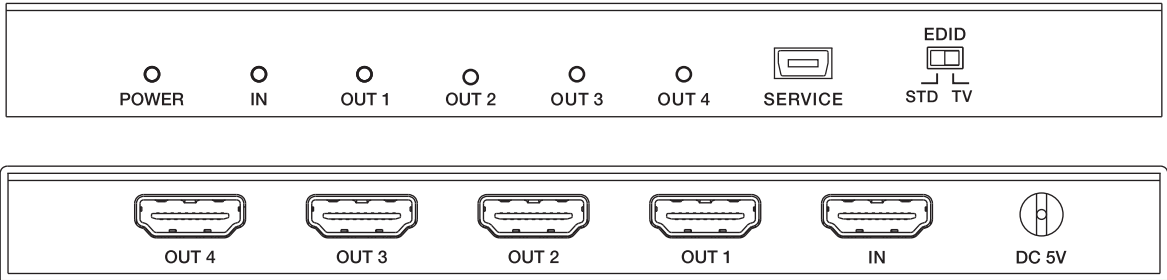

**4K60 1x4 Video Splitter with HDMI, Supports HDR,
HDCP 2.2 and YCbCr 4:4:4**

Thank You for Purchasing This Product

For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

Surge Protection Device Recommended

This product contains sensitive electrical components that may be damaged by electrical spikes, surges, electric shoo, lighting strikes, etc. Use of surge protection systems is highly recommended in order to protect and extend the life of your equipment.

Table of Contents

1. Introduction	3
2. Features	3
3. Package Contents	3
4. Specifications	4
5. Operation Controls and Functions	4
6. Application Example	6
7. Notice for FCC	7

1. Introduction

4K60 1x4 HDMI video splitter is an advanced solution for splitting a single HDMI signal to 4 HDMI displays. It provides high performance audio and video output through HDMI cables up to 4K2K@60Hz 4:4:4 and is capable of receiving and transmitting up to 18Gbps of bandwidth with no data loss. (Supporting the latest features you can be assured of reliable and high quality HDMI distribution.)

2. Features

- HDMI 2.0b, HDCP 2.2 compliant
- Supports video format up to 4K@60Hz with 8 bit RGB/YCbCr 4:4:4
- Support 3D frame sequential video format up to 1080p@60
- Supports 3D frame sequential video format up to 4K@30Hz
- Supports high resolution VESA mode video format up to QSXGA@60Hz
- Supports LPCM 7.1CH, Dolby TrueHD, and DTS-HD Master Audio
- Supports smart EDID control
- Compact design for an easy and flexible installation


3. Package Contents

- 1 × 4K60 1×4 Video Splitter with HDMI
- 1 × 5V/1A DC Power Adapter
- 1 × User Manual

4. Specifications


Technical	
Video Bandwidth	600MHz/18Gbps
Input Ports	1 × HDMI
Output Ports	4 × HDMI
Output Resolution	480i ~1080p50/60, 4Kx2K@24/30Hz, 4K2K@60Hz
ESD Protection	Human Body model: ±8kV (Air-gap discharge) , ±4kV (Contact discharge)
Power Supply	5V/1A DC (US/EU standards, CE/FCC/UL certified)
Dimensions	63mm (W) × 163mm (D) × 16mm (H)
Weight	260g
Chassis Material	Metal
Silkscreen Color	Black
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)
Power Consumption	2W

5. Operation Controls and Functions

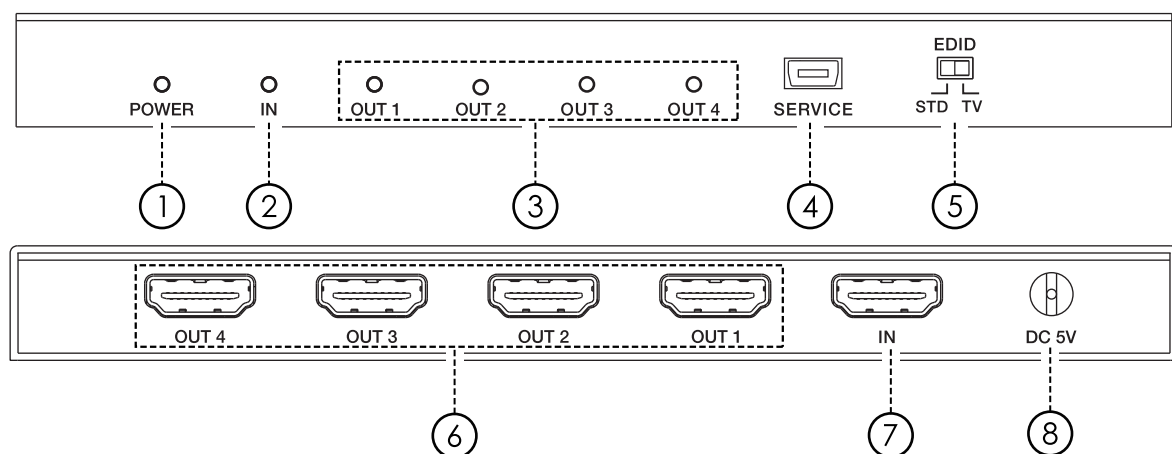

Number	Name	Function Description
1	POWER LED	This blue LED illuminate when the device is connected with power supply.
2	IN LED	This blue LED illuminate when the Source connected to the device.
3	OUT LED	These blue LEDs will light up to indicate which HDMI outputs are connected to an active TV/display/monitor.
4	SERVICE	Firmware update use only.
5	EDID STD	When in 'STD' mode, the unit will use its own built-in EDID settings. In this mode, the video output will be set to 1080p@60Hz and the audio output at LPCM 2CH Stereo. Use this mode if there are display problems in TV Mode.
	EDID TV	When in 'TV' mode, the unit will read the EDID settings of the display device connected to HDMI OUT 1. If it detects a 4K2K capable EDID setting it will transmit the signal in that format to all outputs. If no 4K2K capable EDID is detected then the unit will output the best resolution that all displays can support.
6	HDMI OUT 1~4	Connect each of the HDMI outputs to an HDMI display for simultaneous HDMI distribution, or cascade the output to another transmitter to extend the operating distance.
7	HDMI IN	Connect the input port to the HDMI splitter output of your source device such as a DVD player or set-top box with an HDMI cable.
8	DC 5V	Plug the 5V DC power supply into the unit and connected the adaptor to an AC outlet.

6. Application Example

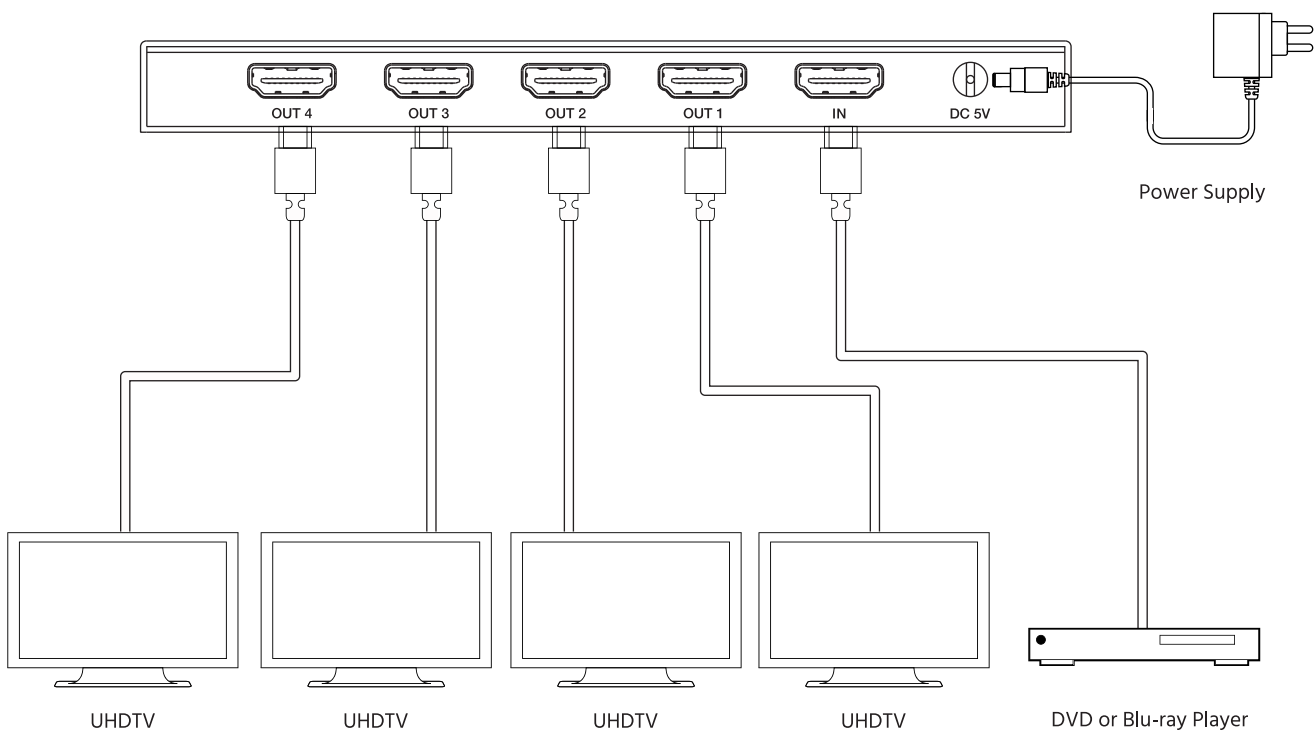

Notice for FCC



This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Modifying the equipment without Manufacturer's authorization may result in the equipment no longer complying with FCC requirements for Class B digital devices. In that event, your right to use the equipment may be limited by FCC regulations, and you may be required to correct any interference to radio or television communications at your own expense.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.