



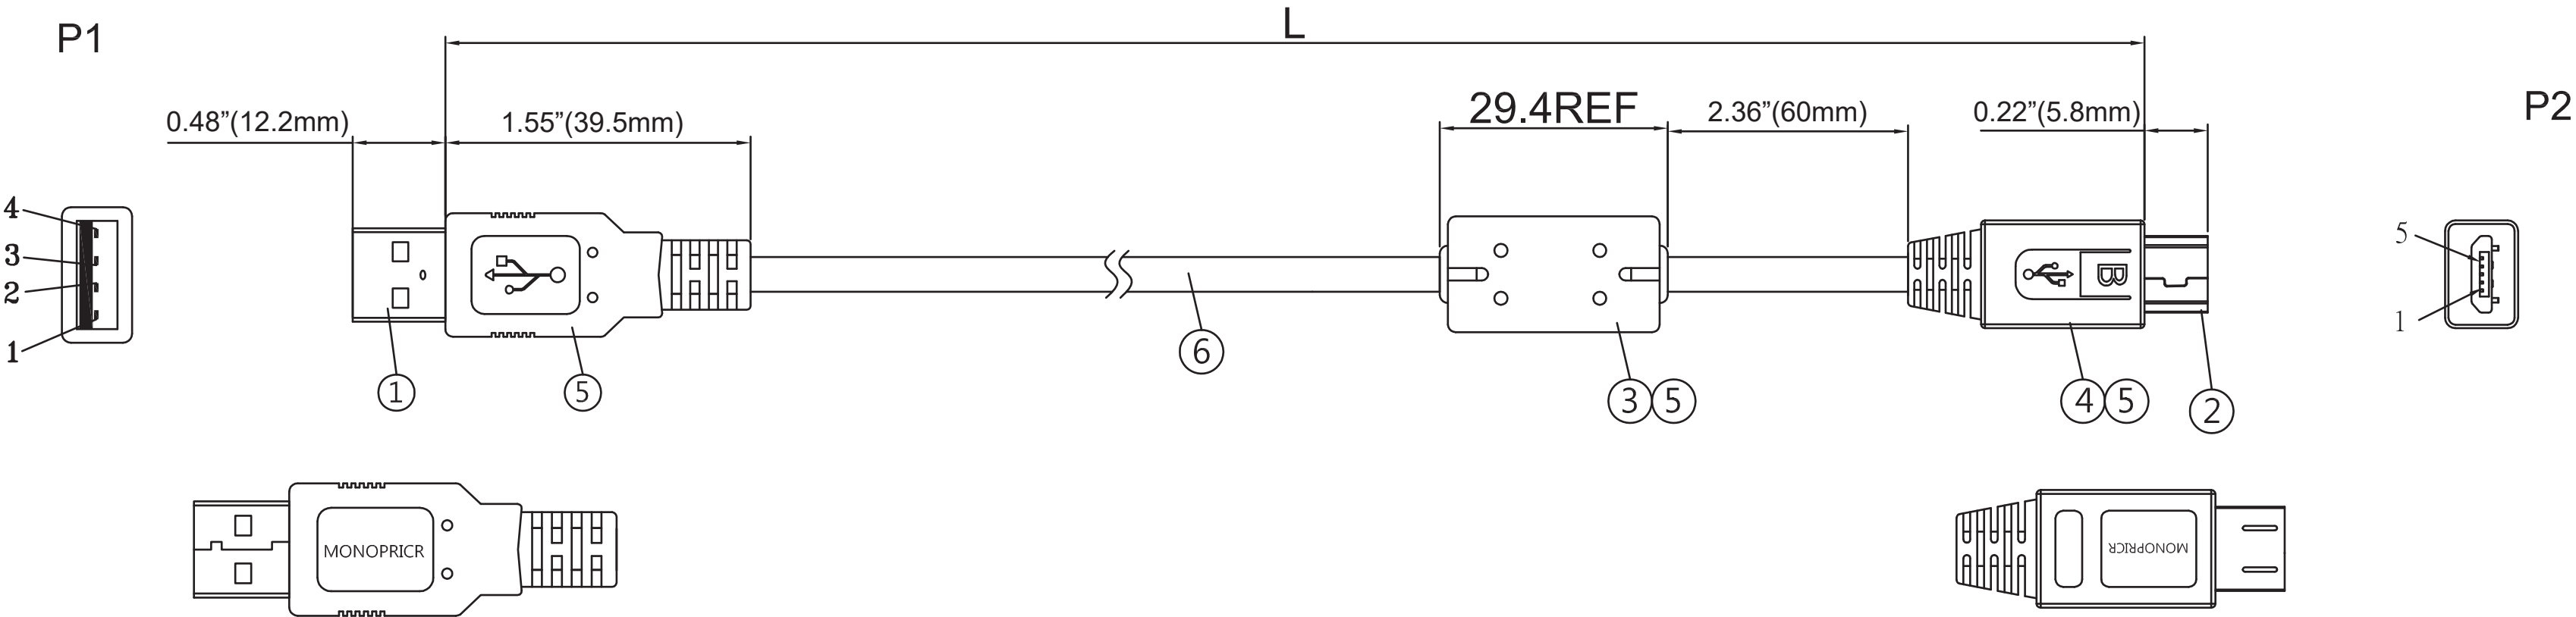

USB A/M MOLDING TYPE

PIN OUT

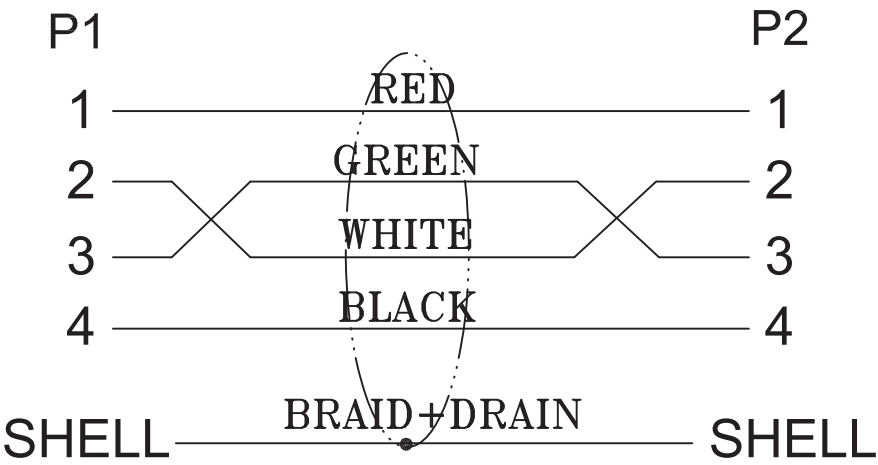

MICRO USB 5P MOLDING TYPE

PID .	P/NO.	L/MM.	±T/MM.
5456	LKD-123-0060-15	458	20
5457	LKD-123-0060-30	915	30
5458	LKD-123-0060-60	1830	50
5459	LKD-123-0060-100	3050	50
5460	LKD-123-0060-150	4575	75

CABLE ELECTRICAL TEST:

- <1>.100% OPEN SHORT & MISS WIRE TEST.
- <2>.INSULATION RESISTANCE: DC300V 10Mohm MIN
- <3>.CONDUCTER RESISTANCE:3 ohm MAX

6	CABLE	UL2725 [(28AWGx1P+24AWG*2C+A+B+D)x1C BLACK JACKET OD4.5 MARKING: "兄 AWM 2725 28AWG /1P +24AWG/2C VW-1 80℃ 30V E202584 # C兄 AWM 80℃ 30V FT1 I A E202584 # www.monoprice.com" ⚠	1	
5	OUTER MOLD	45P PVC BLACK IN COLOR	3	
4	INNER MOLD	PE NATURAL	1	
3	CORE	C5A RH10.5*5*20	1	
2	CONNECTOR	USB MICRO 5PIN M SHELL GOLD PLATED	1	
1	CONNECTOR	USB 2.0 A/M SHELL GOLD PLATED INSULATOR WHITE	1	
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

DESCRIPTION :

Monoprice™ USB-A to Micro USB-B 2.0 Cable - 5-Pin 28/24AWG Gold Plated Black 6ft

PID # : 5458

DATE : UNIT : IN / MM FILE NAME: