


RoHS COMPLIANT

REVISION INFORMATION

Rev.	Rev. Date	Modified By	Brief Description
A1	2019.12.05		

CN1

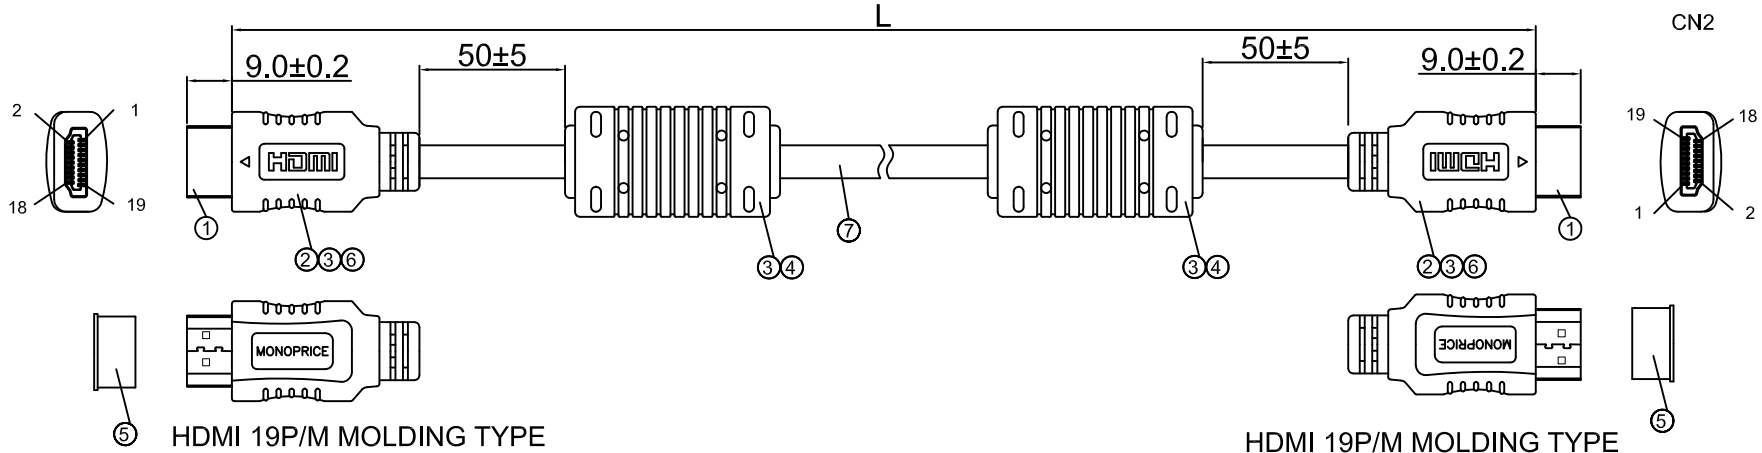

CN2

PIN OUT

CN1		CN2		CN1		CN2	
1	RED	1	14	BLACK	14	14	BLACK
3	WHITE	3	19	WHITE	19	19	WHITE
2	DRAIN	2	17	DRAIN	17	17	DRAIN
4	BLUE	4	13	RED	13	13	RED
6	WHITE	6	15	PURPLE	15	15	PURPLE
5	DRAIN	5	16	YELLOW	16	16	YELLOW
7	GREEN	7	18	WHITE	18	18	WHITE
9	WHITE	9					
8	DRAIN	8					
10	BROWN	10					
12	WHITE	12					
11	DRAIN	11					
				SHELL	SHIELD		SHELL

CABLE ELECTRICAL TEST:

- <1>.100% OPEN SHORT & MISS WIRE TEST.
<2>.INSULATION RESISTANCE: DC300V 10Mohm MIN
<3>.CONDUCTOR RESISTANCE:5 ohm MAX.

PID .	P/NO.	L/MM.	±T/MM.
103872	LKD-123-0040-15	457.5	20
103871	LKD-123-0040-30	915	30
106078	LKD-123-0040-30	915	30
104956	LKD-123-0040-40	1220	40
104957	LKD-123-0040-50	1525	50
103992	LKD-123-0040-60	1830	50
104958	LKD-123-0040-80	2440	50
103993	LKD-123-0040-100	3050	50
104959	LKD-123-0040-120	3660	75
102529	LKD-123-0040-150	4575	75

⑦	CABLE	UL20276 [(28AWGx1P+D+AL+MYLAR)x5C+28AWG*4C+AL+D+B]*1C OUTER JACKET PVC BLACK IN COLOR, OD:7.3±0.2 MARKING: "MONOPRICE High Speed HDMI™ Cable with Ethernet E202584 AWM STYLE 20276 80°C 30V VW-1 # CSA CMG FT4 V10143 www.monoprice.com" ⚠	1		 MONOPRICE™ DESCRIPTION : HDMI 19P/M-HDMI 19P/M APPROVED BY & DATE : P/N 6078 PM PRINT NAME : DATE : 2017/01/10 REV : A01 UNIT : MM SHEET: 1 OF 1 SCALE: 1 : 1 					
⑥	COPPER FOIL	W:25MM*T0.05MM	AR							
⑤	DUST COVER	PE NATURAL	2							
④	CORE	17.5*28.5*9.5	2							
③	OUTER MOLD	45P PVC BLACK IN COLOR	2							
②	INNER MOLD	PE NATURAL	2							
①	CONNECTOR	HDMI 19P MALE GOLD-PLATED (LCP+30%G.F) BLACK	2							
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT						