


Rev.	Rev. Date	Modified By	Brief Description
V1	2020/6/23		Initial Issue

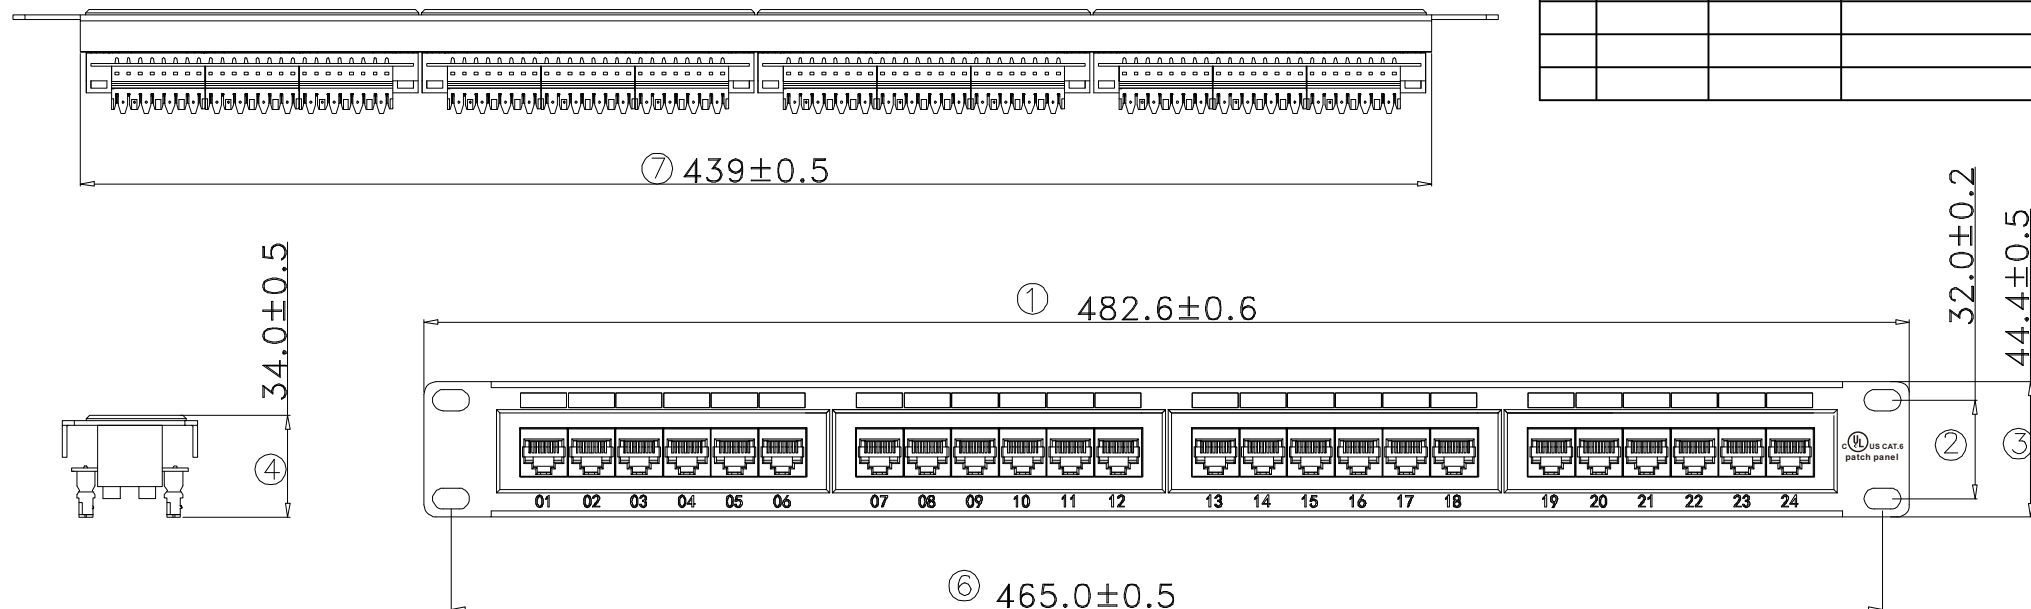

TYPE:

- 1.19" CAT6 24PORT UTP PATCH PANEL
- 2.COLOUR: BLACK
- 3.110 TYPE IDC

ELECTRICAL:


- 1.CONTACT RESISTANCE: 20m OHM
- 2.INSULATION RESISTANCE: <= 250M OHM @100 V DC
- 3.WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, I MIN
- 4.CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

- 1.STORAGE: -40°/ +70°
- 2.OPERATION: -10°/ +60°

MECHANICAL:

- 1.METAL MATERIAL: COLD ROLLED PLATE
- 2.IDC MATERIAL: NEW PC, ACCEPT 22-24AWG SOLID WIRE.
- 3.TERMINAL: PHOSPHOR BRONZE, TIN GOLD 50U"
- 4.RJ45 CONTACT LIFE: 750 TIMES MIN
- 5.IDN LIFE: 250 TIMES MIN

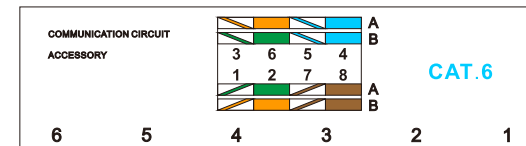

PIC						
ITEM	SCREW	NUT	GASKET	CABLE TIE	DUST COVER	WIRE STRIPPER
DESCRIPTION	M6*12mm	M6	M6	3x150mm		
Q'TY	4PCS	4PCS	4PCS	4PCS	24PCS	1PC



VENDOR CODE :

DESCRIPTION :

Cat6 Patch Panel 110 Type 24 Port
(568A/B Compatible)

APPROVED BY PM & DATE :

PID #: 7253

PM PRINT NAME :

DATE :	UNIT :	SHEET:	FILE NAME:
2020/6/23	MM	1 OF 1	PID_PRODUCT

③				
②				
①				
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT