


Rev.	Rev. Date	Modified By	Brief Description
V1	2020/6/23		Initial Issue

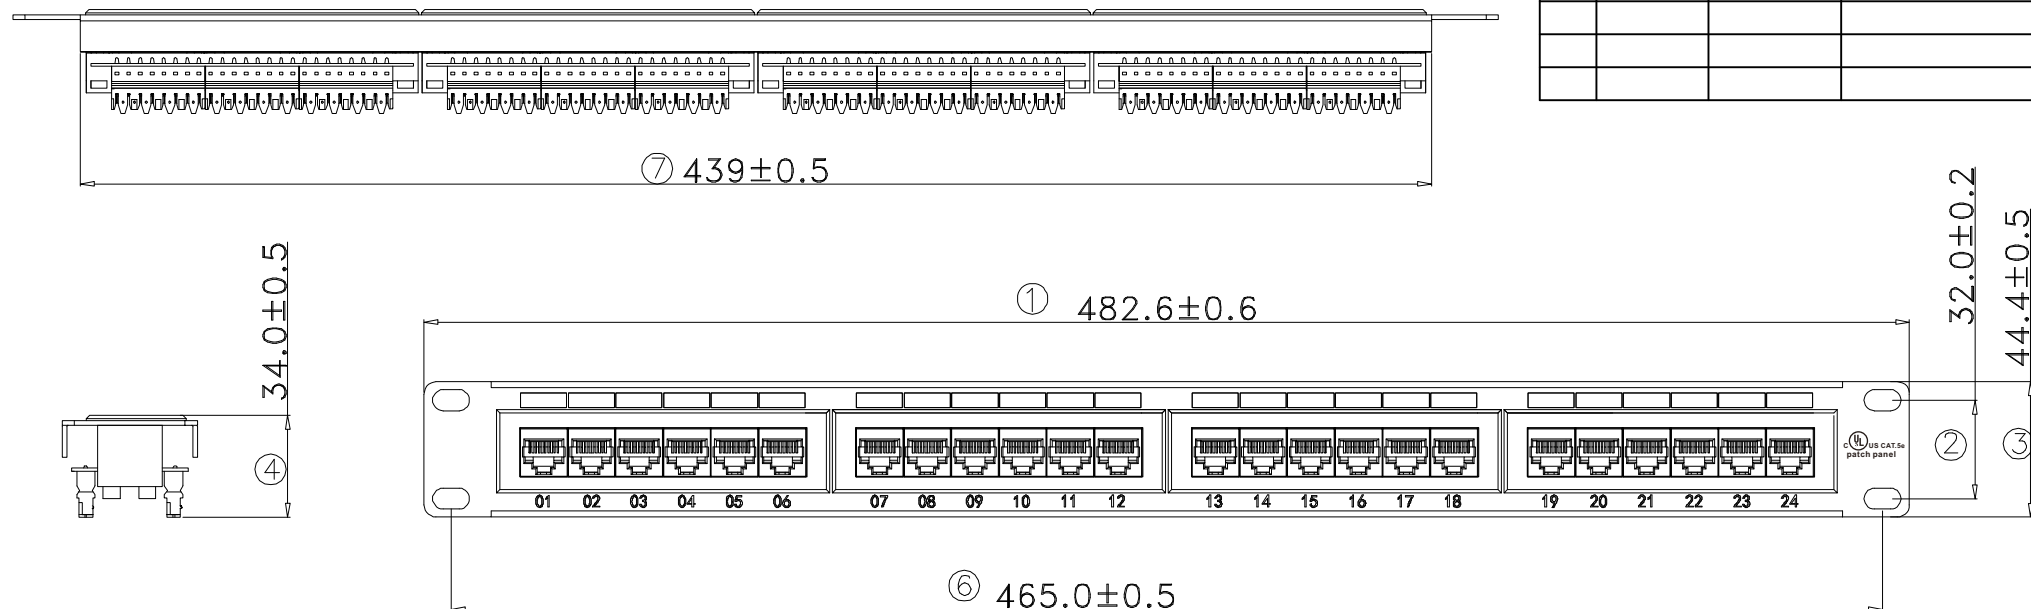

TYPE:

1. 19" CAT5E 24PORT UTP PATCH PANEL
2. COLOUR: BLACK
3. 110 TYPE IDC

ELECTRICAL:


1. CONTACT RESISTANCE: 20m OHM
2. INSULATION RESISTANCE: $\leq 100M$ OHM @100 V DC
3. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, 1MIN
4. CAT5E PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

1. STORAGE: -40°/ +70°
2. OPERATION: -10°/ +60°

MECHANICAL:

1. METAL MATERIAL: COLD ROLLED PLATE
2. IDC MATERIAL: NEW PC, ACCEPT 22-24AWG SOLID WIRE.
3. TERMINAL: PHOSPHOR BRONZE, TIN GOLD 50U"
4. RJ45 CONTACT LIFE: 750 TIMES MIN
5. IDN LIFE: 250 TIMES MIN

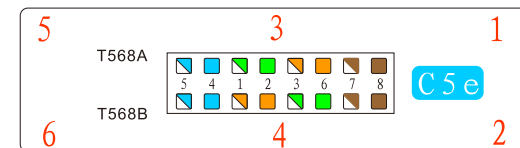

PIC						
ITEM	SCREW	NUT	GASKET	CABLE TIE	DUST COVER	WIRE STRIPPER
DESCRIPTION	M6*12mm	M6	M6	3x150mm		
Q'TY	4PCS	4PCS	4PCS	4PCS	24PCS	1PC



VENDOR CODE :

DESCRIPTION :

Cat5 Enhanced Patch Panel 110 Type 24 port
(568A/B Compatible)

APPROVED BY PM & DATE :

PID #: 7255

PM PRINT NAME :

DATE :	UNIT :	SHEET:	FILE NAME:
2020/6/23	MM	1 OF 1	PID_PRODUCT

③				
②				
①				
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT