
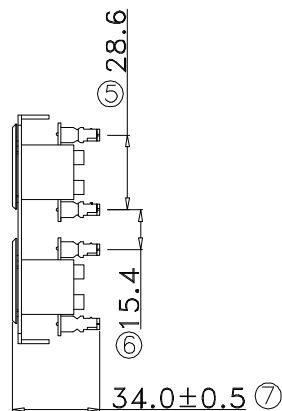


Rev.	Rev. Date	Modified By	Brief Description
V1	2020/6/23		Initial Issue

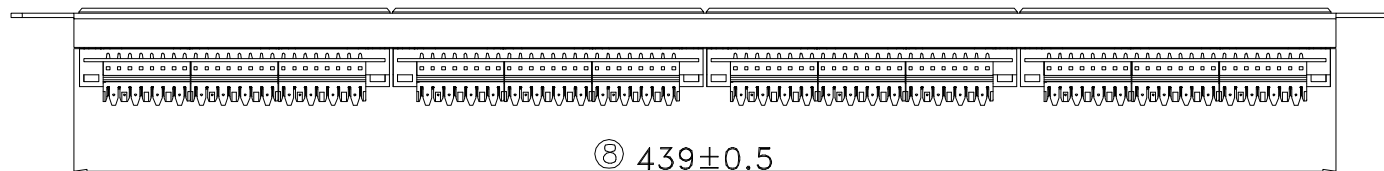

TYPE:

1. 19" CAT6 48PORT UTP PATCH PANEL
2. COLOUR: BLACK
3. 110 TYPE IDC

ELECTRICAL:

1. CONTACT RESISTANCE: 20m OHM
2. INSULATION RESISTANCE: $\leq 250\text{M OHM @100 V DC}$
3. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60Hz, Imin
4. CAT6 PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:

1. STORAGE: $-40^{\circ}/ +70^{\circ}$
2. OPERATION: $-10^{\circ}/ +60^{\circ}$

MECHANICAL:

1. METAL MATERIAL: COLD ROLLED PLATE
2. IDC MATERIAL: NEW PC, ACCEPT 22-24AWG SOLID WIRE.
3. TERMINAL: PHOSPHOR BRONZE, TIN GOLD 50U"
4. RJ45 CONTACT LIFE: 750 TIMES MIN
5. IDN LIFE: 250 TIMES MIN

COMMUNICATION CIRCUIT		ACCESSORY			
3	6	5	4	A	B
1	2	7	8	A	B
6	5	4	3	2	1

CAT.6

PIC						
ITEM	SCREW	NUT	GASKET	CABLE TIE	DUST COVER	WIRE STRIPPER
DESCRIPTION	M6*12mm	M6	M6	3x150mm		
Q'TY	4PCS	4PCS	4PCS	8PCS	48PCS	1PC


MONOPRICE

VENDOR CODE :

DESCRIPTION :

Cat6 Patch Panel 110 Type 48 Port
(568A/B Compatible)

APPROVED BY PM & DATE :

PID # : 7305

PM PRINT NAME :

DATE : 2020/6/23	UNIT : MM	SHEET: 1 OF 1	FILE NAME: PID_PRODUCT
---------------------	--------------	------------------	---------------------------

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③				
②				
①				