



REVISION INFORMATION		
Rev.	Rev. Date	Brief Description
V4	2022.12.07	Remove CSA logo
V5	2023.02.03	Update SF-87 plug size
V6	2023.03.01	Update barcode label
V7	2023.05.08	Connectors printing revised.

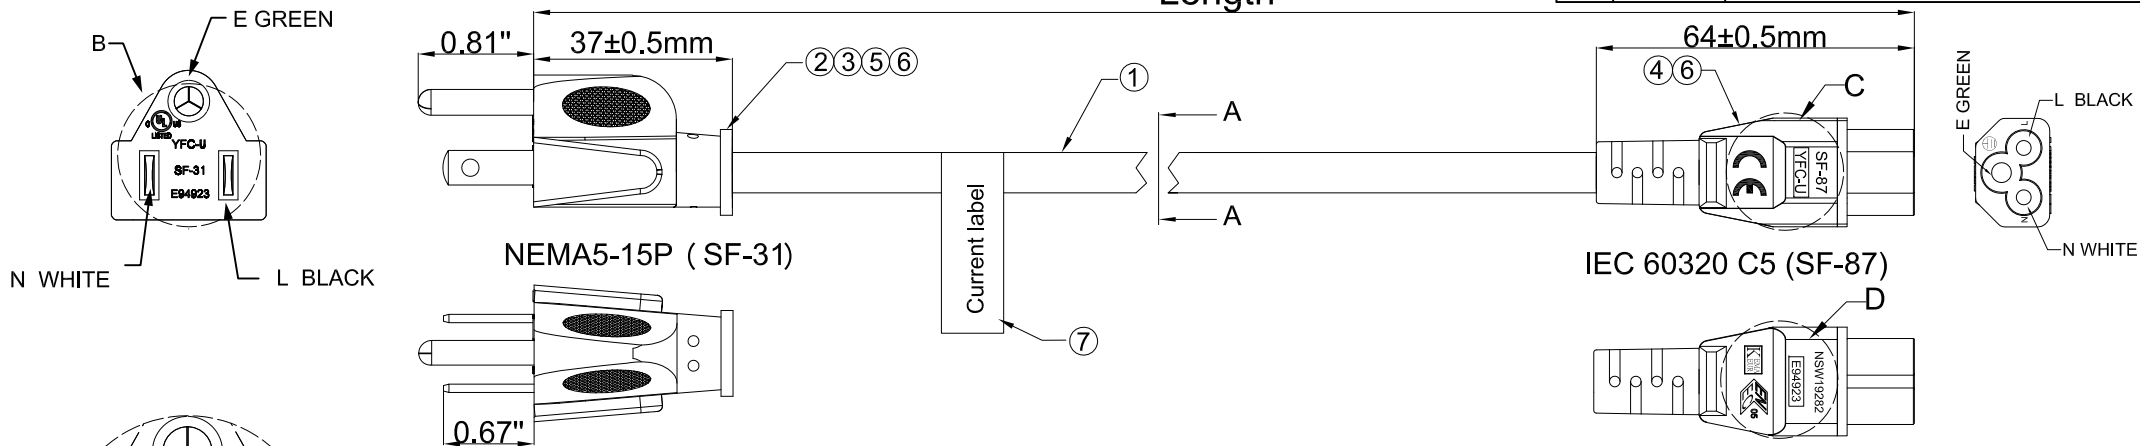


c(UL) SVT 3X0.824mm²(18AWG) 105 °C 300V FT2

c(UL) SVT 3X0.824mm2(18AWG) 105°C 300V FT2 YFC-BONEAGLE

File No. replaceable
LE WX(YFC-U)-
PH(YFC-F)

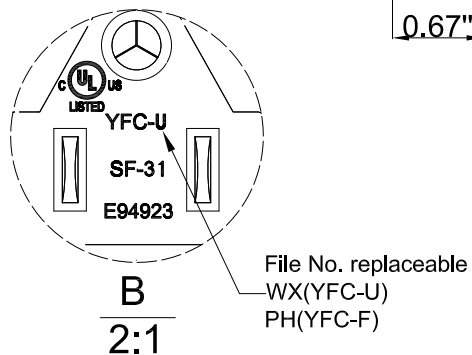

PID	Cable Color	Molding Color	SF-87 (C5) Bracket Color	Length (FT)
41083	Black	Black	Black	1±0.1
7687	Black	Black	Black	3±0.1
7688	Black	Black	Black	6±0.1
7689	Black	Black	Black	10±0.15
7690	Black	Black	Black	15±0.15



A=A Section

Pinout		
NEMA5-15P SF-31	Wire	IEC 60320 C5 (SF-87)
E	GREEN	E
N	WHITE	N
L	BLACK	L

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :1500V /1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor resistance	≤ 22.84Ω/1000m
Voltage Rating	AC 300V

⑦	Current label	Indoor Use Label 7A 125V~	1	PC
⑥	Molding	PVC 40P	AR	G
⑤	Housing	Bracket 5-15P Three Plug Black PBT UL94-V0	1	PC
④	Terminal	C5Terminal Brass Natural color With 18-14AWG PBT UL94-V0	1	PC
③	Terminal	5-15P Non-Polar, Current Carrying End, With Riveting 18-16AWG Nickel Plating	2	PC
②	Terminal	5-15P Terminal Nickel Plated 18-16AWG	1	PC
①	Cable	SVT 18AWGx3C 105℃	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

**DESCRIPTION:**

Monoprice Power Cord - NEMA 5-15P to IEC-320-C5, 18AWG, 7A/125V, SVT, 3-Prong, 6 ft, Black

PID: 7688

DATE:
2023.05.08

UNIT:
MM

FILE NAME:	PID_PRODUCT
-------------------	-------------