RoHS COMPLIANT

VERSION INFORMATION (Vendor)			
Rev.	Rev. Date	Modified by	Brief Description

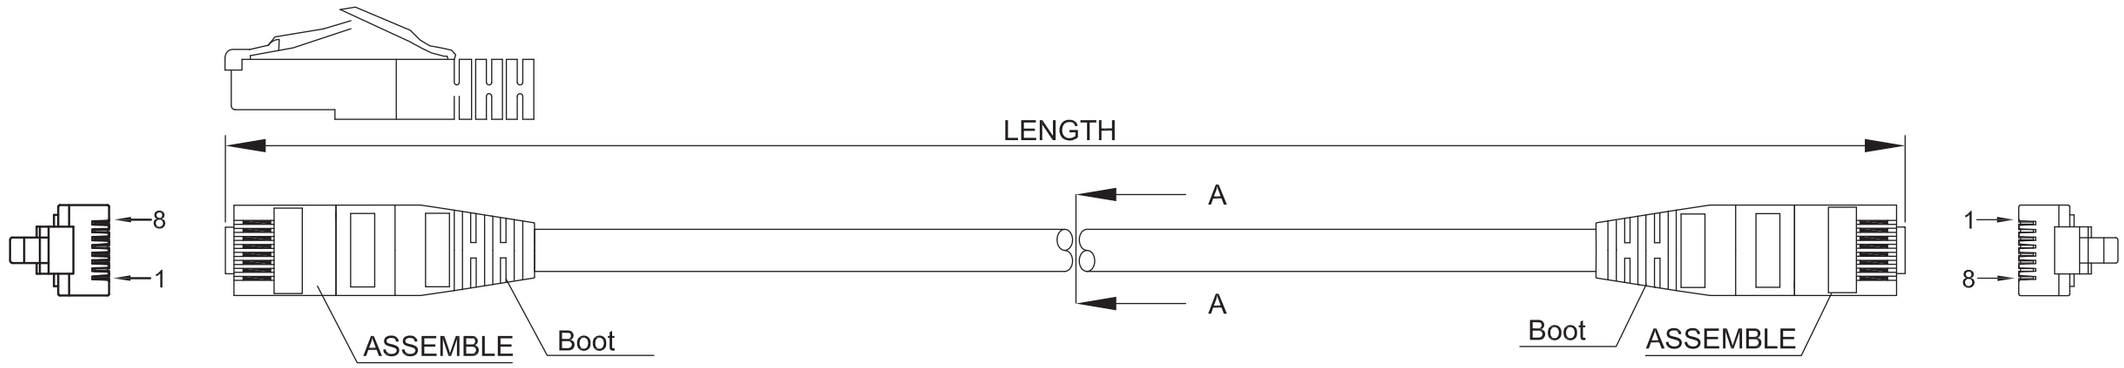

Jacket Marking: E467139 PATCH CORD UTP CATEGORY 6 28AWG 4PAIRS ANSI/TIA/EIA 568B

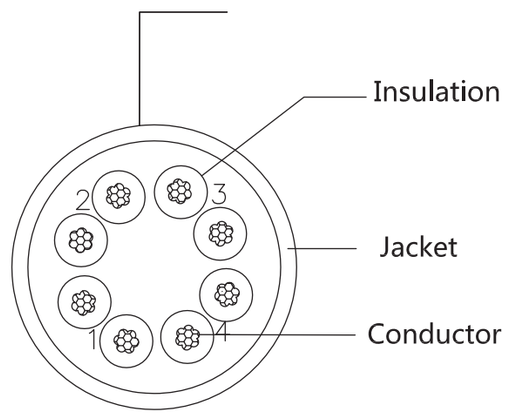

A A

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1		1	WHT/ORG
2		2	ORG
3		3	WHT/GRN
6		6	GRN
4		4	BLU
5		5	WHT/BLU
7		7	WHT/BRN
8		8	BRN

Conductor		Bare Copper 28AWG 7/0.127±0.008mm
Insulation		Thickness:MIN at any point:0.13mm MAX AVG:0.14mm Diameter:0.62±0.05mm
Jacket	PVC	Thickness:MIN at any point:0.50mm MAX AVG:0.55mm Diameter:3.8±0.2mm

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.
<2> FLUKE COMPONENT LEVEL
<3> CONDUCTOR RESISTANCE: L≤10M 10ΩMAX
10<L≤20M 15ΩMAX
20<L≤40M 25ΩMAX

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
③	Boot	Transparent Boot	2	PCS
②	Plug	RJ45 8P8C 50” Unshielded	2	PCS
①	Cable	LAN CABLE Cat.6 U/UTP 28AWGX4P STR BC PVC	1	PC

MONOPRICE

DESCRIPTION :
Monoprice SlimRun Cat6 Ethernet Patch Cable Snagless RJ45 Stranded 550MHz UTP Pure Bare Copper Wire 28AWG

PID # :

DATE :	UNIT :	FILE NAME: