

Troubleshooting

The reason for not compatible with Auto Multi-PCs Controller.

- 1.The BIOS in the mother board.
(Basic Input/Output System)
- 2.The hardware equipment.(Keyboard.Mouse)
- 3.Software.OS(Operating System)

SITUATION	SOLUTION
Mouse Hanged	<ul style="list-style-type: none">• Check whether the mouse install mouse driver.• Exchange other mouse. (PS/2 mouse only for user side)• Connect them ouse to PC directly.• Exchange the PC port.• Try to select other port and then switch back.
Keyboard Hanged	<ul style="list-style-type: none">• Exchange other keyboard.• Connect the keyboard to PC directly.• Exchange the PC port.• Try to select other port and then switch back.
Improper Operation	<ul style="list-style-type: none">• Do not move keyboard mouse or select PC if the initial turn-on operation procedure is not completed.• Adjust the dip switch.• Reboot after the PC is turned off for 5 seconds later.• Try to select other port and then switch back.

Limited

IN NO EVENT THE DIRECT VENDOR'S LIABILITY EXCEED THE PRICE PAID FOR THE PRODUCT FROM DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OF THE PRODUCT, DIST, OR ITS DOCUMENTATION.

The direct vendor makes no warranty or representation, expressed, implied, or statutory with respect to the contents or use of this documentation, and specially disclaims its quality, performance, merchantability, or fitness for any particular purpose. The direct vendor also reserves the right to revise or update device or documentation without obligation to update. For further in quires please contact your direct vendor.

Prevention

Interference:

!WARNING !!! This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions MANUAL, may cause interference to radio communications. It has been tested and found to comply with the limits for a Class A computing device pursuant to Subpart J of part 15 of FCC Rules, which are designed to provide reasonable protection against such interference when operated in a commercial environment. Operations of this equipment in a residential area is likely to cause interference in which case the user at his own expense will be required to take whatever measures may be required to correct the interference.

2-Port Auto KVM Switch

USER'S MANUAL


Please read this manual thoroughly and follow the instruction procedures to prevent any damage to the CPU SWITCH and or the connecting devices.

MPMR082-9

SPECIFICATION

FUNCTION	SPECIFICATION
Description	2 PCs to 1 User
Case design	PLASTIC CASE
PC selection method	
Keyboard Hot Keys	V
Scan Rate	5 sec/ 10 sec / 15sec 20 sec / 25sec /30 sec
PC side connectors	HD-15M x 2 MD-6M x 4
Console side connector	HD-15F x 1 MD-6F x 2
Transmission Distance	
PC side to Switch	5Meter
Console side to Switch	3Meter
CABLE	Molding with 1.2m Coaxial cable
Vertical Frequency	43-250Hz
Max. Resolution	1920 x 1440
Video Bandwidth	250MHz
Horizontal Frequency	30-180KHz

INSTALLATION

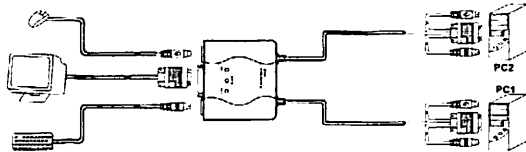

OPERATION

1. First turn on the monitor followed by the KVM switch, then the PC.
2. Make sure each PC is boot-up completely before switching the KVM switch.

To activate the

Hot Key operation :

Scroll
Lock

Scroll
Lock

To deactivate the

Press

ESC

on the keyboard.

To select the

Hot Key operation :

Scroll
Lock

Scroll
Lock

ESC

LED

After the computers are turned on, the front panel show :
PC1/PC2 LED : The LED will be lit for the PC which is selected or scanned.
AUTO LED : it's on manual mode when turn on the LED will not be lit.

Adjustment

1. 5sec .in original design.
2. Press into the Auto Scan mode.
3. Press or to choose the scan rate.

SCAN RATE	Num Lock LED	Caps Lock LED	Scroll Lock LED
5sec	OFF	OFF	ON
10sec	ON	OFF	OFF
15sec	ON	OFF	ON
20sec	OFF	ON	OFF
25sec	OFF	ON	ON
30sec	ON	ON	OFF

*Note : If the power was turned off, the scan rate will back to the default setting-5 seconds.