MONOPRICE

Blackbird 4K HDMI® 2x4 Splitter and Switch

P/N 15866

Quick Start Guide

FEATURES

- Supports HDMI[®] resolutions up to 4K@30Hz
- Supports high definition digital audio formats, including LPCM 7.1, DTS®, DSD, DTS-HD, AC3, and Dolby TrueHD™
- Supports automatic and manual switching

PACKAGE CONTENTS

Please take an inventory of the package contents to ensure you have all the items listed below. If anything is missing or damaged, please contact Monoprice Customer Service for a replacement.

1x 2x4 HDMI[®] splitter and switch

1x 5 VDC, 1A AC power adapter


1x User's manual

SPECIFICATIONS

Inputs	2x HDMI
Outputs	4x HDMI
Maximum Resolution	4K@30Hz
Video Bandwidth	10.2Gbps
Input Power	5 VDC, 1A
AC Adapter Input Power	100 ~ 240 VAC, 50/60 Hz
Operating Temperature	+32 ~ +104°F (0 ~ +40°C)
Storage Temperature	-4 ~ +140°F (-20 ~ +60°C)
Operating Humidity	20 ~ 90% RH, non-condensing
Dimensions	3.3" x 7.6" x 1.0" (85 x 192 x 26 mm)
Weight	15.9 oz. (450g)
Regulatory Compliance	CE, FCC, UL certified


PRODUCT OVERVIEW

Front Panel

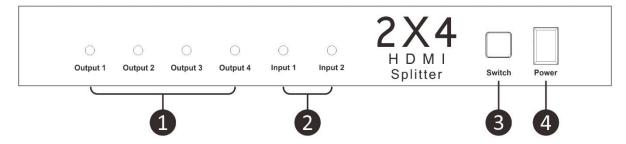

- Output LEDs: Each LED illuminates red when there is a valid connection to an active HDMI display.
- 2. **Input LEDs:** These LEDs illuminate blue when a valid connection to an HDMI source and the input is selected. They illuminate red when there is a valid connection, but the input has not been selected.
- 3. **Switch Button:** Press this button to toggle between the two inputs.
- 4. **Power Switch:** Use this switch to power the device on or off.

Rear Panel

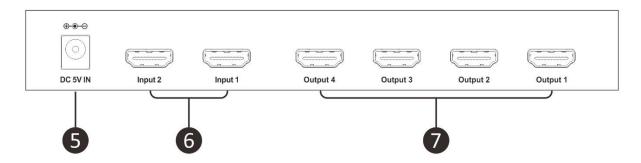

- 5. DC 5V IN: Plug the included AC power adapter into this jack.
- 6. **HDMI Inputs:** Use High Speed HDMI[®] Cables (not included) to connect to up to two HDMI source devices.
- 7. HDMI Outputs: Use High Speed HDMI® Cables (not included) to connect to up to four HDMI displays.

CONNECTIONS

- 1. Ensure all devices are powered off and unplugged from their power sources.
- 2. Use High Speed HDMI Cables (not included) to connect each output to each display.
- 3. Use High Speed HDMI Cables (not included) to connect each input to each source.
- 4. Plug the AC power adapter into the DC 5V IN jack, then into an AC power outlet.
- 5. Plug in and power on all connected equipment. Enjoy!