

①




②



Open the frame completely

③

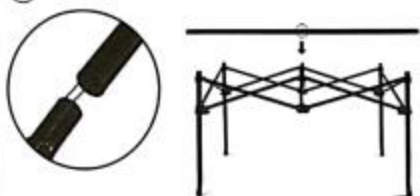

Connect the two sides of the pipe.

④



Align the buckle with the round hole.

⑤



Insert both sides of the pipe into the connection port under the table top

⑥



Attach the table top to the pipes on both sides.

⑦



Install mesh bag

⑧

