

Monoprice™

Cat6A Flexible TPE Outdoor Patch Cable

UTP, 24AWG, 500 MHz, Pure Bare Copper, Snagless RJ45, Flex Series Ethernet Cable


Monoprice™ Cat6A Flex TPE Ethernet Network Patch Cable is ultra-flexible and made with a PE + PVC compound sheath. It can withstand continuous flexing from motion applications used in the automotive, transportation, or robotics industries. The superior high-frequency characteristics and 10-GB data transmission rates of the Cat6A CM cable passed the DSX-8000 Fluke channel test @ 500 MHz and guarantee excellent performance. The durable wire offers an oil-resistant and UV-resistant jacket with a temperature range of -40 °F to 176 °F and is ideally used for industrial or outdoor environments. Made with 100% black cables and black connectors, the industry-rated 50u gold-plated plug ensures long-term network performance.

- PVC + PE jacket, ultra flexible with continuous flexing
- Ideally used for industrial, mobile, or outdoor environments
- UV-resistant; weld spatter-resistant; oil-resistant
- All-black color (black cable + black connector)
- 50u gold-plated, industry-rated, strain-relief Cat6A RJ45 connectors ensure long-term network performance

OUTDOOR APPLICATIONS

This durable wire offers anti-corrosion benefits and has superior UV resistance, oil resistance, and wear resistance. With a temperature range of -40 °F to 176 °F, it is ideally used for industrial or outdoor environments.



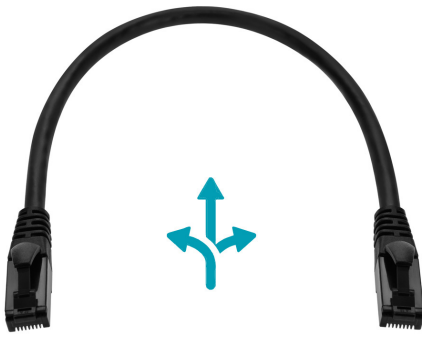


ULTRA FLEXIBLE TPE JACKET

The cable with PE + PVC compound sheath is ultra-flexible and can withstand continuous flexing from motion applications used in the automotive, transportation, or robotics industries.



SUPERIOR PERFORMANCE

Its superior high-frequency characteristics and 10-GB data transmission rates passed the DSX-8000 Fluke channel test @ 500 MHz.

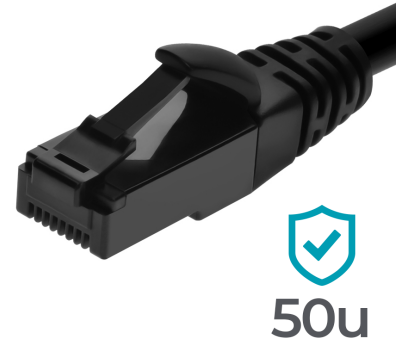

50U INDUSTRY RATED PLUG

The 50u gold-plated, strain-relief plug ensures long-term network performance.

AVAILABLE LENGTHS

1ft 44659, **2ft** 44660, **3ft** 44661, **5ft** 44662, **7ft** 44663, **10ft** 44664, **15ft** 44665, **25ft** 44666, **50ft** 44667, **100ft** 44668

Full Specs

Connection Gender	Male-to-Male
Boot Type	Snagless
Shielding	UTP
Cable Construction	Stranded
Length	1, 2, 3, 5, 7, 10, 15, 25, 50, 100 feet
Color	Black
Cable Diameter	6.00mm
Bandwidth	500MHz (test up to 1GHz)
Cable Gauge	24AWG
Packaging Method	PE Bag
Package Included Components	1x Cable