


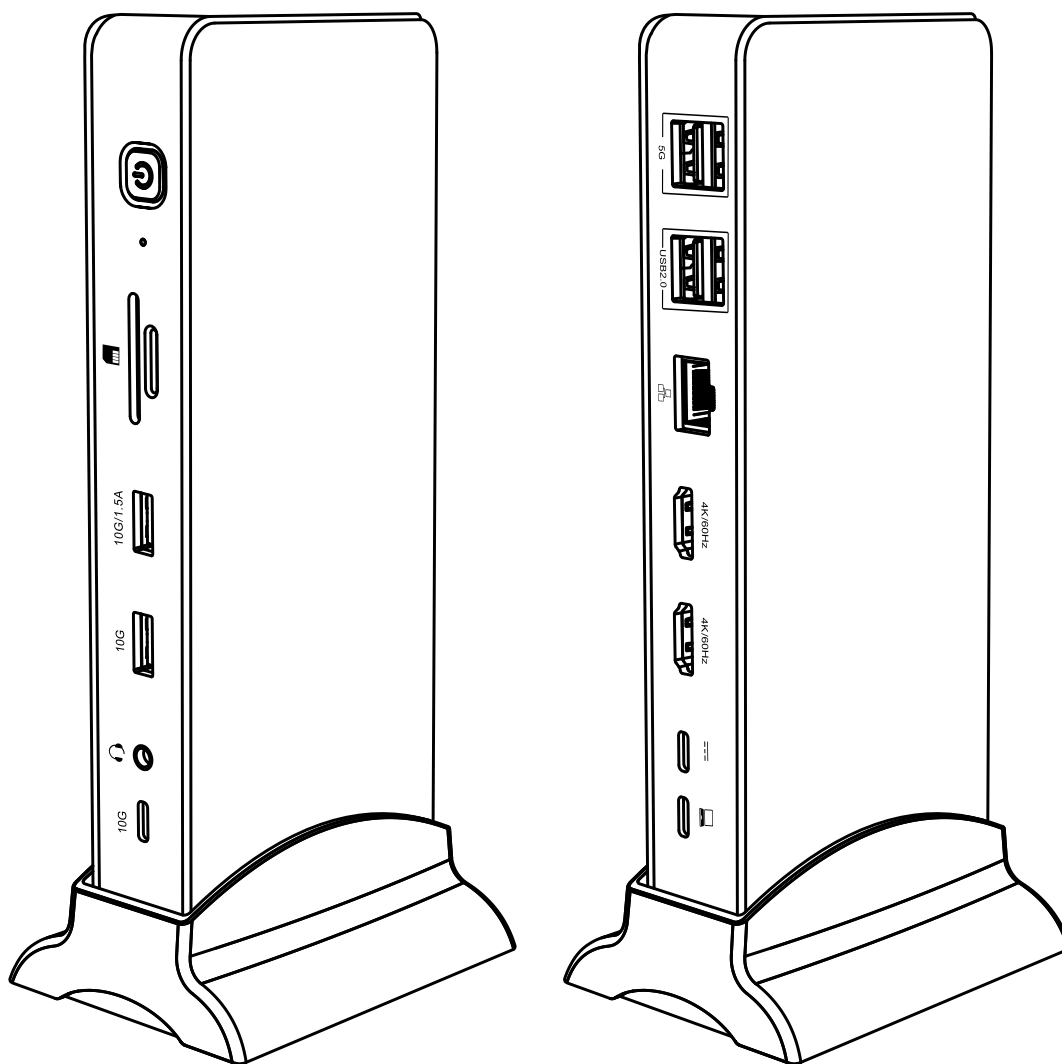

Monoprice™
14-in-1 4K60 Docking Station with Dual HDMI® & PD 3.0

P/N **47526**
User Manual

THANK YOU FOR PURCHASING THIS PRODUCT

For optimum performance and safety, please read these instructions carefully before connecting, operating, or using this product.

SAFETY WARNINGS AND GUIDELINES

Please read this entire manual before using this device, paying extra attention to these safety warnings and guidelines. Please keep this manual in a safe place for future reference.

- This docking station is intended for indoor use only.
- Do not expose this docking station to water or moisture of any kind. Do not place drinks or other containers with moisture on or near the device.
- Do not touch the docking station or any other connected cables with wet hands.
- Do not expose this docking station to excessive vibration. Do not subject the product to extreme force, shock, or fluctuations in temperature or humidity.
- Do not expose this docking station to excessively high temperatures. Do not place it in, on, or near heat sources, such as a fireplace, stove, radiator, etc. Do not leave it in direct sunlight.
- Do not place or install this docking station in an area where it can be exposed to excessive amounts of dust, humidity, oil, smoke, or combustible vapors.
- Prior to operation, check the unit for physical damage. Do not use if physical damage has occurred.
- Before plugging devices onto the docking station, ensure that both have the same type and level of power as required.
- Unplug devices from the docking station when not in use.
- Handle all cables with care to prevent damage. Avoid crimping, pinching, stepping on, or tangling them with other cords. Always route cables securely to eliminate potential tripping hazards.
- Never unplug devices by pulling on the cords and cables. Always grasp the connector head or adapter body.
- Clean using a soft, dry cloth only. Do not use chemical cleaners, solvents, or detergents. For stubborn deposits, moisten the cloth with warm water.
- This docking station has no user-serviceable parts. Do not attempt to open, service, or modify this device.

Table of Contents

SAFETY WARNINGS AND GUIDELINES	2
INTRODUCTION.....	3
FEATURES	4
PACKAGE CONTENTS	4
PRODUCT OVERVIEW.....	4
1x USB-C Female Input (Connect to Host).....	4
2x HDMI Female Outputs	5
1x USB-C Gen 2 Output (Located Near the Audio Port).....	5
2x USB-A Gen 2 Outputs.....	5
2x USB-A Gen 1 Outputs.....	5
2x USB-A 2.0 Outputs.....	6
1x RJ45 Ethernet Port.....	6
2x SD/microSD Slots.....	6
1x 3.5 mm Audio Port.....	6
1x USB-C Female Output (For PD Charging, Located Near the Upstream Port)	7
CONNECTION DIAGRAM.....	7
SPECIFICATIONS.....	8
CUSTOMER SERVICE.....	8
TECHNICAL SUPPORT	9
REGULATORY COMPLIANCE.....	9
Notice for FCC	9
Notice for ISED Canada.....	10
DISPOSAL AND RECYCLING INFORMATION	10

INTRODUCTION

This 14-in-1 dual-display docking station with PD 3.0 charging provides an all-in-one solution for power, data transfer, audio, video, SD card reading, and Ethernet connectivity. It features dual video outputs (supporting simultaneous output under MST mode on Windows systems), seven USB data ports (1 USB-C 10 Gbps, 2 USB-A 10 Gbps, 2 USB-A 5 Gbps, and 2 USB 2.0), a Gigabit Ethernet port for high-speed networking, two card slots (SD™ and microSD™), and a 3.5 mm audio port for music playback. Additionally, it supports PD charging with up to 100 W power delivery and Smart Power management. The docking station can also be used without the vertical stand when a horizontal orientation is preferred.

FEATURES

- Supports DP (DisplayPort®) 1.4 Alt Mode
- Supports up to 4K@60 Hz per HDMI port
- Supports dual 4K@30 Hz under MST (Multi-Stream Transport) mode on Windows systems
- Supports dual 4K@60 Hz under SST (Single Stream Transport) mode on Mac systems
- USB data ports support up to 10 Gbps bandwidth
- Supports Secure Digital v3.0 UHS-I (Ultra High Speed):
SDR12 (12.5 MB/s), SDR25 (25 MB/s), SDR50 (50 MB/s), DDR50 (50 MB/s), SDR104 (104 MB/s)
- Allows both card slots to function simultaneously
- Supports Gigabit Ethernet (10/100/1000 Mbps)
- 3.5 mm audio port supports up to a 192 kHz sample rate
- USB-C PD charging port supports PD (Power Delivery) 3.0 with up to 100 W and Smart Power management

PACKAGE CONTENTS

Please take an inventory of the package contents to ensure you have all the items listed below. If anything is missing or damaged, please contact Monoprice™ Customer Service for a replacement.

- 1x 14-in-1 4K60 Docking Station with Dual HDMI
- 1x USB-C Male-to-Male Cable (3.28 feet/1 meter, 10 Gbps, 5 A)
- 1x Removable Stand
- 1x User Manual

PRODUCT OVERVIEW

1x USB-C Female Input (Connect to Host)

- Supports DP 1.4 Alt Mode
- Supports reversible connection

2x HDMI Female Outputs

- Supports up to 4K@60 Hz per port
- Supports dual 4K@30 Hz under MST mode (Windows systems)
- Supports dual 4K@60 Hz under SST mode (Mac systems)
- Supports 8/10/12-bit color depth output
- Supports output pixel formats: RGB, YCbCr 4:4:4, YCbCr 4:2:2, YCbCr 4:2:0
- Supports HDCP™ 2.3 & 1.4

Note:

- When connected to a DP 1.4 Alt Mode & DSC-supported host, the maximum HDMI resolution is 4K@60 Hz (dual 4K@60 Hz).
- When connected to a DP 1.2 Alt Mode-supported host, the maximum HDMI resolution is 4K@30 Hz (dual 1080P@60 Hz) due to bandwidth limitations.

1x USB-C Gen 2 Output (Located Near the Audio Port)

- Supports up to 10 Gbps bandwidth
- Supports up to 5 V / 1.5 A downstream charging
- Includes short-circuit and overcurrent protection

2x USB-A Gen 2 Outputs

- Supports up to 10 Gbps bandwidth per port
- The port near the SD card slots supports up to 5 V / 1.5 A downstream charging; the other port supports up to 5 V / 900 mA downstream charging
- Includes short-circuit and overcurrent protection

2x USB-A Gen 1 Outputs

- Supports up to 5 Gbps bandwidth per port
- Supports up to 5 V / 900 mA downstream charging per port
- Includes short-circuit and overcurrent protection

2x USB-A 2.0 Outputs

- Supports up to 480 Mbps bandwidth per port
- Supports up to 500 mA downstream charging per port
- Includes short-circuit and overcurrent protection
- Total output of the seven USB data ports is up to 12 W (5 V / 2.4 A) when the product is not connected to a PD adapter.

1x RJ45 Ethernet Port

- Supports Gigabit Ethernet (10/100/1000 Mbps)
- Supports Wake-on-LAN
- Supports full-duplex flow control
- LED indicator status:
No light – No internet connection
Orange light – Network connection established
Green light (flashing) – Data transmission in progress

2x SD/microSD Slots

- Supports Secure Digital v3.0 UHS-I (Ultra High Speed):
SDR12 (12.5 MB/s), SDR25 (25 MB/s), SDR50 (50 MB/s), DDR50 (50 MB/s), SDR104 (104 MB/s)
- Both card slots can be used simultaneously
- The card slots feature a self-spring press mechanism


1x 3.5 mm Audio Port

- DAC output supports 44.1/48/96/192 kHz sample rate, 16/24-bit
- ADC input supports 44.1/48 kHz sample rate, 16-bit
- Supports CTIA & OMTP auto detection


1x USB-C Female Output (For PD Charging, Located Near the Upstream Port)

- Supports PD charging up to 100 W (20 V / 5 A)
- Supports Smart Power, which dynamically adjusts the charging power to the host based on the actual power consumption of the docking station and connected USB devices. At least 8 W is reserved for the docking station's operation.



CONNECTION DIAGRAM

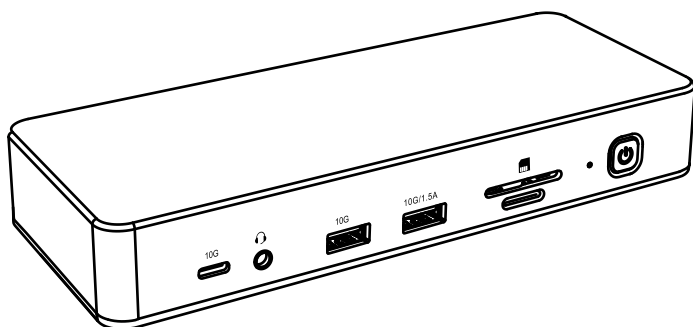

Horizontal use without stand

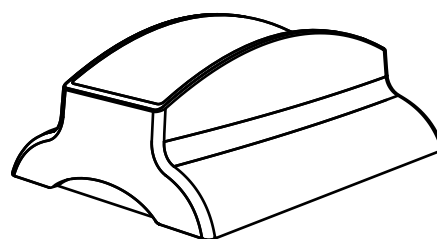

Add stand for vertical use

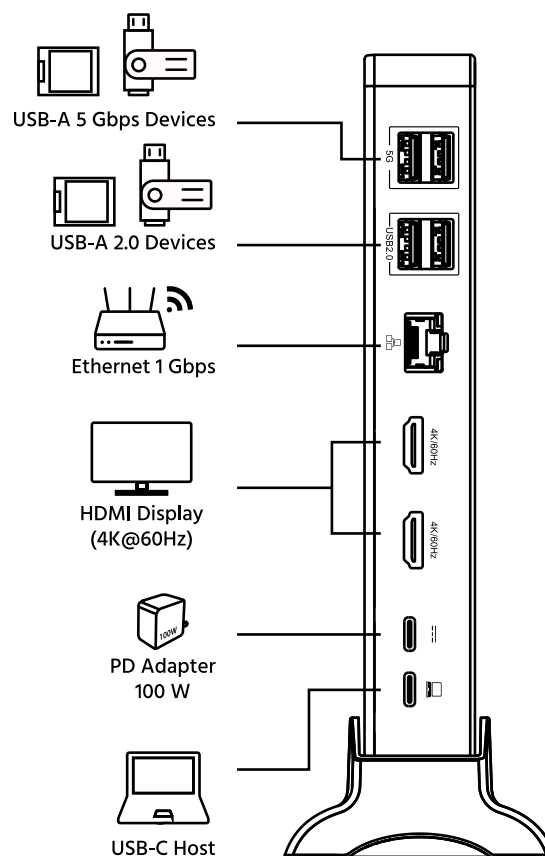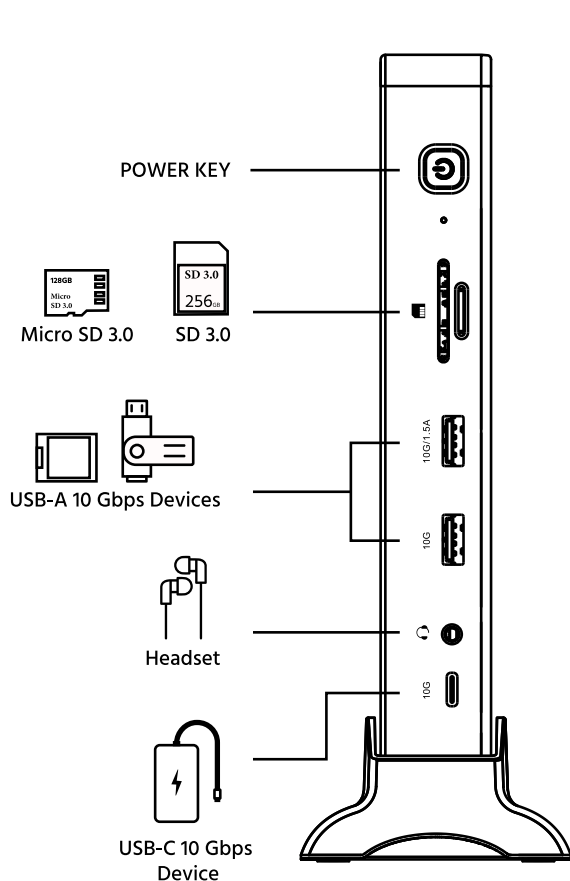

SPECIFICATIONS

Input/Output	
Input	1x USB-C Female
Output	2x HDMI Female 1x USB-C Gen 2 2x USB-A Gen 2 2x USB-A Gen 1 2x USB-A 2.0 1x RJ45 Ethernet Port 2x SD/microSD Slots 1x 3.5 mm Audio Port 1x USB-C Female (for PD charging)
Mechanical	
Size (L x W x H)	7.5" x 3.1" x 1.1" (190 x 80 x 28 mm)
Weight	19.5 oz (554 g)
Environmental	
Operating Temperature	32 °F ~ 113 °F / 0 °C ~ 45 °C
Storage Temperature	14 °F ~ 158 °F / -10 °C ~ 70 °C
Operating Humidity	10~85% RH (no condensation)
Storage Humidity	5~90% RH (no condensation)
Standby Power Consumption	< 3 W
Power Supply	USB-C PD Charging (Up to 100 W) / USB Bus Power
Limited Warranty	1 Year
Certifications	FCC
User Manual	English

CUSTOMER SERVICE

The Monoprice™ Customer Service department is dedicated to ensuring that your ordering, purchasing, and delivery experience is second to none. If you have any problems with your order, please give us an opportunity to make it right. You can contact a Monoprice™ Customer Service representative through the Live Chat link on our website **www.monoprice.com** or via email at **support@monoprice.com**. Check the website for support times and links.

TECHNICAL SUPPORT

Monoprice™ is pleased to provide free, live, online technical support to assist you with any questions you may have about installation, setup, troubleshooting, or product recommendations. If you ever need assistance with your new product, please come online to talk to one of our friendly and knowledgeable Tech Support Associates. Technical support is available through the online chat button on our website **www.monoprice.com** or through email by sending a message to **tech@monoprice.com**. Check the website for support times and links.

To download the latest drivers, firmware, manuals, etc., go to **www.monoprice.com** and type **47526** into the search bar. If available, support files are linked at the bottom of the product page.

REGULATORY COMPLIANCE

Notice for FCC



This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Modifying the equipment without Monoprice's authorization may result in the equipment no longer complying with FCC requirements for Class B digital devices. In that event, your right to use the equipment may be limited by FCC regulations, and you may be required to correct any interference to radio or television communications at your own expense.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Notice for ISED Canada

This Class B digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

DISPOSAL AND RECYCLING INFORMATION



The symbol indicates that this product should be disposed of separately from regular household waste streams. It is your responsibility to dispose of this and other electrical and electronics products via designated collection facilities appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. For more detailed information about the disposal of your unwanted product, please contact your local authorities, waste disposal service, or the shop where you purchased the product.

Monoprice™ and all Monoprice logos are trademarks of Monoprice Inc.

HDMI®, the HDMI Logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries.

SD™, microSD™, and the SD logo are trademarks of SD-3C, LLC.

DisplayPort® and the DisplayPort logo are registered trademarks of the Video Electronics Standards Association.

HDCP™ is a trademark of Digital Content Protection LLC.



TECHNOLOGY AT PRICES THAT MAKE SENSE

www.monoprice.com

Need Help? We're here for you!

Contact us: www.monoprice.com/contactus

Product pictures are for reference only.

Specifications described herein are subject to change without prior notification.

Monoprice™ and all Monoprice logos are trademarks of Monoprice Inc.

Copyright © 2025 Monoprice, Inc. All rights reserved.

Monoprice, Inc.

1 Pointe Drive, Suite 400

Brea, CA 92821 – USA

www.monoprice.com