

IMPORTANT SAFETY INSTRUCTIONS

WARNING: When using electrical products, basic cautions should always be followed, including the following:

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with a dry cloth.
7. Do not block any of the ventilation openings. Install in accordance with manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers).
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding plug. The wide blade or third prong is provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched, particularly at plugs, convenience receptacles, and the point they exit from the apparatus.
11. Note for UK only: If the colors of the wires in the mains lead of this unit do not correspond with the terminals in your plug, proceed as follows:
 - a. The wire that is colored green and yellow must be connected to the terminal that is marked by the letter E, the earth symbol, colored green, or colored green and yellow.
 - b. The wire that is colored blue must be connected to the terminal that is marked with the letter N or the color black.
 - c. The wire that is colored brown must be connected to the terminal that is marked with the letter L or the color red.
12. Only use attachments/accessories provided by the manufacturer.
13. Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
14. Unplug this apparatus during lightning storms or when unused for long periods of time.
15. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
16. Connect only to a power source of the type marked on the unit adjacent to the power supply cord. Never break off the ground pin on a power supply cord.
17. If this product is to be mounted in an equipment rack, rear support should be provided.
18. Exposure to extremely high noise levels may cause a permanent hearing loss. Individuals vary considerably in susceptibility to noise induced hearing loss, but nearly everyone will lose some hearing if exposed to sufficiently intense noise for a sufficient time. The U.S. Government's Occupational Safety & Health Administration (OSHA) has specified the following permissible Noise level exposure.

Duration per Day in hours	Sound Level dBA, slow response
8	90
6	92
4	95
3	97
2	100
1 1/2	102
1	105
1/2	110
1/4 or less	115


According to OSHA, any exposure in excess of the above permissible limits could result in some hearing loss. Ear plugs or protectors in the ear canals or over the ears must be worn when operating this amplification system in order to prevent a permanent hearing loss if exposure exceeds the limits set forth above. To ensure against potentially dangerous exposure to high sound pressure levels, it is recommended that all persons exposed to equipment capable of producing high sound pressure levels, such as this amplification systems, be protected by hearing protectors while this unit is in operation.

STAGE RIGHT

40-Watt 1x10 Bass Combo Amplifier

User's Manual

611940

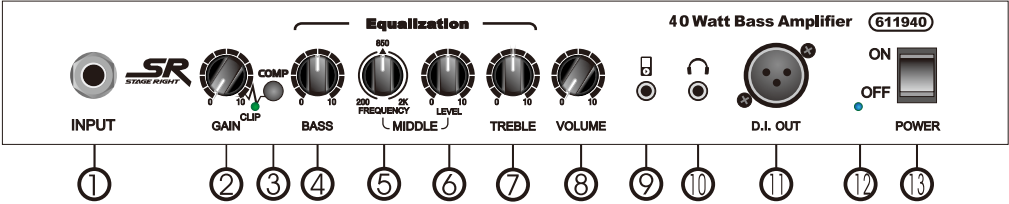

FRONT PANEL:

- (1) **INPUT:** This is an instrument input for your bass guitar, If you notice any unwanted distortion in this case, turn down the volume control on the device in question.
- (2) **GAIN:** This control is used to set the level of gain in the pre-amp section. At higher level, the signal will clip and creates distortion. The Gain knob should be used together with the Volume control to achieve desired result.
- (3) **COMP:** This turns on/off the on-board compressor. It compresses the input-signal and giving it a punchier sound. The amount of compression is controlled by the Gain knob. The Clip LED indicates when compressor is active.
- (4) **BASS:** Equalization control that adjusts the amount of boost or cut in the low frequency range.
- (5) **FREQUENCY(MIDDLE):** Selects the mid frequencies between 200Hz to 2KHz to be cut or boosted,
- (6) **LEVEL(MIDDLE):** Turn the knob clockwise to access higher mid frequencies, otherwise turn theknob anticlockwise will access the low mid-frequencies.
- (7) **TREBLE:** Equalization control that adjusts the amount of boost or cut in the high frequency range.
- (8) **VOLUME:** Sets how loud the amplifier gets.
- (9) **AUX:** For connecting any external sound device, such as CD or mp3 player.
- (10) **HEADPHONES:** Stereo headphone jack for plugging in headphones. This will disconnect the internal speaker for quiet private practising.
- (11) **D.I.:** Provides a balanced low-impedance output-signal from the pre-amplifier taken before the Master-Volume but after any tone correction. Used for direct-injection of the amplifier signal to a mixing-desk or additional power amplifier.
- (12) **POWER LED:** Indicates whether the unit is on or off.
- (13) **POWER-**This on/off switch provides power to the unit.



Intended to alert the user to the presence of uninsulated 'Dangerous Voltage' within the products enclosure that may be sufficient to constitute a risk of electrical shock to persons.



Intended to alert the user of the presence of important operating and maintenance (Servicing) instructions in the literature accompanying the product.

CAUTION: Risk of electrical shock - DO NOT OPEN.
To reduce the risk of electrical shock, do not remove the cover. No user serviceable parts inside. Refer servicing to qualified personnel.

WARNING: To prevent electrical shock or fire hazard, do not expose this appliance to rain or moisture. Before using this appliance please read the operating instructions for further warnings.

TECHNICAL SPECIFICATIONS	
Rated Power	40 Watts RMS @ 4 Ohms load
Frequency Response	50 Hz to 8 kHz
Total Harmonic Distortion	0.5% (typical)
Hum and Noise	-75 dB below rated power
Input Impedance	220 k Ohms
Power Consumption	80 Watts maximum
Maximum Input Level	5 vrms
Maximum Gain	48 dB EQ centered, level max
Dimension	17.5”x 16.7”x 11.8” (445 H x 425 W x 300mm D)
Weight	26.5lb(12.0 kg)



In order to reduce environmental damage, at the end of its useful life, this product must not be disposed of along with normal household waste to landfill sites. It must be taken to an approved recycling centre according to the recommendations of the WEEE (Waste Electrical and Electronic Equipment) directive applicable in your country.



* Appearance and specifications of this product are subject to change without prior notice.