RoHS COMPLIANT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description



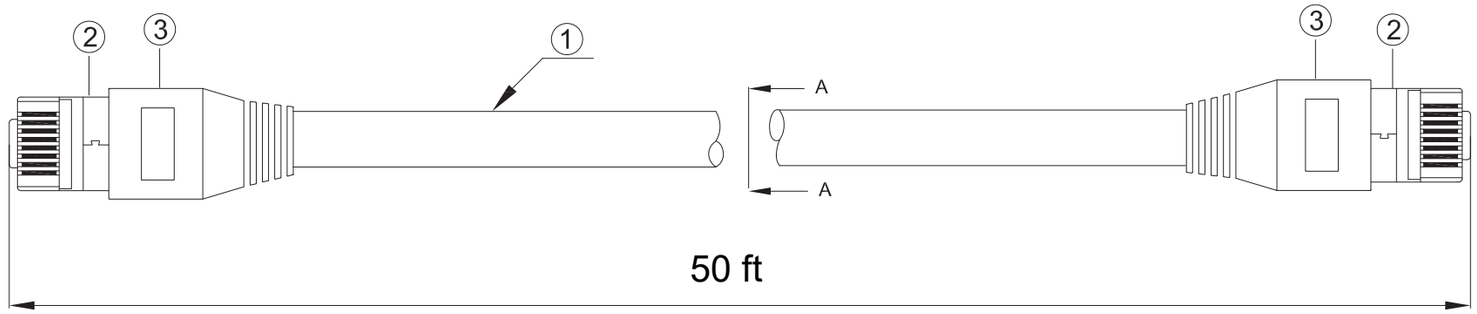

Marking: CAT.6 F/UTP ETL VERIFIED TO ANSI/TIA-568.2-D ▲ 23AWGX4P CMP (UL) c(UL)
<FP1735> E164469 WWW.MONOPRICE.COM

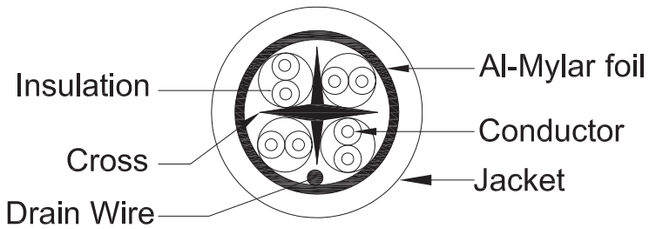

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1		1	WHT/ORG
2		2	ORG
3		3	WHT/GRN
6		6	GRN
4		4	BLU
5		5	WHT/BLU
7		7	WHT/BRN
8		8	BRN

Conductor		Bare Copper 23AWG (1/0.583±0.015mm)
Insulation		Thickness:MIN at any point:0.228mm MAX AVG:0.25mm Diameter:1.39±0.08mm
Jacket	CMP	Thickness:MIN at any point:0.50mm MAX AVG:0.60mm Diameter:7.3±0.3mm

NOTE
1.ELECTRICAL TEST
<1>100% TEST(OPEN,SHORT,MISS WIRE)
<2>FLUKE CHANNEL LEVEL 1DB↑
<3>CONDUCTOR RCSISTANCE: L≤10M 10ΩMAX
10<L≤20M 15ΩMAX
20<L≤40M 25ΩMAX

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
3	ASSEMBLE+BOOT	Assemble + BOOT	2	AR
2	PLUG	8P8C 50u"	2	pcs
1	CABLE	C6 FTP (With Cross) 23 AWG 4P PVC CMP	AR	ft

MONOPRICE

DESCRIPTION :
Monoprice Cat6 Ethernet Patch Cable - 23AWG, F/UTP, CMP Plenum Rated, 50ft, Black

PID # : 31042

DATE :
UNIT : ft
FILE NAME: