




1. Electrical test:
100% conduction test, short circuit, open circuit and dislocation
On resistance: $\leq 3\Omega$
Insulation resistance: DC300V, $\geq 10M\Omega$
2. Bending test: 200g, $\pm 60^\circ$, 30times/min, 3000 times no abnormality

⑦	Aluminum shell	USB AM black aluminum shell,RoHS	1	PCS
⑥	Aluminum shell	TYPE-C black aluminum shell,RoHS	1	PCS
⑤	Mold	98A BLACK TPE mold, RoHS	4.5	G
④	Mold	80A BLACK TPE mold, RoHS	8	G
③	Connector	TYPE-C Connector,RoHS	1	PCS
②	Connector	USB AM Connector,Nickel plated,RoHS	1	PCS
①	Cable	Ø3.6[30#(7/0.10TS+250D NY)2C+24#(26*0.10TS+250D NY)*2C+F+AL+B],Woven in black polyester silk,RoHS.	1	PCS
NO	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

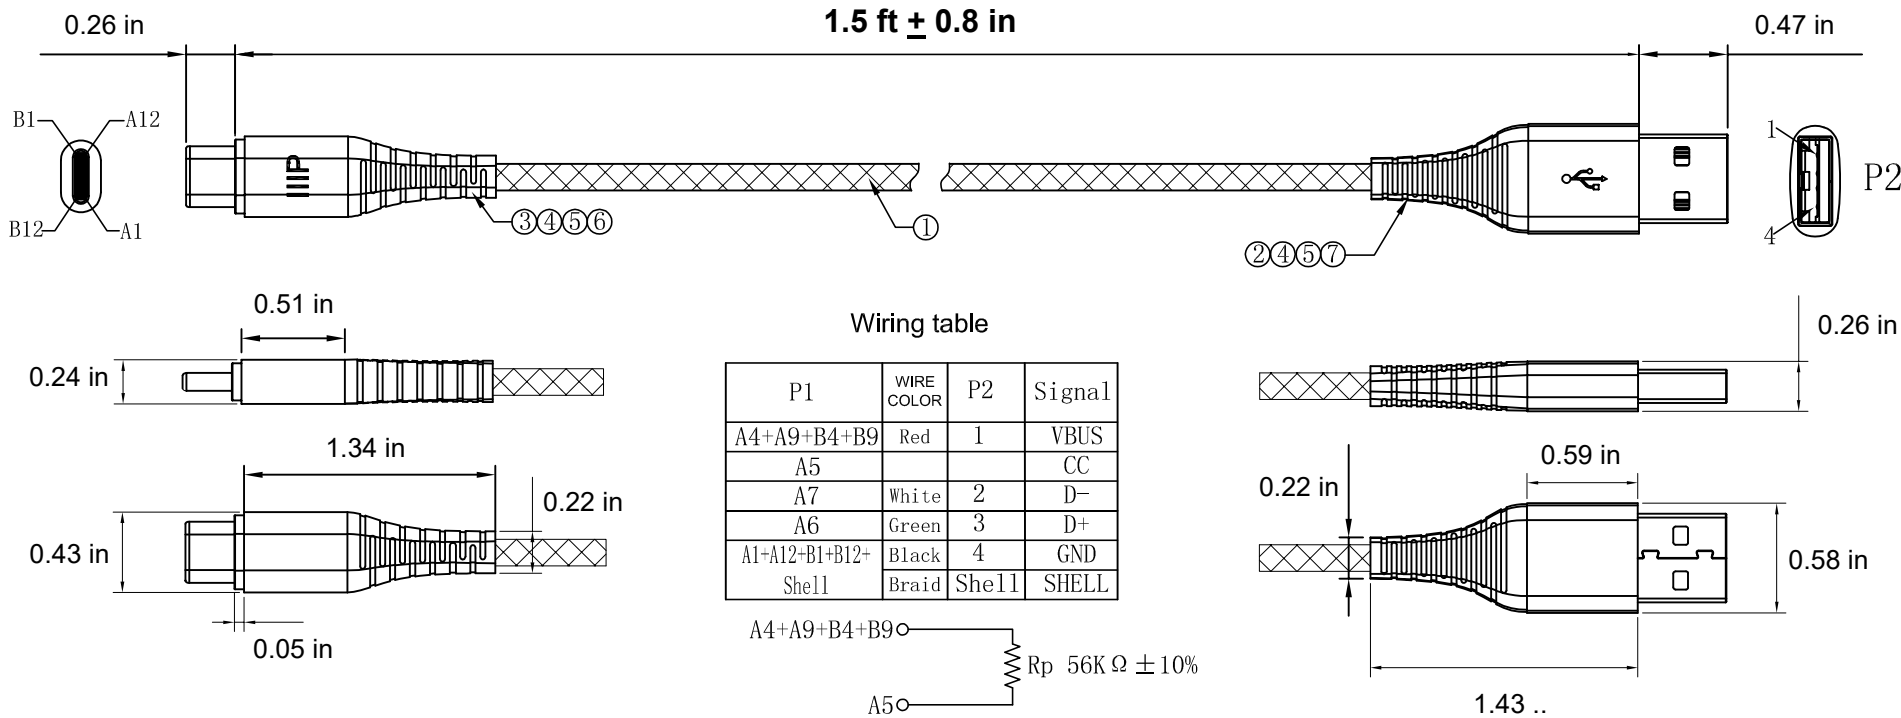

DESCRIPTION :
Monoprice AtlasFlex Series Durable USB 2.0 USB-C to USB-A Charge & Sync Reinforced Nylon-Braid Cable, 1.5ft, Black

PID # : 31202

DATE :	UNIT : ft / in	FILE NAME :
--------	----------------	-------------