


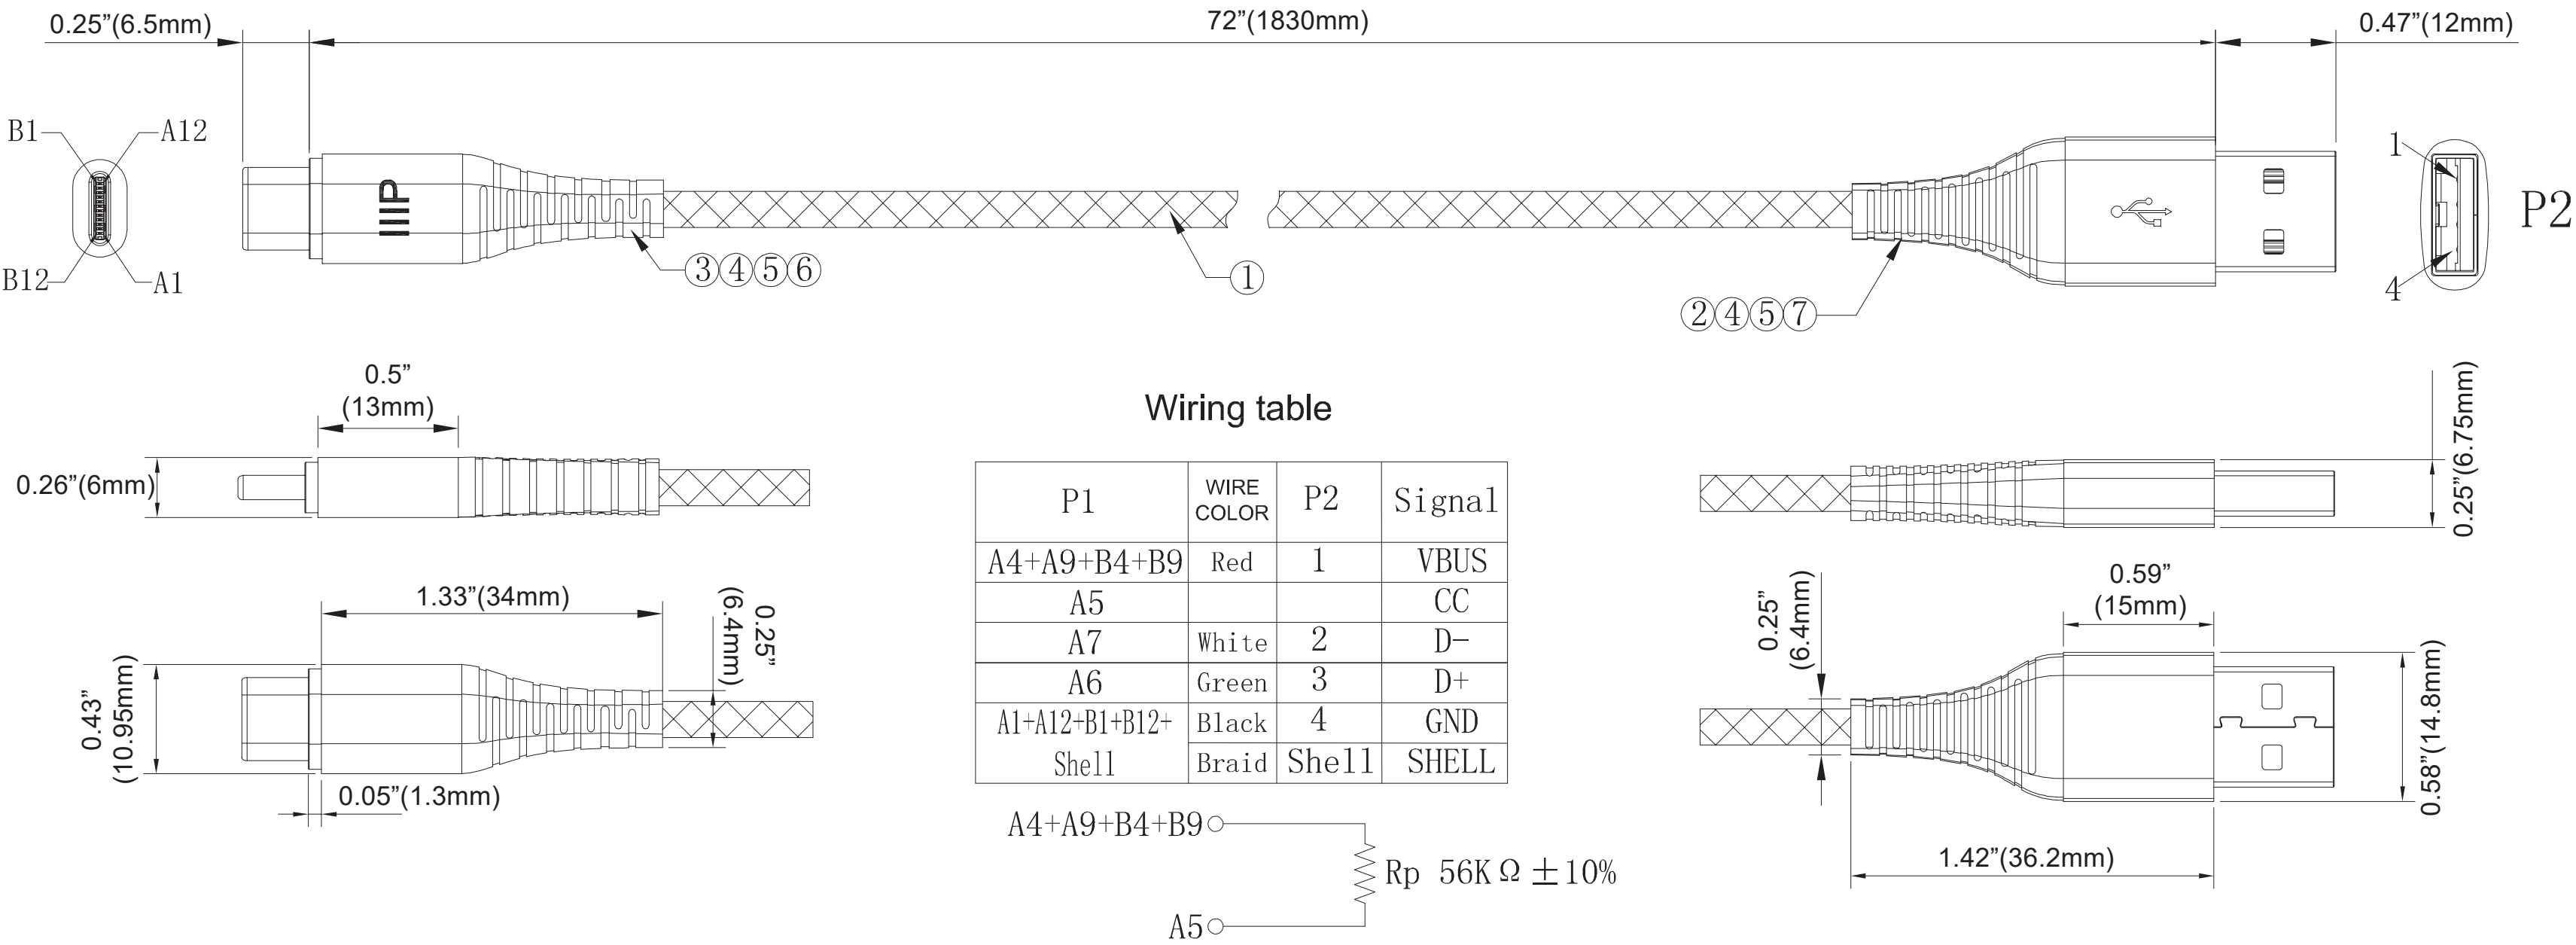

1.Electrical test:  
100% conduction test, short circuit, open circuit and dislocation  
On resistance: ≤3Ω  
Insulation resistance: DC300V, ≥10MΩ  
2.Bending test: 200g, ±60° , 30times/min, 3000 times no abnormality

|     |                |                                                                                                     |     |      |
|-----|----------------|-----------------------------------------------------------------------------------------------------|-----|------|
| 7   | ALUMINUM SHELL | USB AM black aluminum shell, RoHS                                                                   | 1   | PCS  |
| 6   | ALUMINUM SHELL | TYPE-C black aluminum shell, RoHS                                                                   | 1   | PCS  |
| 5   | MOLD           | 98A BLACK TPE mold, RoHS                                                                            | 4.5 | G    |
| 4   | MOLD           | 80A BLACK TPE mold, RoHS                                                                            | 8   | G    |
| 3   | CONNECTOR      | TYPE-C Connector, RoHS                                                                              | 1   | PCS  |
| 2   | CONNECTOR      | USB AM Connector, Nickel plated, RoHS                                                               | 1   | PCS  |
| 1   | CABLE          | Ø3.6[30#(7/0.10TS+250D NY)2C+22#(29*0.12TS+250D NY)*2C+F+AL+B], Woven in black polyester silk, RoHS | 1   | PCS  |
| NO. | PART NAME      | SPECIFICATION DESCRIPTION                                                                           | QTY | UNIT |

DESCRIPTION :

Monoprice™ AtlasFlex Series Durable USB 2.0 USB-C to USB-A Charge & Sync Reinforced Nylon-Braid Cable 6ft Black

PID # : 31204

DATE : UNIT : IN / MM FILE NAME: