

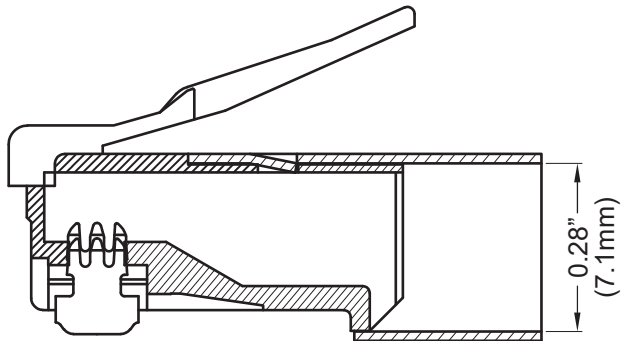
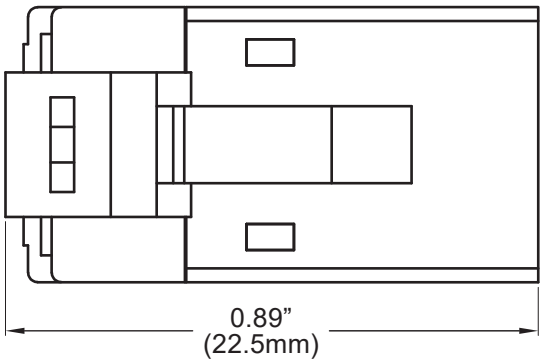
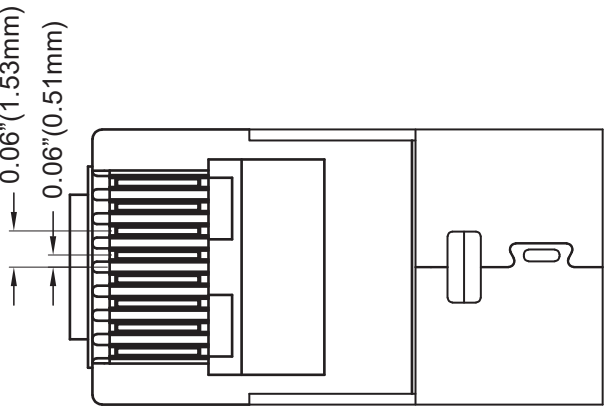
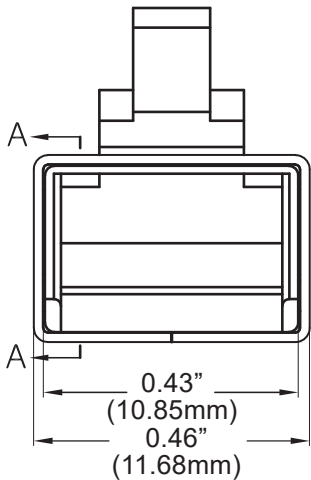


REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

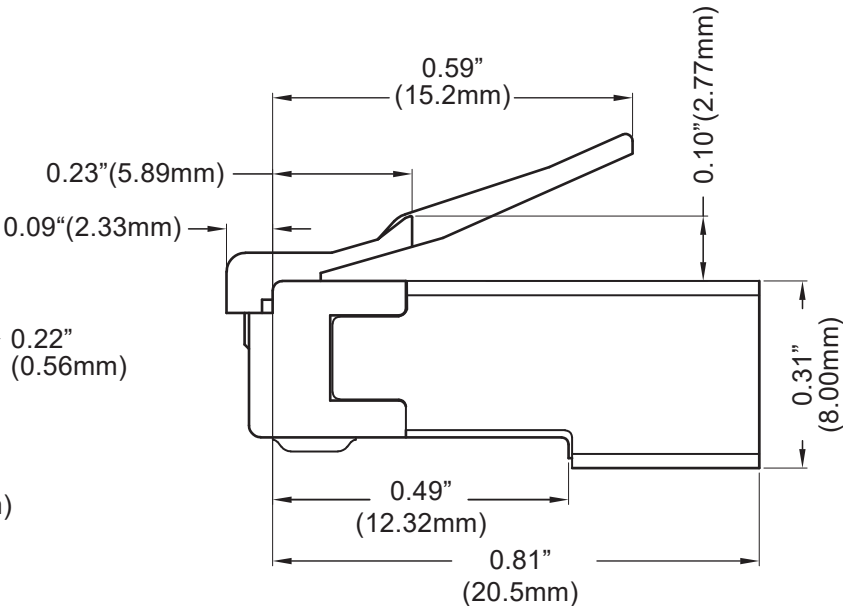

SECTION A-A

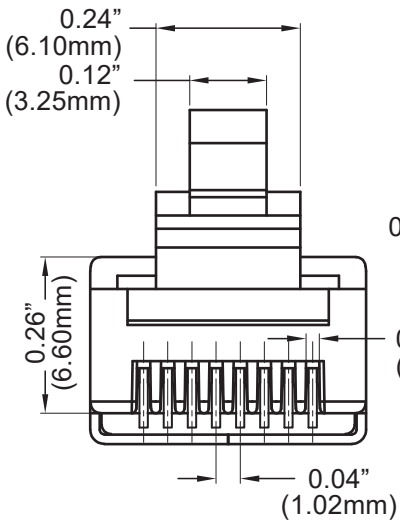

- NOTES:
- 1.Operation Temperature:-40℃~+85℃.
 - 2.Electrial Characteristics:
 - 2.1>Rated Current:125V AC,1.5A@25℃.
 - 2.2>Contact Resistance:20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
 - 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force:30N Max.
 - 3.2>Durability:750 cycles Min.
 - 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.
 - 5.CONDUCTOR:STRANDED&SOLID WIRE,23AWG,24AWG.
(It can be used for the wire OD fromØ1.05~Ø1.10mm.)



DESCRIPTION : Monoprice™ Cat6A RJ45 Shielded Modular Plugs w/Inserts for Round Solid/Stranded Cable, 50u, 3 Prongs, Clear, 25-Pk		
PID # : 34417		
DATE :	UNIT : MM	FILE NAME:

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT