RoHS COMPLIANT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

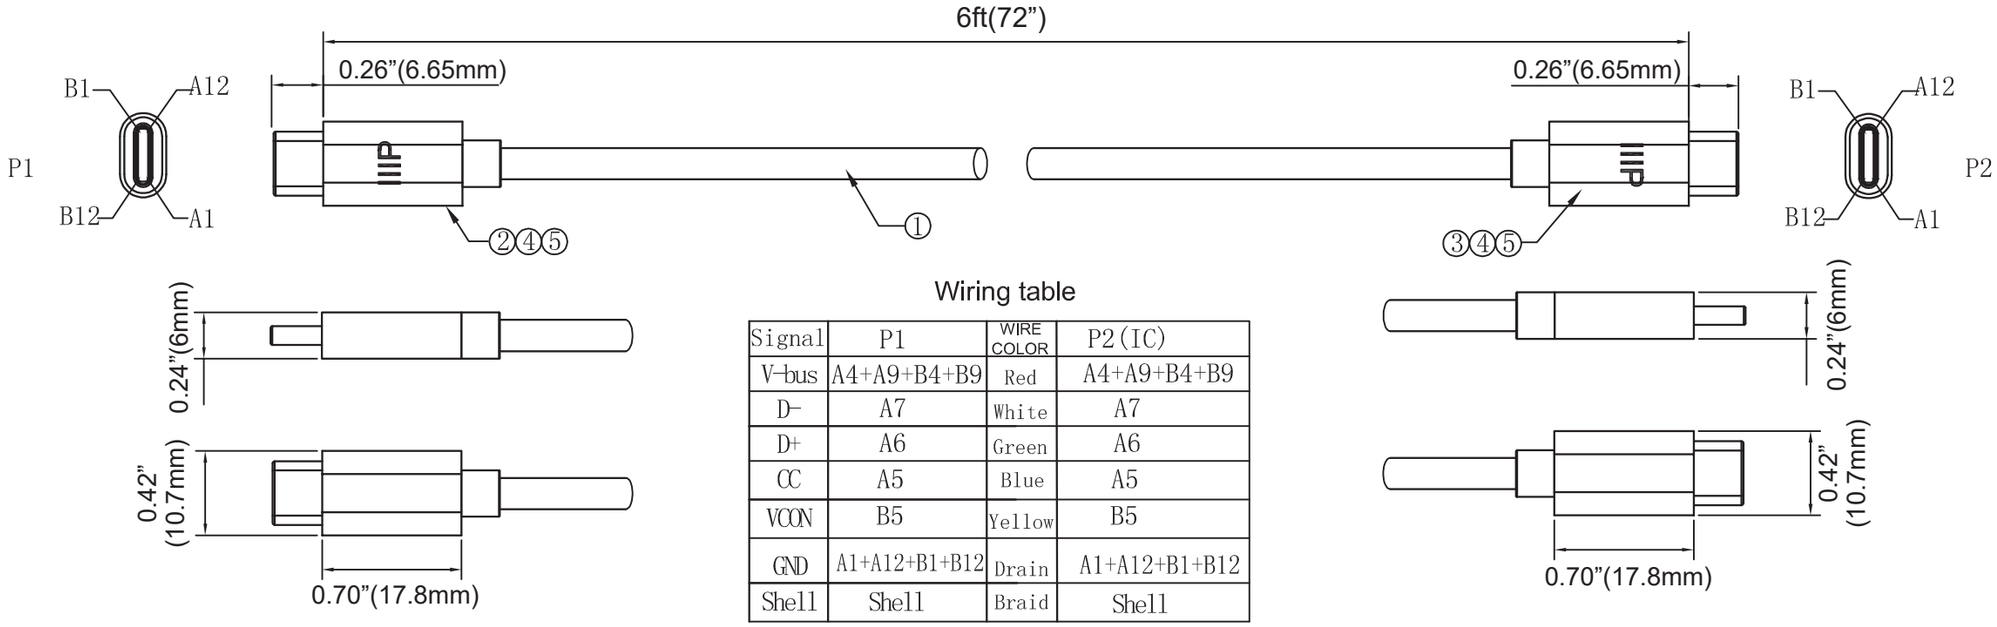

Wiring table

Signal	P1	WIRE COLOR	P2(IC)
V-bus	A4+A9+B4+B9	Red	A4+A9+B4+B9
D-	A7	White	A7
D+	A6	Green	A6
CC	A5	Blue	A5
VCON	B5	Yellow	B5
GND	A1+A12+B1+B12	Drain	A1+A12+B1+B12
Shell	Shell	Braid	Shell

1.Electrical test:
100% conduction test, short circuit, open circuit and dislocation
On resistance: ≤3Ω
Insulation resistance: DC300V,≥10MΩ
2.Bending test：200g,±60°,30times/min, 3000 times no abnormality

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT
5	Plastic shell	Type-C Black ABS shell,RoHS.	2	PCS
4	Mold	85A BLACK TPE mold, RoHS	8	G
3	Connector	TYPE-C Connector(With IC),RoHS	1	PC
2	Connector	TYPE-C Connector,RoHS	1	PC
1	Cable	Ø4.2[30#(11/0.08TS)*4C+21#(53*0.10TS)*2C+D+AL+S],black TPE,RoHS.	1	PC

MONOPRICE

DESCRIPTION :
Monoprice™ Select Charge & Sync USB-C to USB-C Cable USB 2.0 TPE Jacket Up to 5A/100W 6ft Black

PID # : 38921

DATE :

UNIT : MM / IN / FT

FILE NAME: