


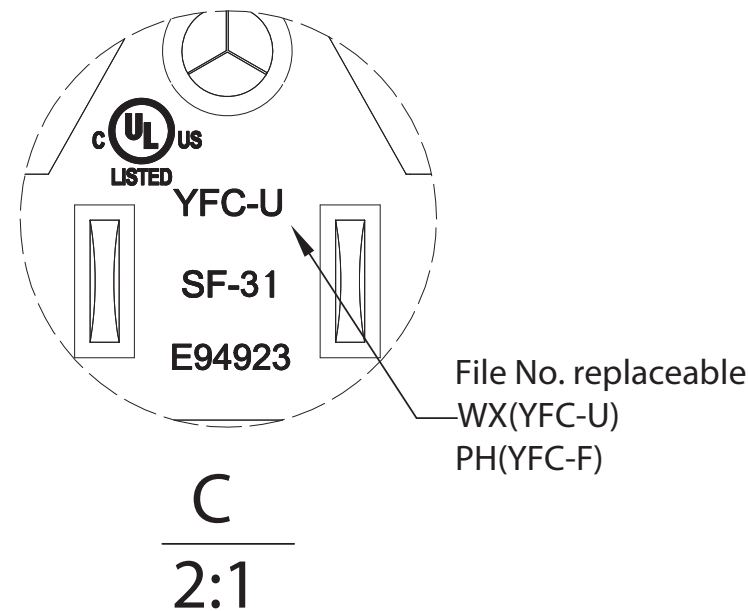


WIRE MARKING WX(NO.442):

(UL) E135710-F5 SJT 3×14AWG 105	°C 300V VW-1
c(UL) SJT 3×2.08 mm ² (14AWG) 105	°C 300V FT2

WIRE MARKING PH(NO.855):

(UL) E135710-F7 SJT 3×14AWG 105	°C 300V VW-1
c(UL) SJT 3×2.08 mm ² (14AWG) 105	°C 300V FT2

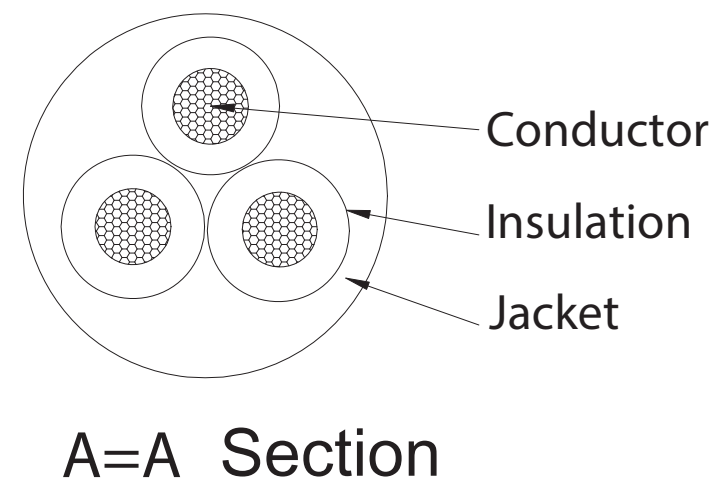

Pinout		
NEMA5-15P SF-31	Wire	IEC 60320 C13 (SF-82S)
E	GREEN	E
N	WHITE	N
L	BLACK	L

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :1500V /1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor resistance	≤ 9.05 Ω/1000m
Voltage Rating	AC 300V

7	UL Label	UL General Use Cord Sets	1	PC
6	Molding	PVC 40P	AR	G
5	Housing	Bracket 5-15P Three Plug Black PBT UL94-V0	1	PC
4	Terminal	C13Terminal Brass Natural color and Bracket, With 18-14AWG. White	1	PC
3	Terminal	5-15P Non-Polar, Current Carrying End, With Riveting 18-14AWG Nickel Plating	2	PCS
2	Terminal	5-15P Terminal Nickel Plated 18-14AWG	1	PC
1	Cable	SJT 14AWGx3C 105 °C Black	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

PID	Color	Length (FT
39786	Black	1FT(12")
39787	Black	2FT(24")
39788	Black	3FT(36")
39789	Black	6FT(72")

 MONOPRICE		
DESCRIPTION : Monoprice™ Power Cord - NEMA 5-15P to IEC 60320 C13, 14AWG, 15A/1875W, 125V, SJT, 3-Prong, Black, 6-Pack		
PID # : 39786, 39787, 39788, 39789		
DATE :	UNIT : MM / IN / FT	FILE NAME: