



REVISION INFORMATION		
Rev.	Rev. Date	Brief Description
V1	2023.06.30	Initial Issue

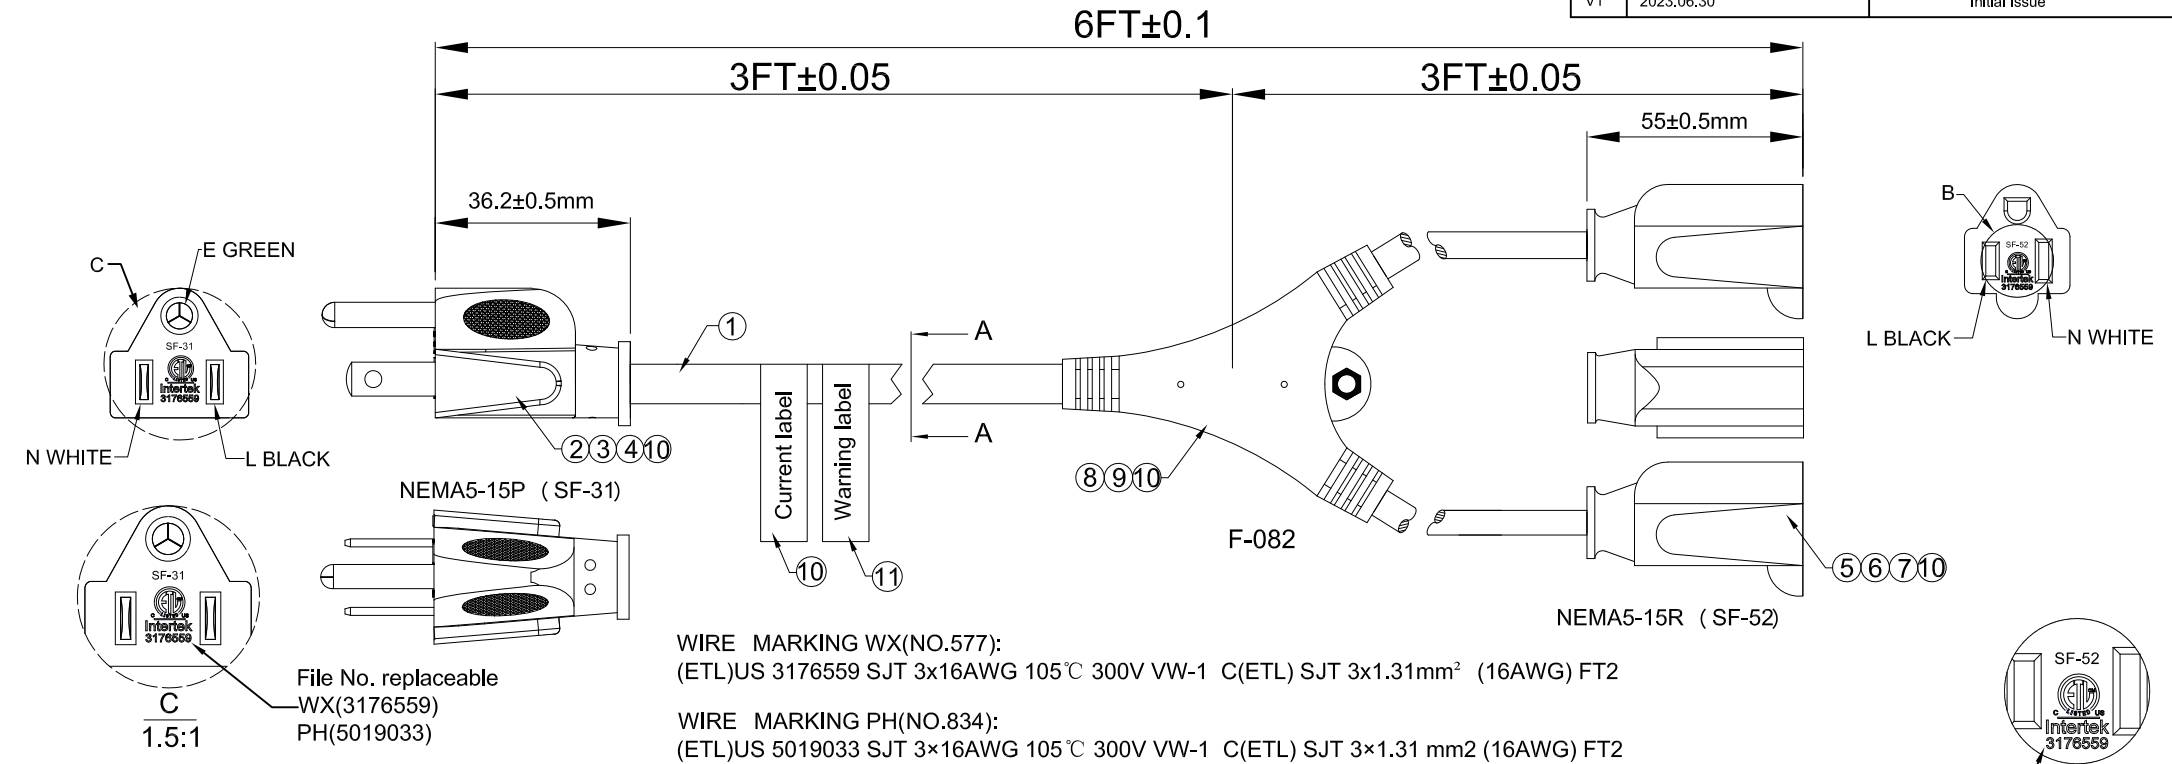

Polarity and Continuity Test	
Dielectric Voltage Withstand Test :1500V /1 Sec	
Electrical Performance (20°C)	
Item	Parameter
Conductor resistance	≤ 14.38Ω/1000m
Voltage Rating	AC 300V



⑫	Warning label	English + Spanish + French Warning Label	1	PC
⑪	Current label	General Use Cordset 13A 125V	1	PC
⑩	Molding	Black 40P PVC	AR	KG
⑨	Housing	Y-Type Upper and Lower inner frame, Materal PC	1	SET
⑧	Terminal	Non-insulated terminal brassy yellow 14-10AWG	3	PCS
⑦	Housing	SF-52 Under and Upper cover of inner frame 5-15R Three plug Black	2	SET
⑥	Terminal	SF-52 5-15R Male Three plug Current-carrying Straight terminal brassy 16AWG	4	PCS
⑤	Terminal	SF-52 5-15R Male Three plug Grounding Straight terminal brassy 16AWG	2	PCS
④	Housing	SF-31 5-15P Three plug Black PC	1	PC
③	Terminal	5-15P Non-Polar, Current Carrying End, With Riveting 18-14AWG Nickel Plating	2	PCS
②	Terminal	5-15P Terminal Nickel Plated 18-14AWG	1	PC
①	Cable	SJT 16AWGx3C 105°C Black	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QT'Y	UNIT

Pinout		
NEMA5-15P (SF-31)	Wire	NEMA5-15R (SF-52)
E	GREEN	E
N	WHITE	N
L	BLACK	L

DESCRIPTION:

Monoprice Power Cord Splitter - NEMA 5-15P to 2x NEMA 5-15R, 16AWG, 13A/1625W, SJT, Black, 6ft

PID # **41088**

DATE: 06.30.2023 UNIT: FT