
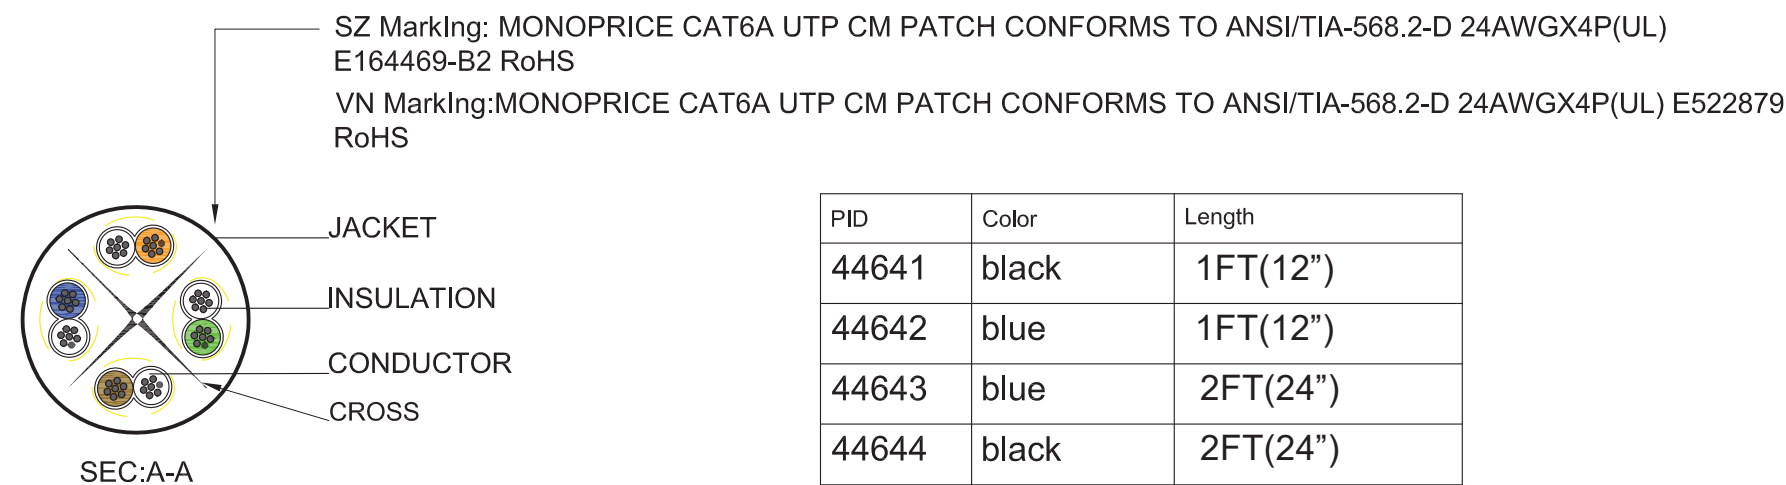


RoHS COMPLIANT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

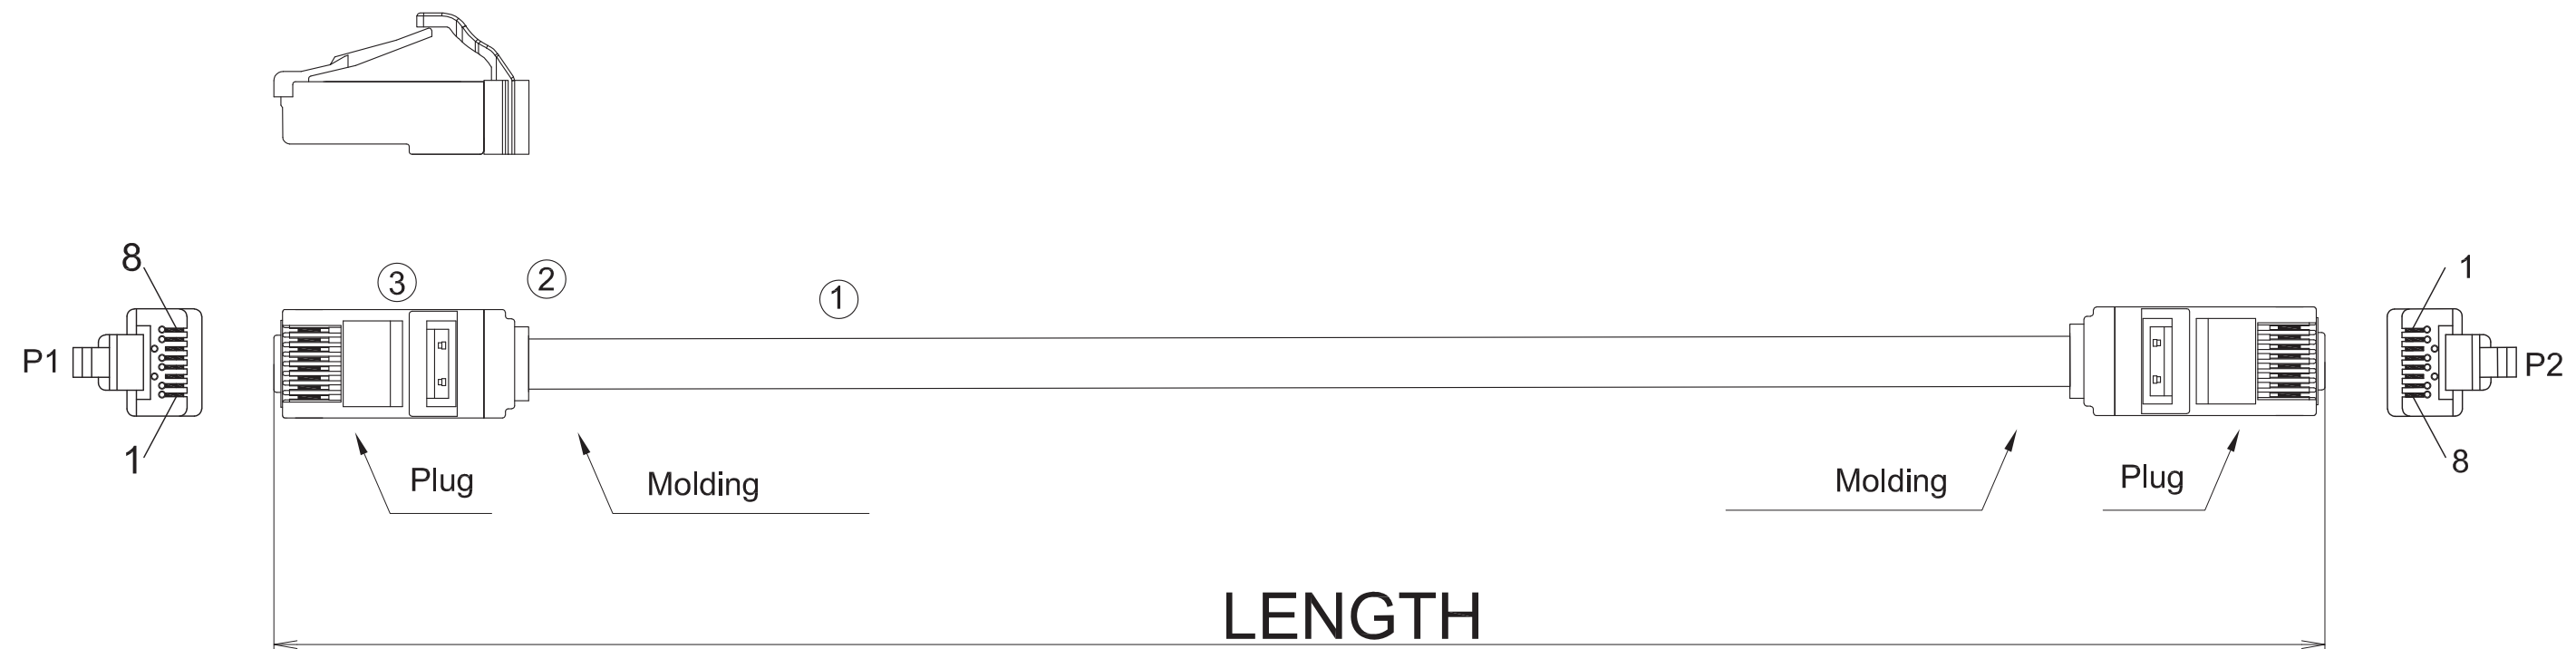

PID	Color	Length
44641	black	1FT(12")
44642	blue	1FT(12")
44643	blue	2FT(24")
44644	black	2FT(24")
44645	black	3FT(36")
44646	blue	3FT(36")
44647	black	5FT(60")
44648	blue	5FT(60")
44649	black	7FT(84")
44650	blue	7FT(84")
44651	black	10FT(120")
44652	blue	10FT(120")
44653	black	15FT(180")
44654	blue	15FT(180")
44655	black	25FT(300")
44656	blue	25FT(300")
44657	black	50FT(600")
44658	blue	50FT(600")

	orange 2 white/orange	green 3 white/green
	blue 1 white/blue	brown 4 white/brown

	PINOUT		
PA/R	P1(T568B)	WIRE	P2(T568B)
2	1	WHT/ORG	1
	2	ORG	2
3	3	WHT/GRN	3
	6	GRN	6
1	4	BLU	4
	5	WHT/BLU	5
4	7	WHT/BRN	7
	8	BRN	8

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.
<2> Fluke Component level (Random Test 5%)
<3> CONDUCTOR RESISTANCE: L≤10M 10ΩMAX
10<L≤20M 15ΩMAX
20<L≤40M 25ΩMAX

Conductor		24AWG (7/0.20±0.008mmBC)*4P
INSULATION		Diameter=0.96±0.05mm
Jacket	TPE	Thickness: Max AVG:0.60 Diameter=6.0±0.20mm

3	RJ45 PLUG	RJ45 PLUG: 8P8C 50U" GOLD PLATED TRANSPARENT PLUG;		
2	MOLDED	TRANSPARENT PVC MOLDED BOOT .		
1	CABLE	CAT6A UTP[24AWG(7/0.20BC±0.008)]* OD:ø6.0±0.2MM CM PVC JACKET.		
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :	Monoprice™ Cat6A Component Level Ethernet Patch Cable - Pure Bare Copper, UTP, 24AWG, 500MHz, Snagless RJ45
---------------	---

PID #: 44641 - 44658

DATE :	UNIT : IN / MM	FILE NAME:
--------	--------------------------	------------