


Rev.	Rev. Date	Brief Description

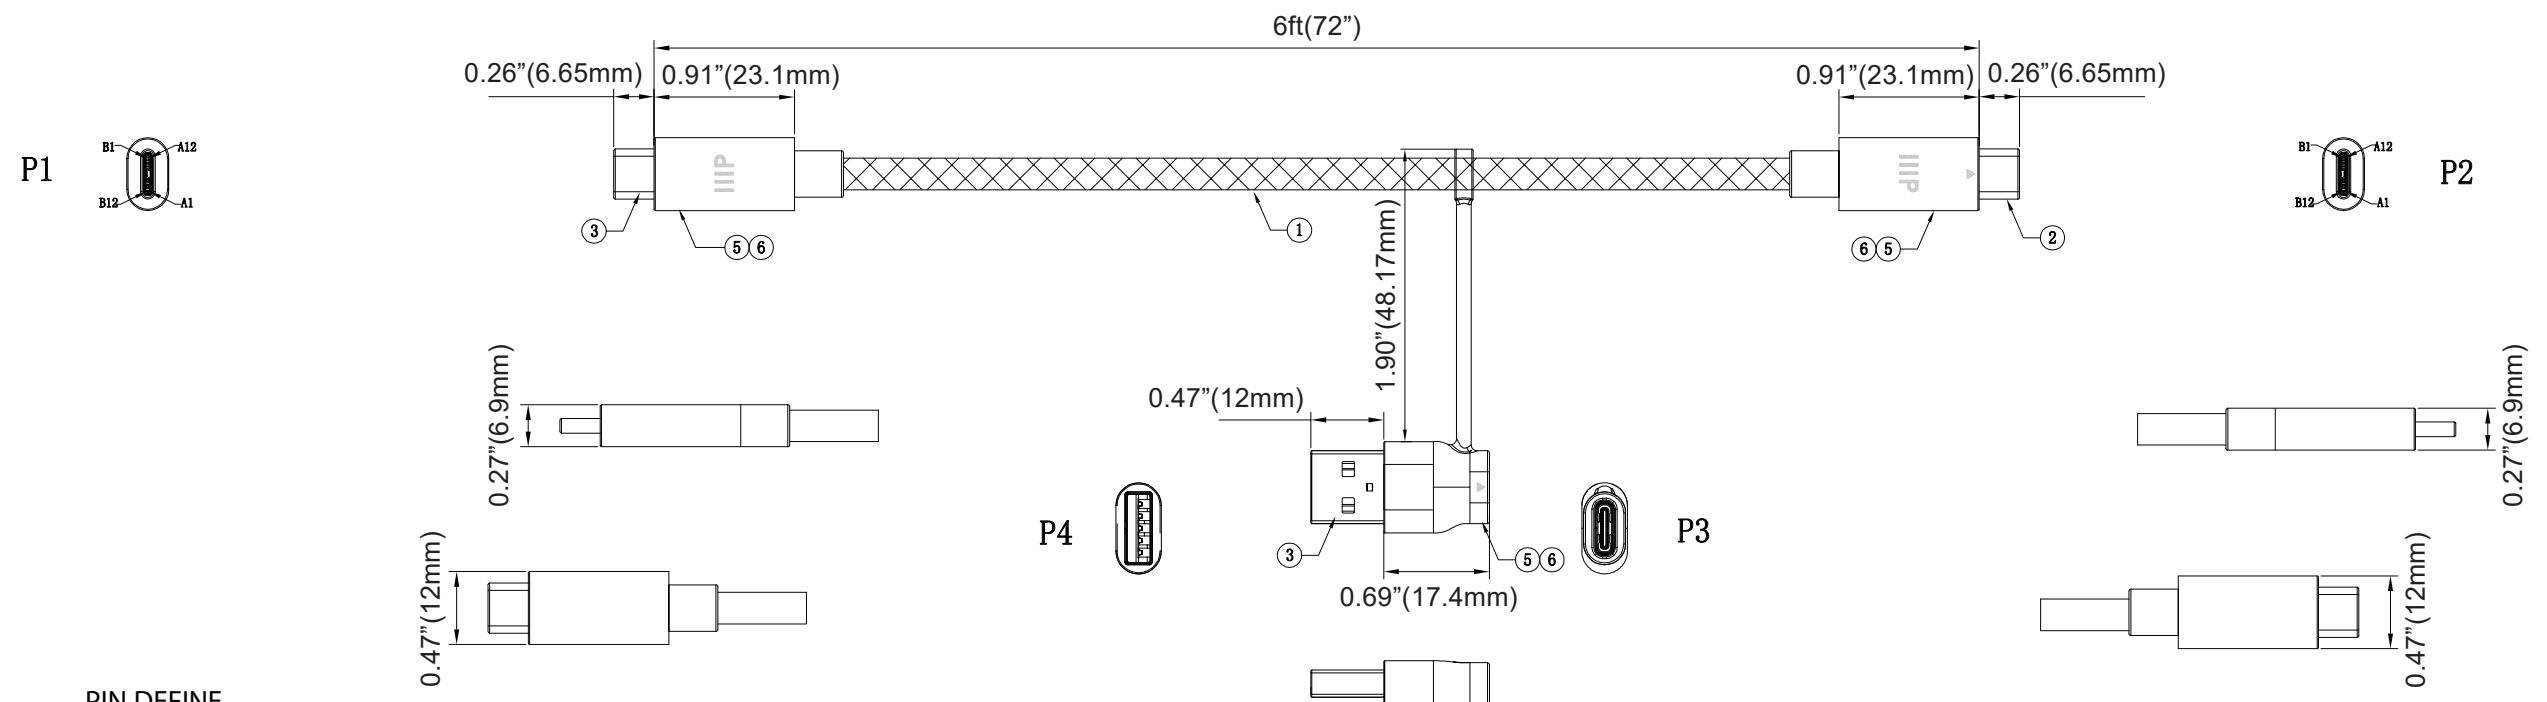

PIN DEFINE

P1	Color	P2
A4 B4 A9 B9	red(Vbus)	A4 B4 A9 B9
A1 B1 A12 B12	Gnd	A1 B1 A12 B12
A5	blue	A5
A7	white(D-)	A7
A6	green(D+)	A6
A2	blue	B11
A3	white	B10
	Gnd	
B11	yellow	A2
B10	white	A3
	purple	A11
B2	white	A10
B3	Gnd	
	orange	B2
A11	white	B3
A10	yellow	B5
B5	red	B8
A8	black	A8
B8	braid	shell
shell		shell

PIN DEFINE

P4 **P3**

1 — (Vbus) — A4 B4 A9 B9
C 10nF — R 56K — A5
(GND) —
4 — (D-) — A1 B1 A12 B12 —
2 — (D+) — A7
3 — A6
5 — A3
6 — A2
7 —
8 — B10
9 — B11
shell — Gnd — shell

6	Outer Molding	TPE plastic	3	PCS
5	Inner Molding	LDPE/natural	3	PCS
4	USB CF TO USB AM	Nickel plated iron shell, gold plated pin, blue rubber core	1	PCS
3	USB-C Plug2	Nickel plated iron shell, gold plated pin, black rubber core No IC	1	PCS
2	USB-C Plug1	Nickel plated iron shell, gold plated pin, black rubber core belt IC	1	PCS
1	Cable	[(20AWG 65/0.10TC+PP/1.3)*1C+(29AWG 1/0.29BC+PE/0.78)*4P+Drain(32AWG 7/0.08TC) *4C+(30AWG7/0.10TC+PE/0.60)*1P+(32AWG 7/0.08TC+250D Polyester+PP/0.55) *4C +D+B]+TPE OD5.1mm+PET fiber Braided hose OD5.6mm	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

Test requirement
100% open 、 short、 mis-wire test.
Insulation resistance: DC300V/10ms,5M ohms (min.).
Contact resistance: 5ohms (max.).
Voltage drop $\leq$ 0.75V
Speed: $\geq$ 1300MB/s (with C to C)
 $\geq$ 350MB/s(with USB A adapter)
resolution: 4K/60Hz (with out USB A adapter)
Maximum power:240W (with C to C)
15W (with USB A adapter)



DESCRIPTION :

Monoprice™ USB4 20Gbps 2-in-1 Cable 240W EPR, 4K60Hz, Braided, Ultra High-Speed, 6ft, Black

PID #: 47673

DATE :

UNIT :

Unit: FT / IN / MM

FILE NAME:
