


Rev.	Rev. Date	Brief Description

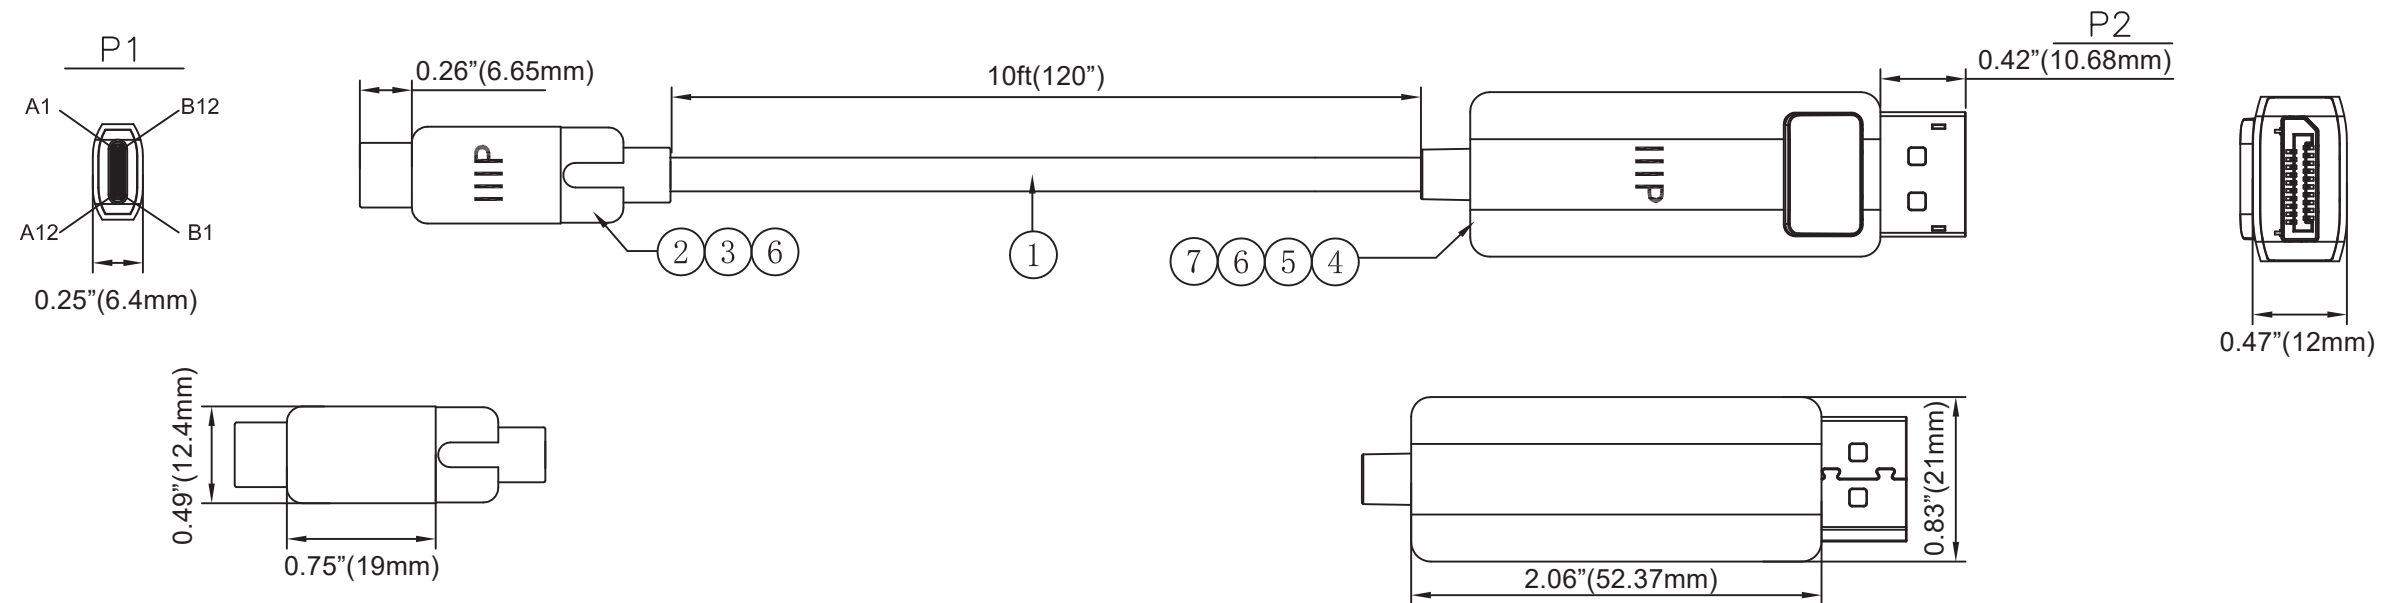


Electrical Test:

1、 100% Test(open,short,miss wire)

FEATURES:

- Supports USB-C input and DisplayPort output
- Supports DisplayPort 1.4/1.2 Alt mode
- Supports DisplayPort resolution up to 7680*4320@60Hz;4K@240Hz
- Bandwidth: 32.4G
- Support 8/10/12 bit color depth
- Pixel format RGB/YCbCr4:4:4/2:2/4:2:0

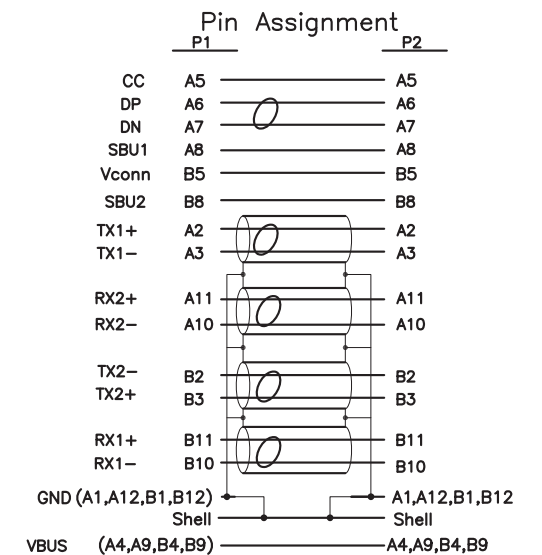

7	CAP	DP DUST CAP	1	PCS
6	MOLDING	TPE~BLACK	VR	G
5	SHELL	UTCDP01 - 3M - HBR3 - AL~SHELL~AL~GRAY	1	PCS
4	PCBA	UTCDP01 - 3M - HBR3 - AL~PCB+SMT	1	PCS
3	SHELL	USB-C SHELL~AL~GRAY	1	PCS
2	CONN	USB-C MALE CONNECTOR~SHELL NI PLATED~PIN GOLD~WITH PCB	1	PCS
1	WIRE	USB 3.2~[32AWG(19/0.05TC)+EAM]*4P+32AWG(19/0.05TC)*2C+24AWG(41/0.08TC)*1C+32AWG(19/0.05TC)*4C+EAB(85%TC)OD:4.8MM~BLACK~TPE~NO MARKING	3.1	M
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :

Monoprice™ USB-C to DisplayPort 1.4 - Active Cable 8K60Hz, Retimer IC, Locking Connector, HDR, 10ft, Black

PID #: 47742

DATE :

UNIT:

Unit: FT / IN / MM

FILE NAME:
