


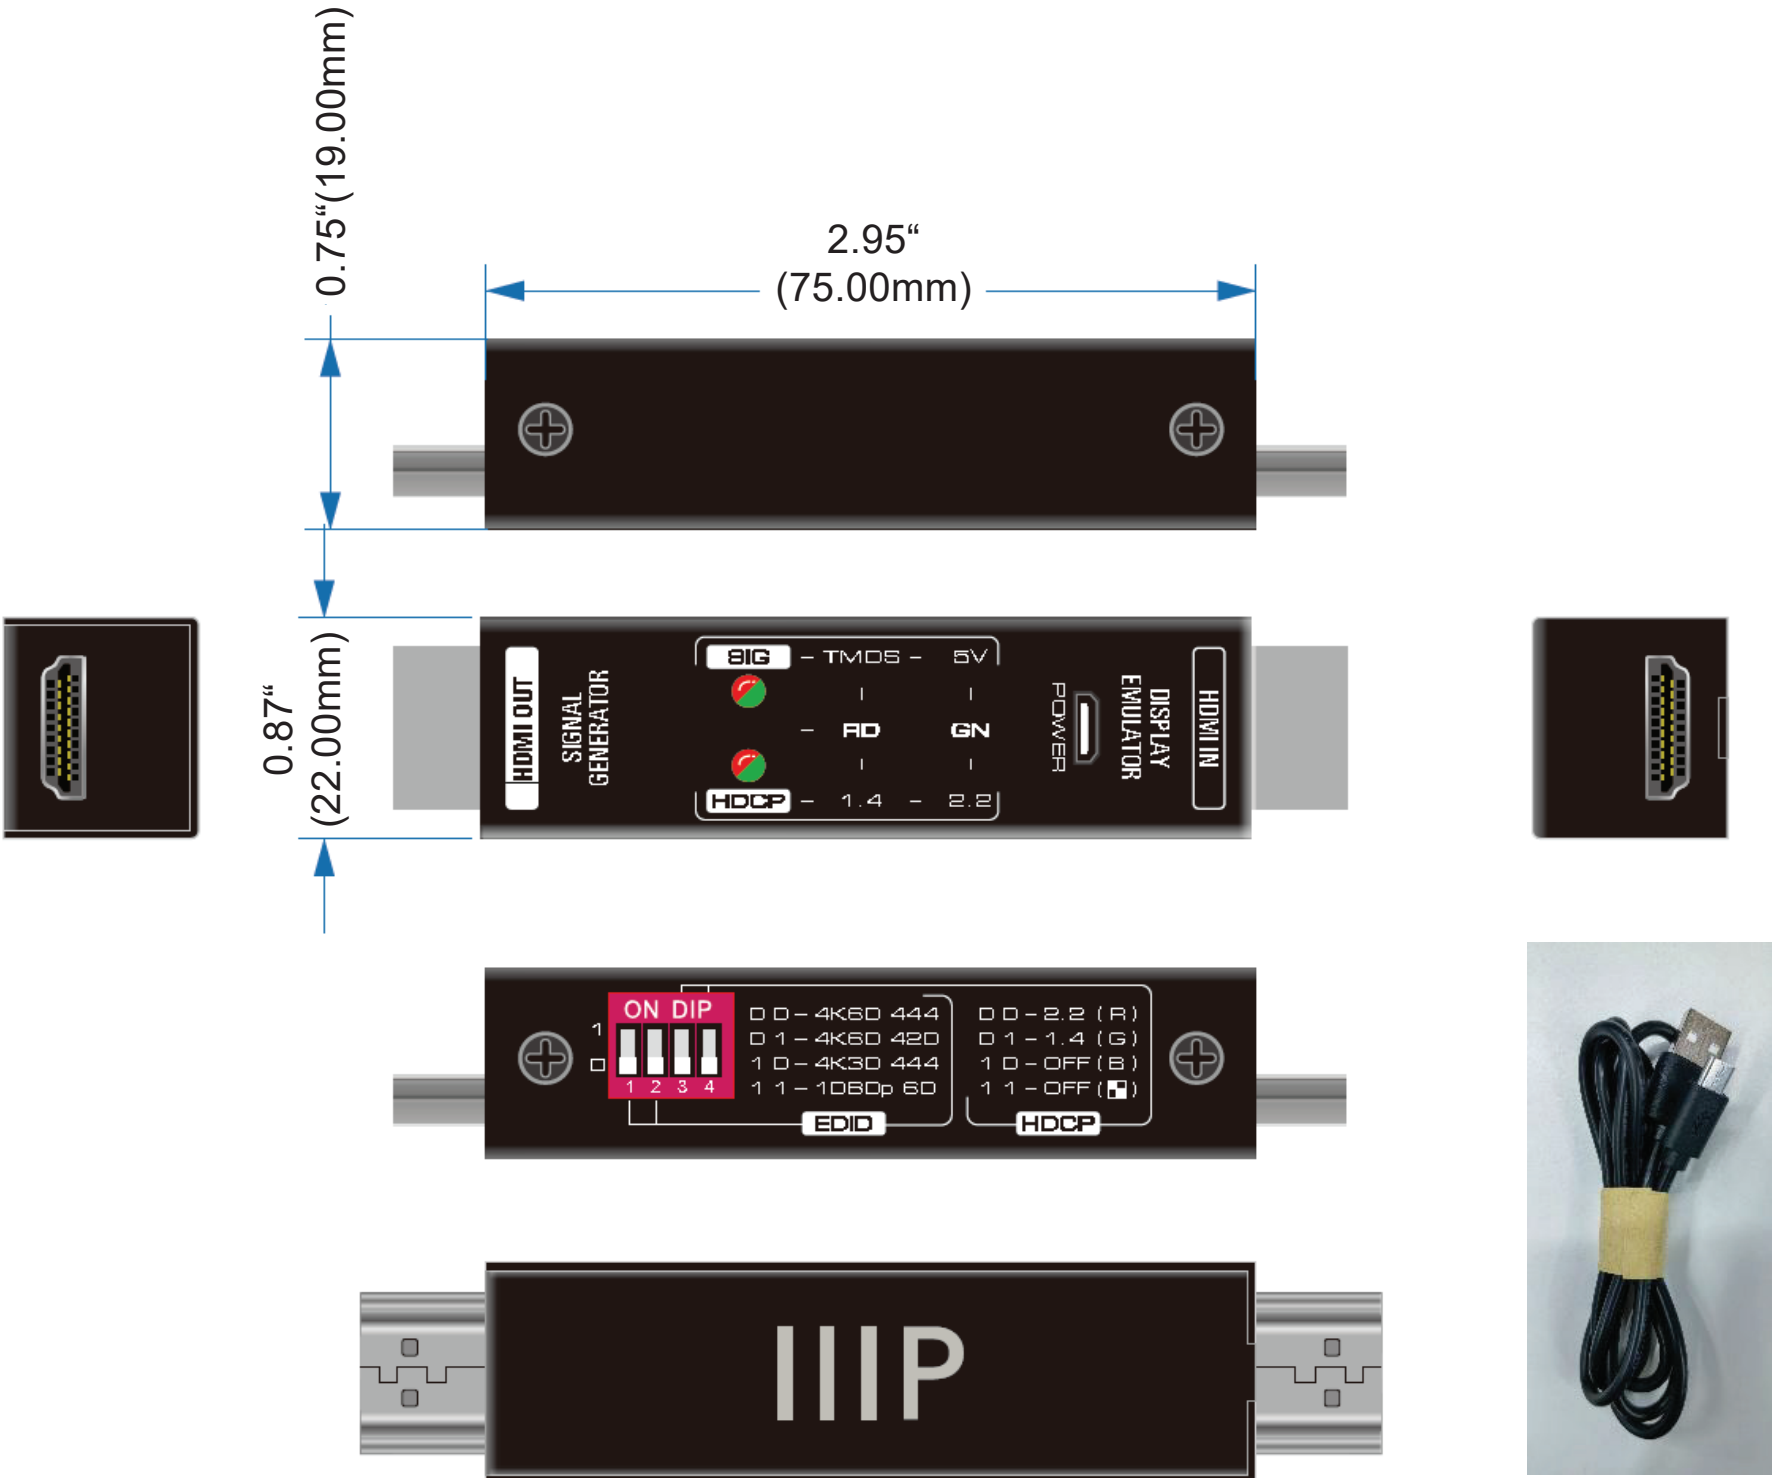

SPECIFICATIONS

Connectors	
Input	1x HDMI IN
Input Connector	1x HDMI
Output	1x HDMI OUT
Output Connector	1x HDMI
Power Connector	1x Micro-USB
Control	1x 4-Pin DIP Switch
General	
Input Video Resolution	Up to 4k @ 60Hz 4:4:4 8-Bit
Output Video Resolution	4K @ 60Hz 4:4:4 4K @ 60Hz 4:2:4 4K @ 30Hz 4:4:4 1080p @ 60Hz
HDMI Version	HDMI 2.0
HDCP Content	HDCP 22,1.4
Power Supply	5 VDC, 1A(USB Power Cord)
Power Consumption	2 W (MAX)
Operating Temperature	23 °F - 131 °F / -5°C - 55 °C
Storage Temperature	-13 °F - 158 °F / -25°C - 70 °C
Relative Humidity	10-90%, Non-Condensing
Dimensions (W x H x D)	3.0" x 0.9" x 0.7" (75x22x19 mm)
Net weight	2.3 oz (65 g)

4	User Manual	user manual of PID48143	1	PCS
3	bag	Brown Cloth Bag	1	PCS
2	Cable	USB Power Cord	1	PCS
1	Device	HDMI Signal Generator and Display Analyzer	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION :
Monoprice™ HDMI Signal Generator and Display Analyzer

PID # :
48143

DATE :

UNIT :

FILE NAME: