


Rev.	Rev. Date	Brief Description



Test requirement
100% open 、 short、 mis-wire test.
Insulation resistance: DC300V/10ms,5M ohms (min.).
Contact resistance: 5ohms (max.).
Voltage drop $\leq 0.75V$
Speed: $\geq 1300MB/s$
resolution: 4K/60Hz
Maximum power:240W

5	Outer Molding	TPE plastic	2	PCS
4	Inner Molding	LDPE/natural	2	PCS
3	Type C Plug2	Nickel plated iron shell, gold plated pin, black rubber core No IC	1	PCS
2	Type C Plug1	Nickel plated iron shell, gold plated pin, black rubber core belt IC	1	PCS
1	Cable	[(20AWG 65/0.10TC+PP/1.3)*1C+(29AWG 1/0.29BC+PE/0.78)*4P+Drain(32AWG 7/0.08TC)*4C+(30AWG 7/0.10TC+PE/0.60)*1P+(32AWG 7/0.08TC+250D Polyester+PP/0.55)*4C +D+B]+TPE OD5.1mm+PET fiber Braided hose OD5.6mm	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

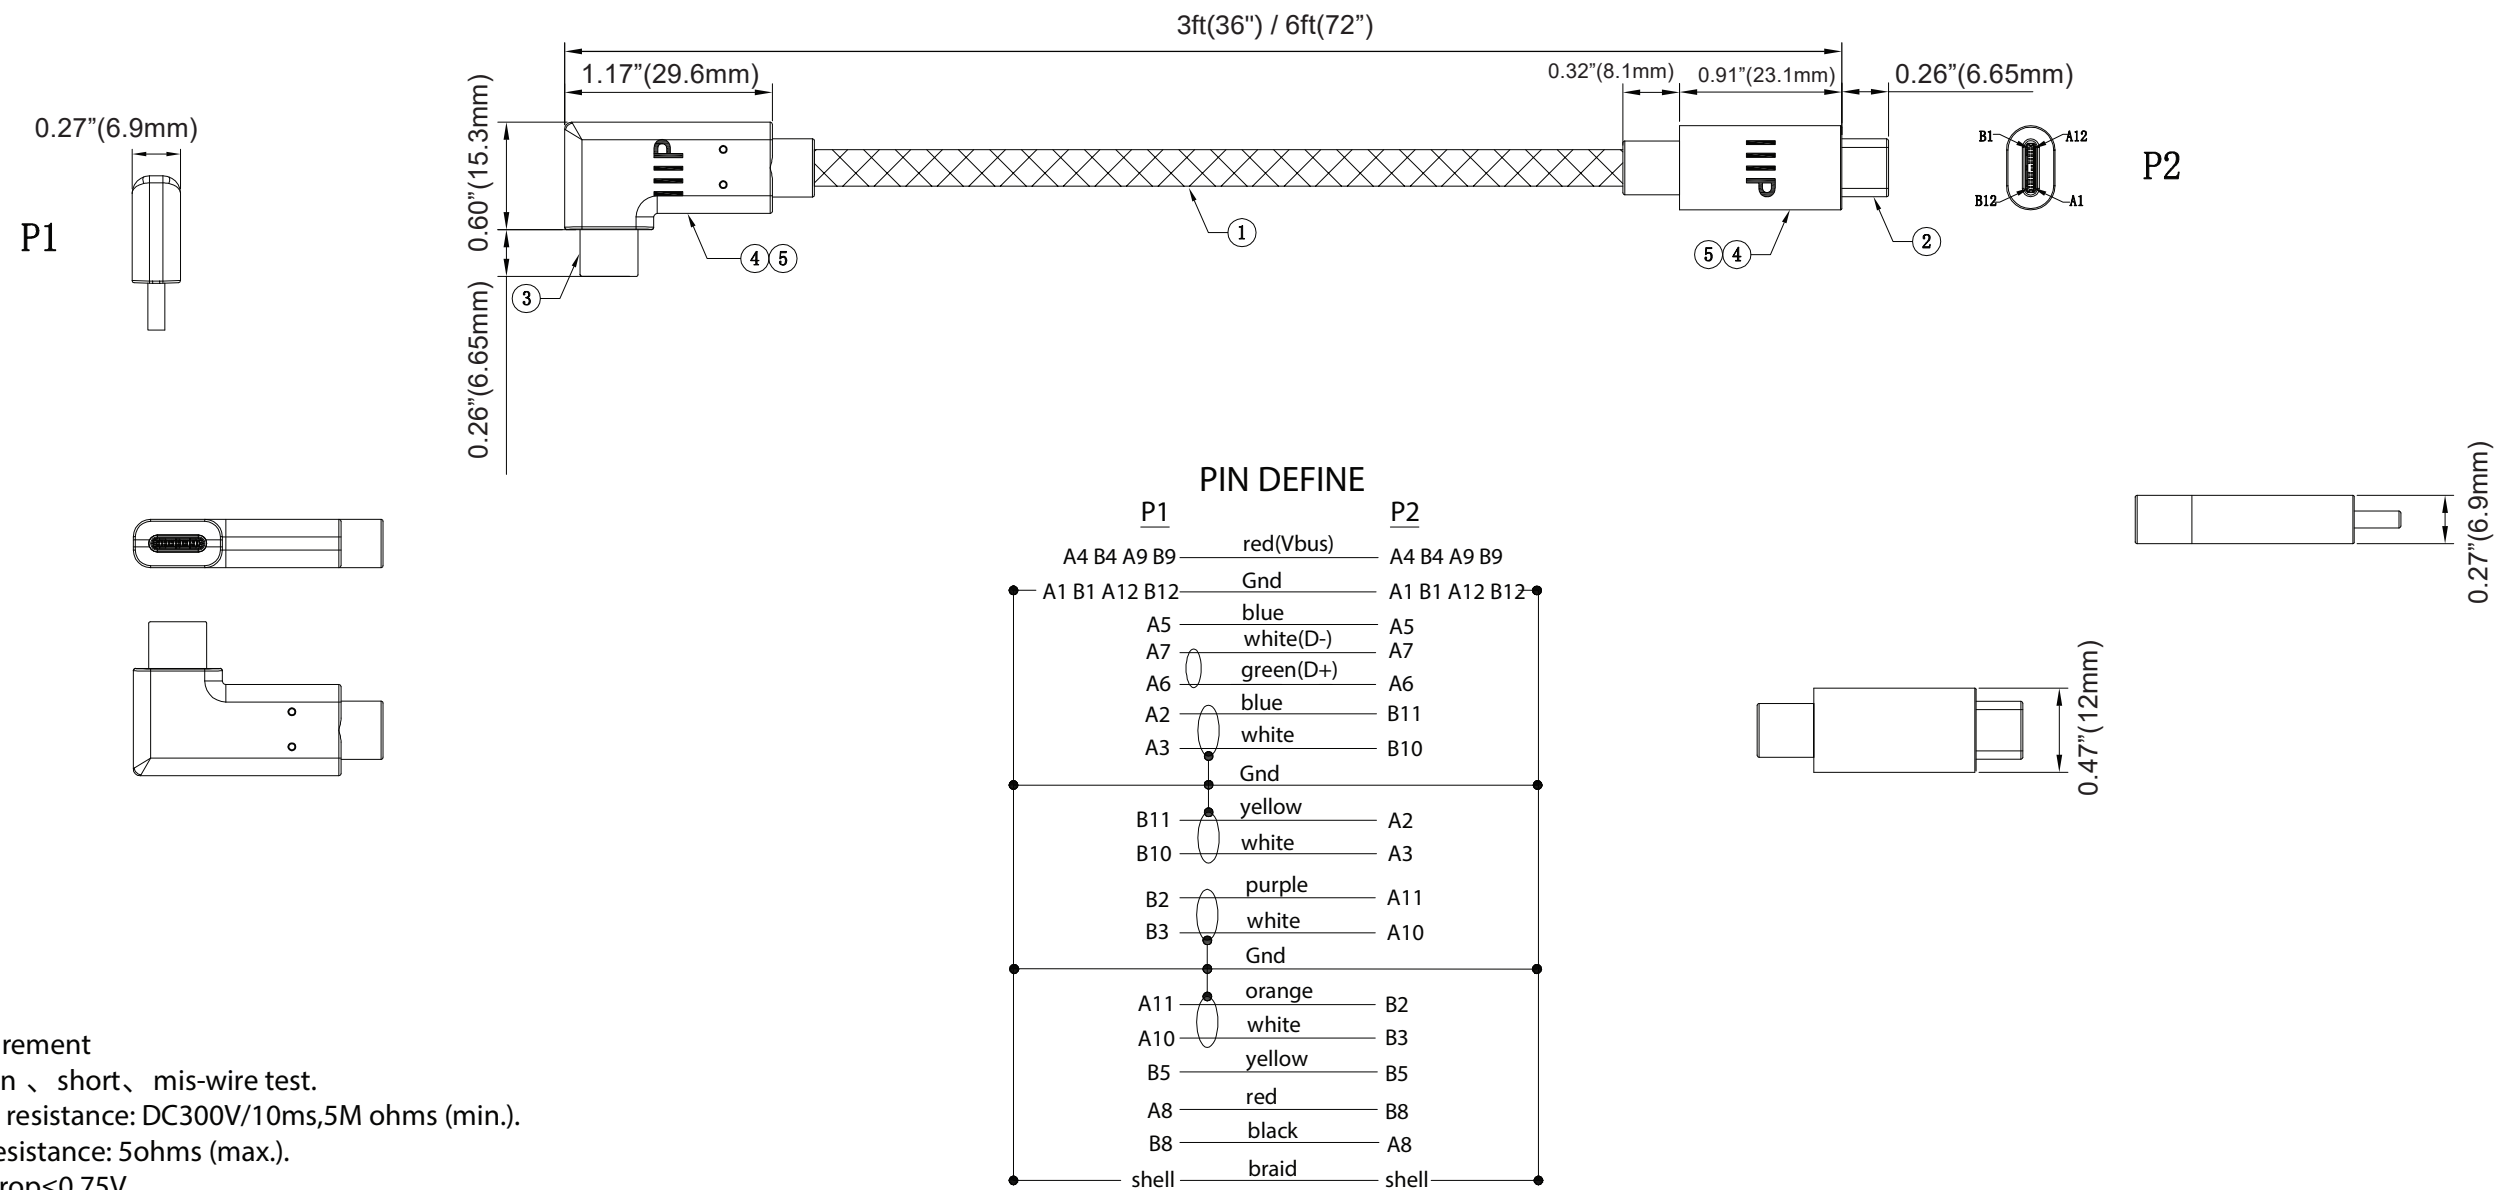

DESCRIPTION :

Monoprice™ USB4 20Gbps Cable 240W EPR, 4K60Hz, Braided, Ultra High-Speed, Right-Angle Connector, 3ft / 6ft, Black

PID #: 48856 / 48857

DATE :

UNIT:

Unit: FT / IN / MM

FILE NAME:
