


Rev.	Rev. Date	Brief Description

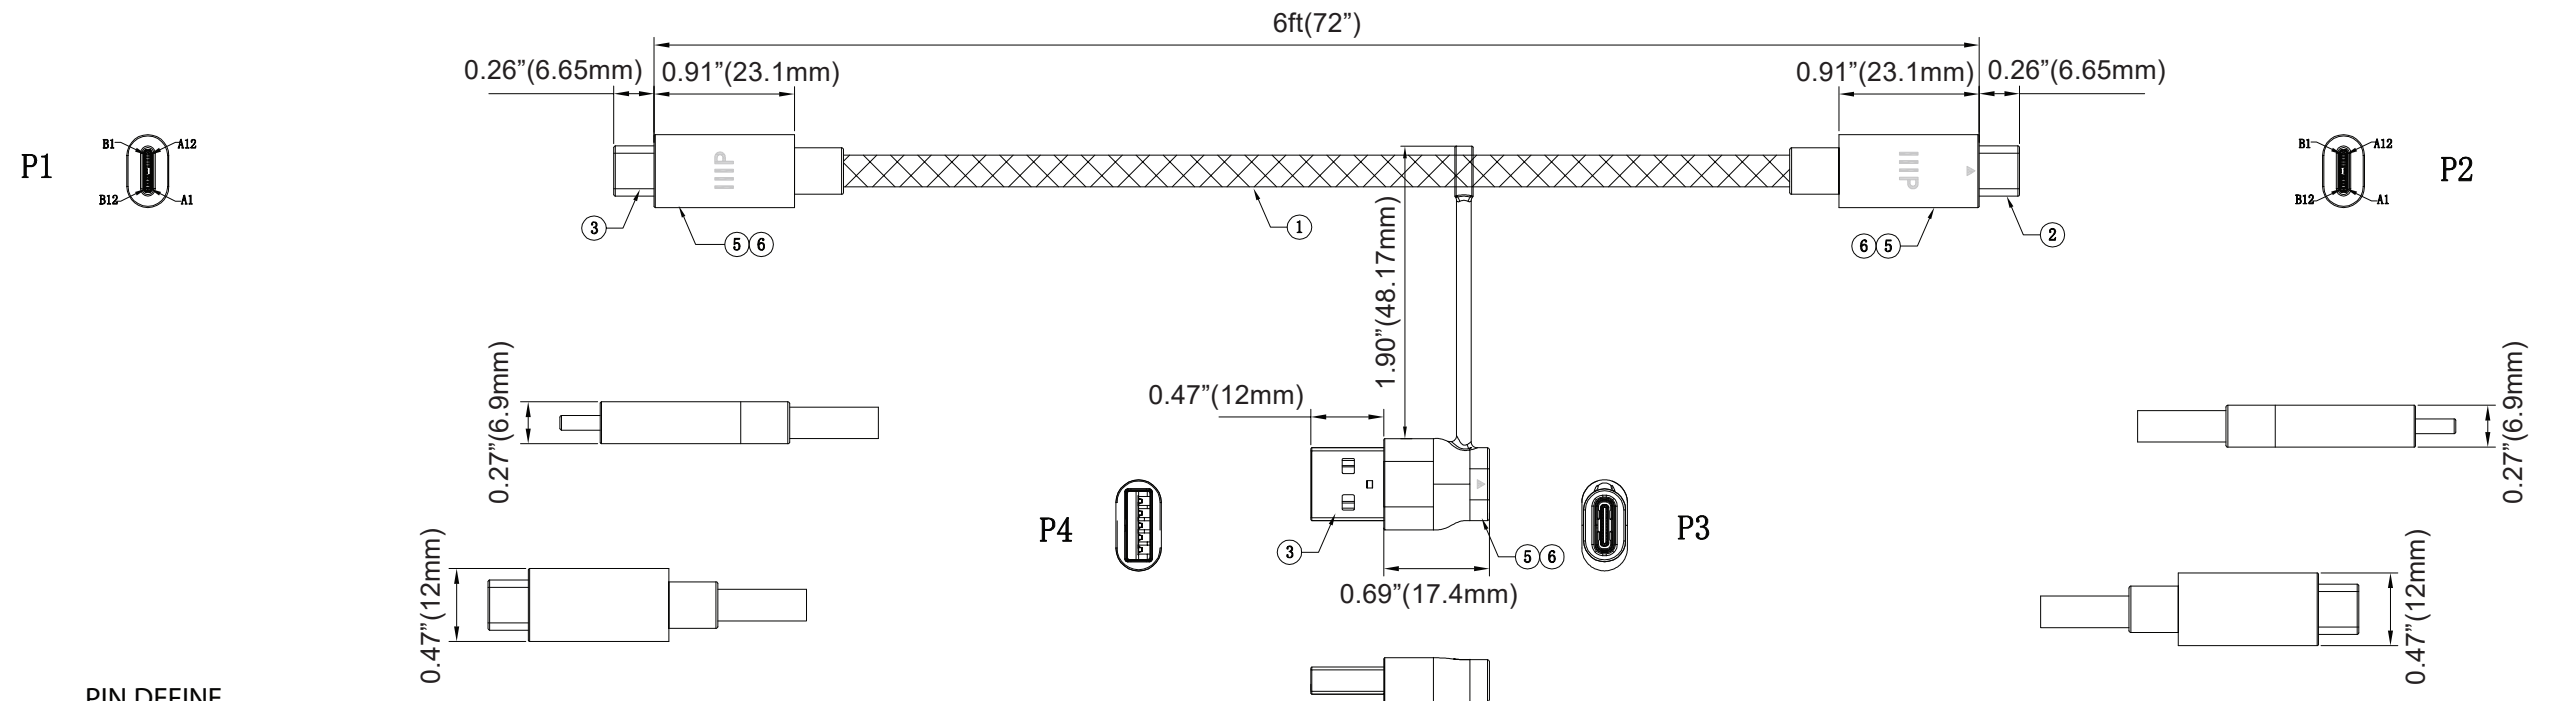

PIN DEFINE

The diagram illustrates the wiring for a 15-pin D-sub connector. The pins are arranged in two rows: P1 (top) and P2 (bottom). The wiring is as follows:

P1 Pin	Color / Label	P2 Pin	Color / Label
1	red(Vbus)	1	red(Vbus)
2	blue	2	blue
3	white(D-)	3	white(D-)
4	green(D+)	4	green(D+)
5	blue	5	blue
6	white	6	white
7	yellow	7	yellow
8	white	8	white
9	purple	9	purple
10	white	10	white
11	orange	11	orange
12	white	12	white
13	yellow	13	yellow
14	red	14	red
15	black	15	black
16	braid	16	braid

The ground pins (P1 Pin 8, P2 Pin 8, P1 Pin 16, P2 Pin 16) are connected to a common ground rail.

PIN DEFINE

P4 **P3**

1 (Vbus) A4 B4 A9 B9
C 10nF R 56K A5
(GND)
4 (D-) A1 B1 A12 B12
2 (D-) A7
3 (D+) A6
5 A3
6 A2
7
8 B10
9 B11
shell Gnd shell

6	Outer Molding	TPE plastic	3	PCS
5	Inner Molding	LDPE/natural	3	PCS
4	USB CF TO USB AM	Nickel plated iron shell, gold plated pin, blue rubber core	1	PCS
3	USB-C Plug2	Nickel plated iron shell, gold plated pin, black rubber core No IC	1	PCS
2	USB-C Plug1	Nickel plated iron shell, gold plated pin, black rubber core belt IC	1	PCS
1	Cable	[(20AWG 65/0.10TC+PP/1.3)*1C+(29AWG 1/0.29BC+PE/0.78)*4P+Drain(32AWG 7/0.08TC) *4C+(30AWG7/0.10TC+PE/0.60)*1P+(32AWG 7/0.08TC+250D Polyester+PP/0.55) *4C +D+B]+TPE OD5.1mm+PET fiber Braided hose OD5.6mm	1	PCS
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :

Monoprice™ USB4 20Gbps 2-in-1 Cable 240W EPR, 4K60Hz, Braided, Ultra High-Speed, 6ft, Black, 2-Pack

PID #: 48863

DATE :

UNIT :

Unit: FT / IN / MM

FILE NAME: