


MARKING: FLAT CABLE CAT8 U/FTP 32AWGX4P PATCH CONFORM TO ANSI/TIA-568.2-D & ISO/IEC 11801 ED.1.0 CM(UL) E522879 ▲ RoHS COMPLIANCE

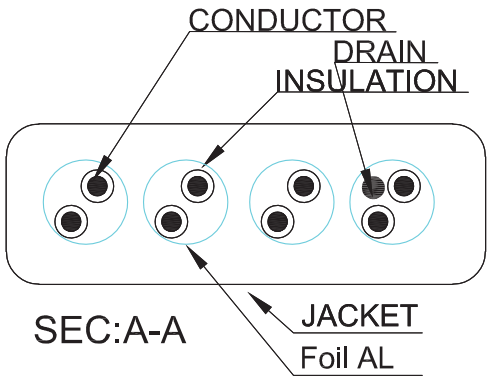

orange 2 white/orange	green 3 white/green
blue 1 white/blue	brown 4 white/brown

PA/R	PINOUT		
	P1(T568B)	WIRE	P2(T568B)
2	1	WHT	1
	2	ORG	2
3	3	WHT	3
	6	GRN	6
1	4	BLU	4
	5	WHT	5
4	7	WHT	7
	8	BRN	8
S	S	BRAID	S

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.
<2> FLUKE CHANNEL LEVEL 1DB↑
<3> CONDUCTOR RESISTANCE: $L \leq 10M$ 10ΩMAX
10< $L \leq 20M$ 15ΩMAX
20< $L \leq 40M$ 25ΩMAX

Conductor		Bare Copper 32AWG (7/0.08±0.008mmBC)*4P				
INSULATION		Thickness:MIN at any point:0.2mm MAX AVG:0.3mm Diameter:0.60±0.06mm				
Jacket	PVC	Thickness: MIN at any point:0.50mm MAX AVG:0.60mm Diameter:1.9±0.15*6.0±0.20MM				
3	RJ45 PLUG		RJ45 PLUG: 8P8C 50U” GOLD PLATED TWO-PIECE SHIELDED NICKEL SHORT BODY PLUG			
2	Molded		PVC MOLDED BOOT .			
1	Cable		CAT.8 U/FTP 3P/32AWG(7/0.08±0.008BC)+[1P/32AWG(7/0.08±0.008BC)+DRAIN(7/0.10mm TC)] OD=1.9±0.15*6.0±0.20mm PVC JACKET			
NO.	PART NAME		SPECIFICATION DESCRIPTION		QTY	UNIT

 **MONOPRICE**

DESCRIPTION :
Monoprice™ Cat8 Ethernet Patch Cable - Slim, Flat, U/FTP, 32AWG, Molded Boot

PID # : **49208 - 49240**

DATE :	UNIT : FT / IN / MM	FILE NAME:
--------	----------------------------	------------

