


REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

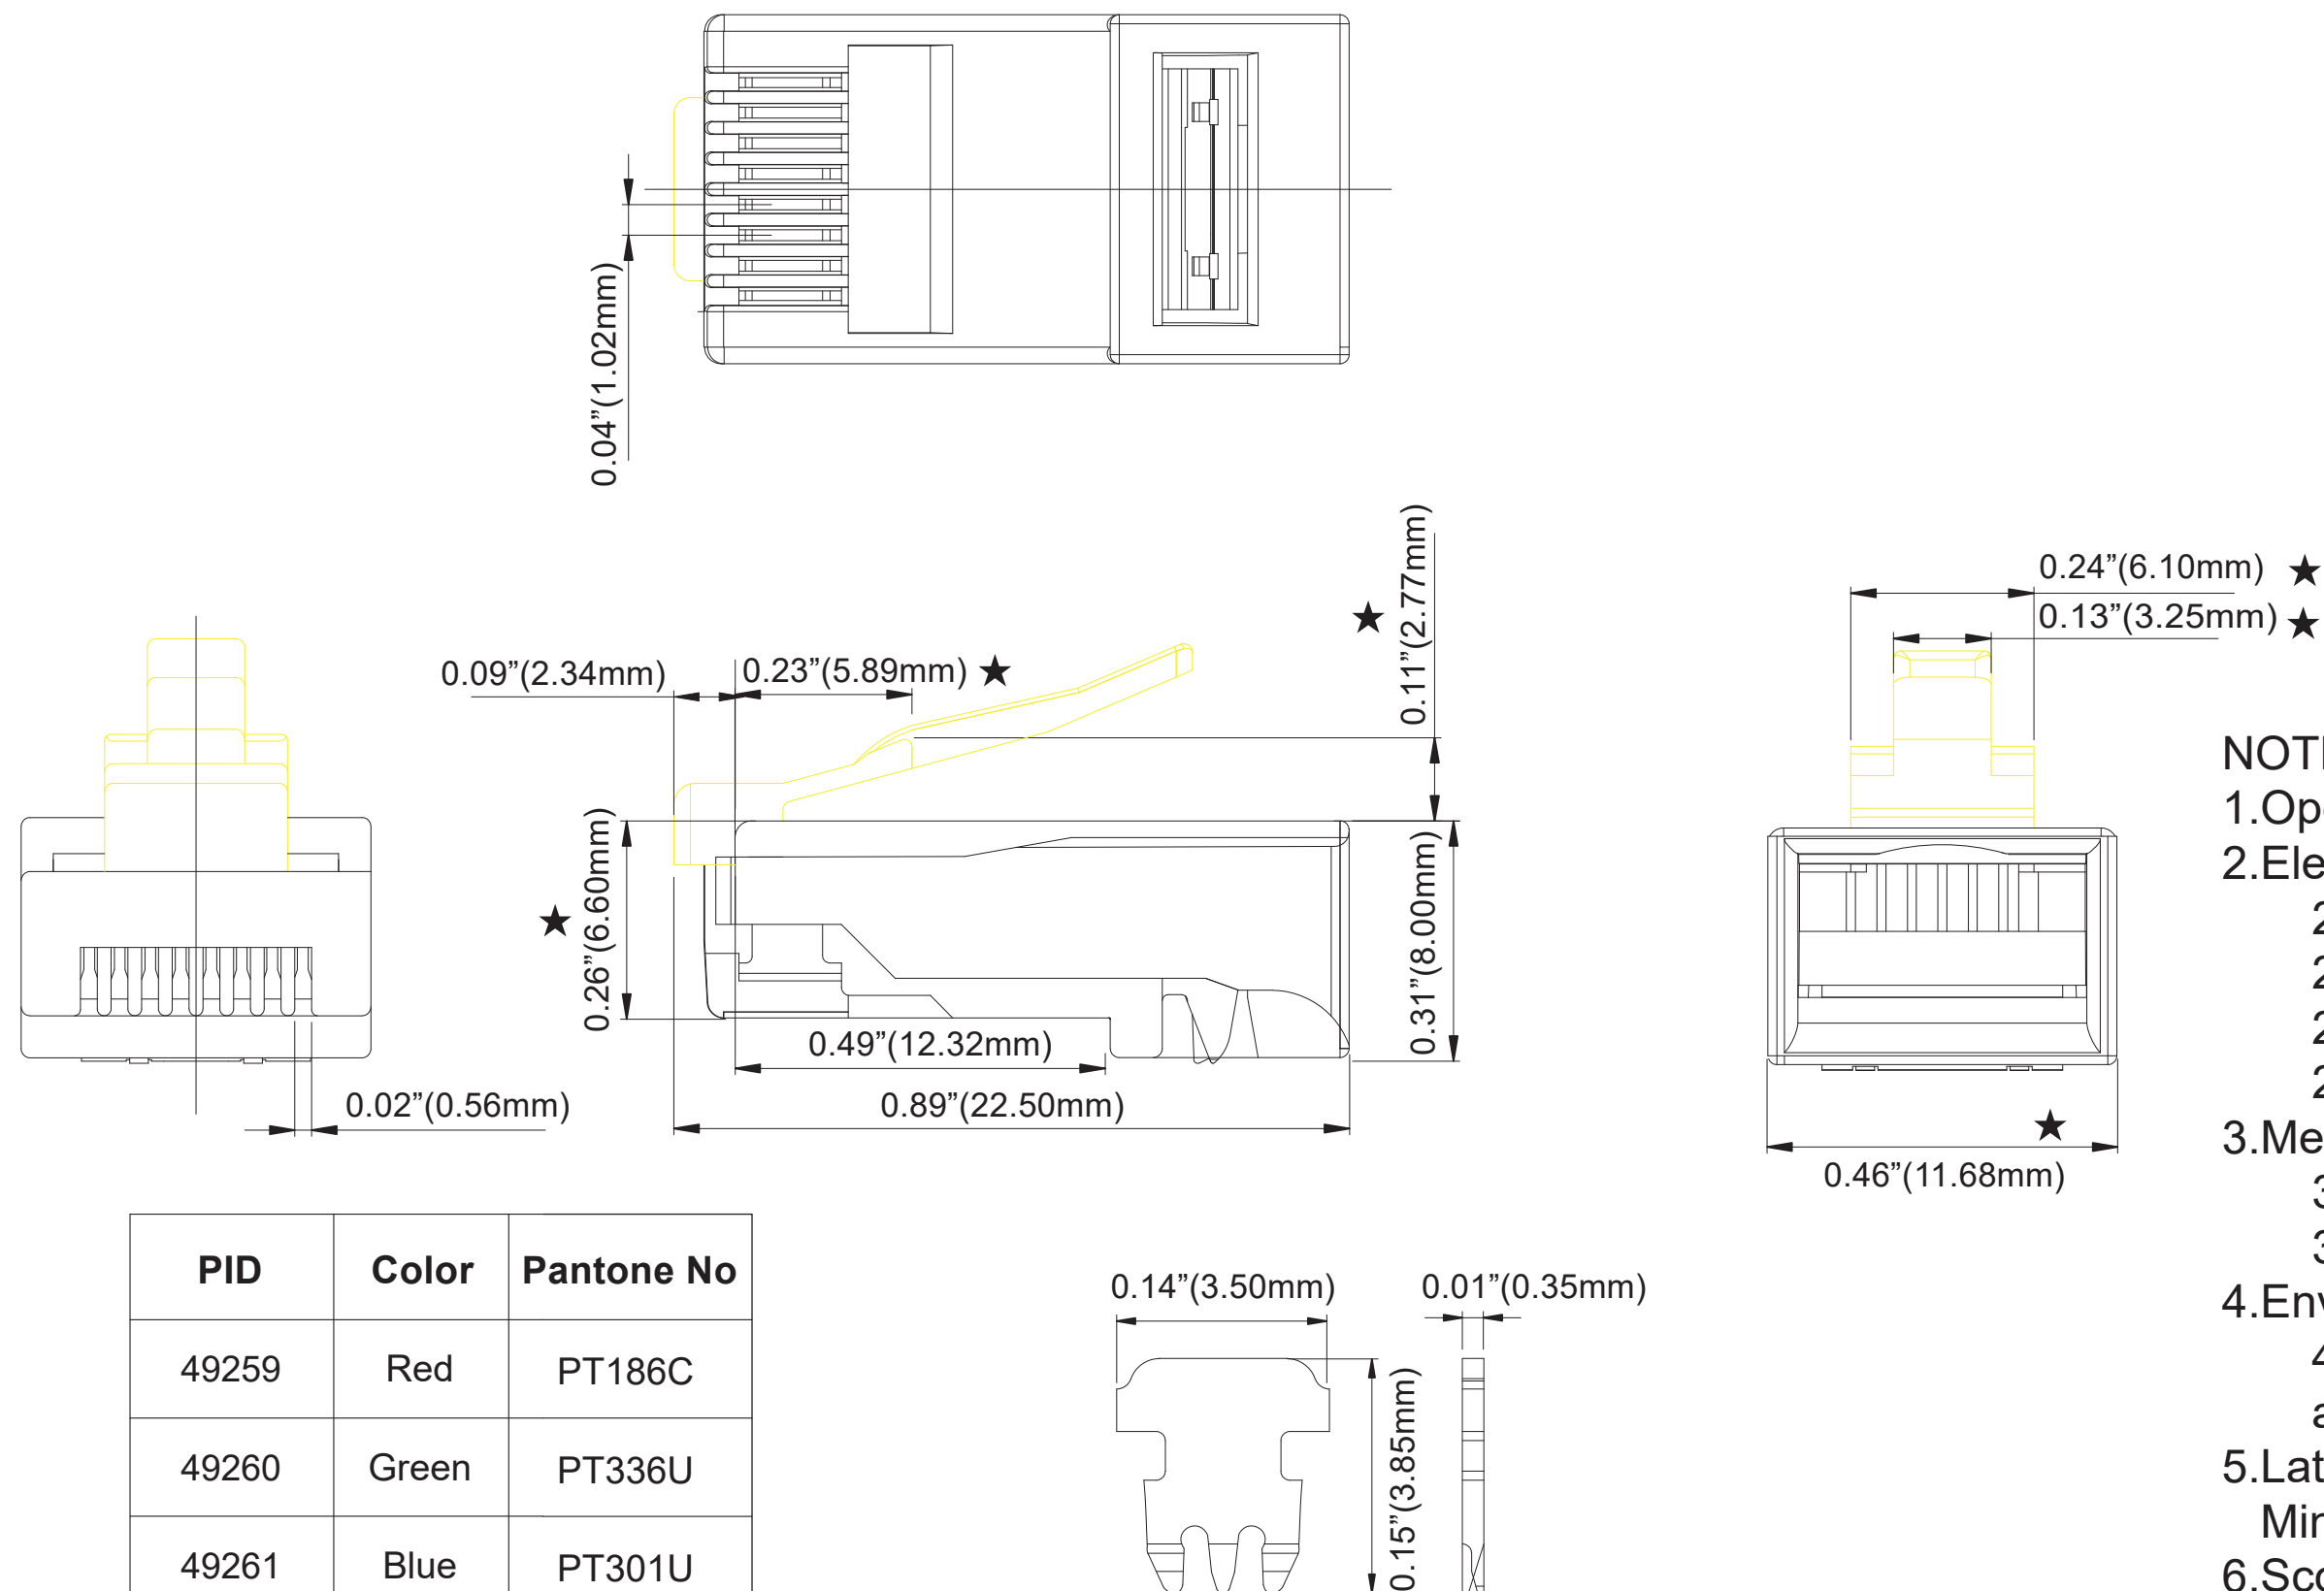

PID	Color	Pantone No
49259	Red	PT186C
49260	Green	PT336U
49261	Blue	PT301U
49262	Yellow	PT143C
49263	Gray	PT7534C
49264	White	RAL9003
49372	Orange	PT7578C
49373	Purple	PT2756C

NOTES:

- 1.Operation Temperature:-40°C~+85°C.
- 2.Electrical Characteristics:
 - 2.1>Rated Current : 125V AC,1.5A@25°C.
 - 2.2>Contact Resistance : 20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown
- 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force : 30N Max.
 - 3.2>Durability:750 cycles Min.
- 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS and REACH etc.
- 5.Latch Material: Nylon
Min. 5000 bending cycles without break
- 6.Scope of Application
DuraBend RJ45 connectors: standard type for standard cables(23AWG~26AWG).
- 7.50um Gold-plated Contacts



DESCRIPTION :

Monoprice™ Cat6A Unshielded RJ45 Connectors with Break-Resistant Latch & Strain Relief Boot - Gold-Plated, for 23-26AWG UTP Cable, 50-Sets

PID # :

49259 - 49264, 49372, 49373

DATE :


UNIT :

: MM / IN

FILE NAME:

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

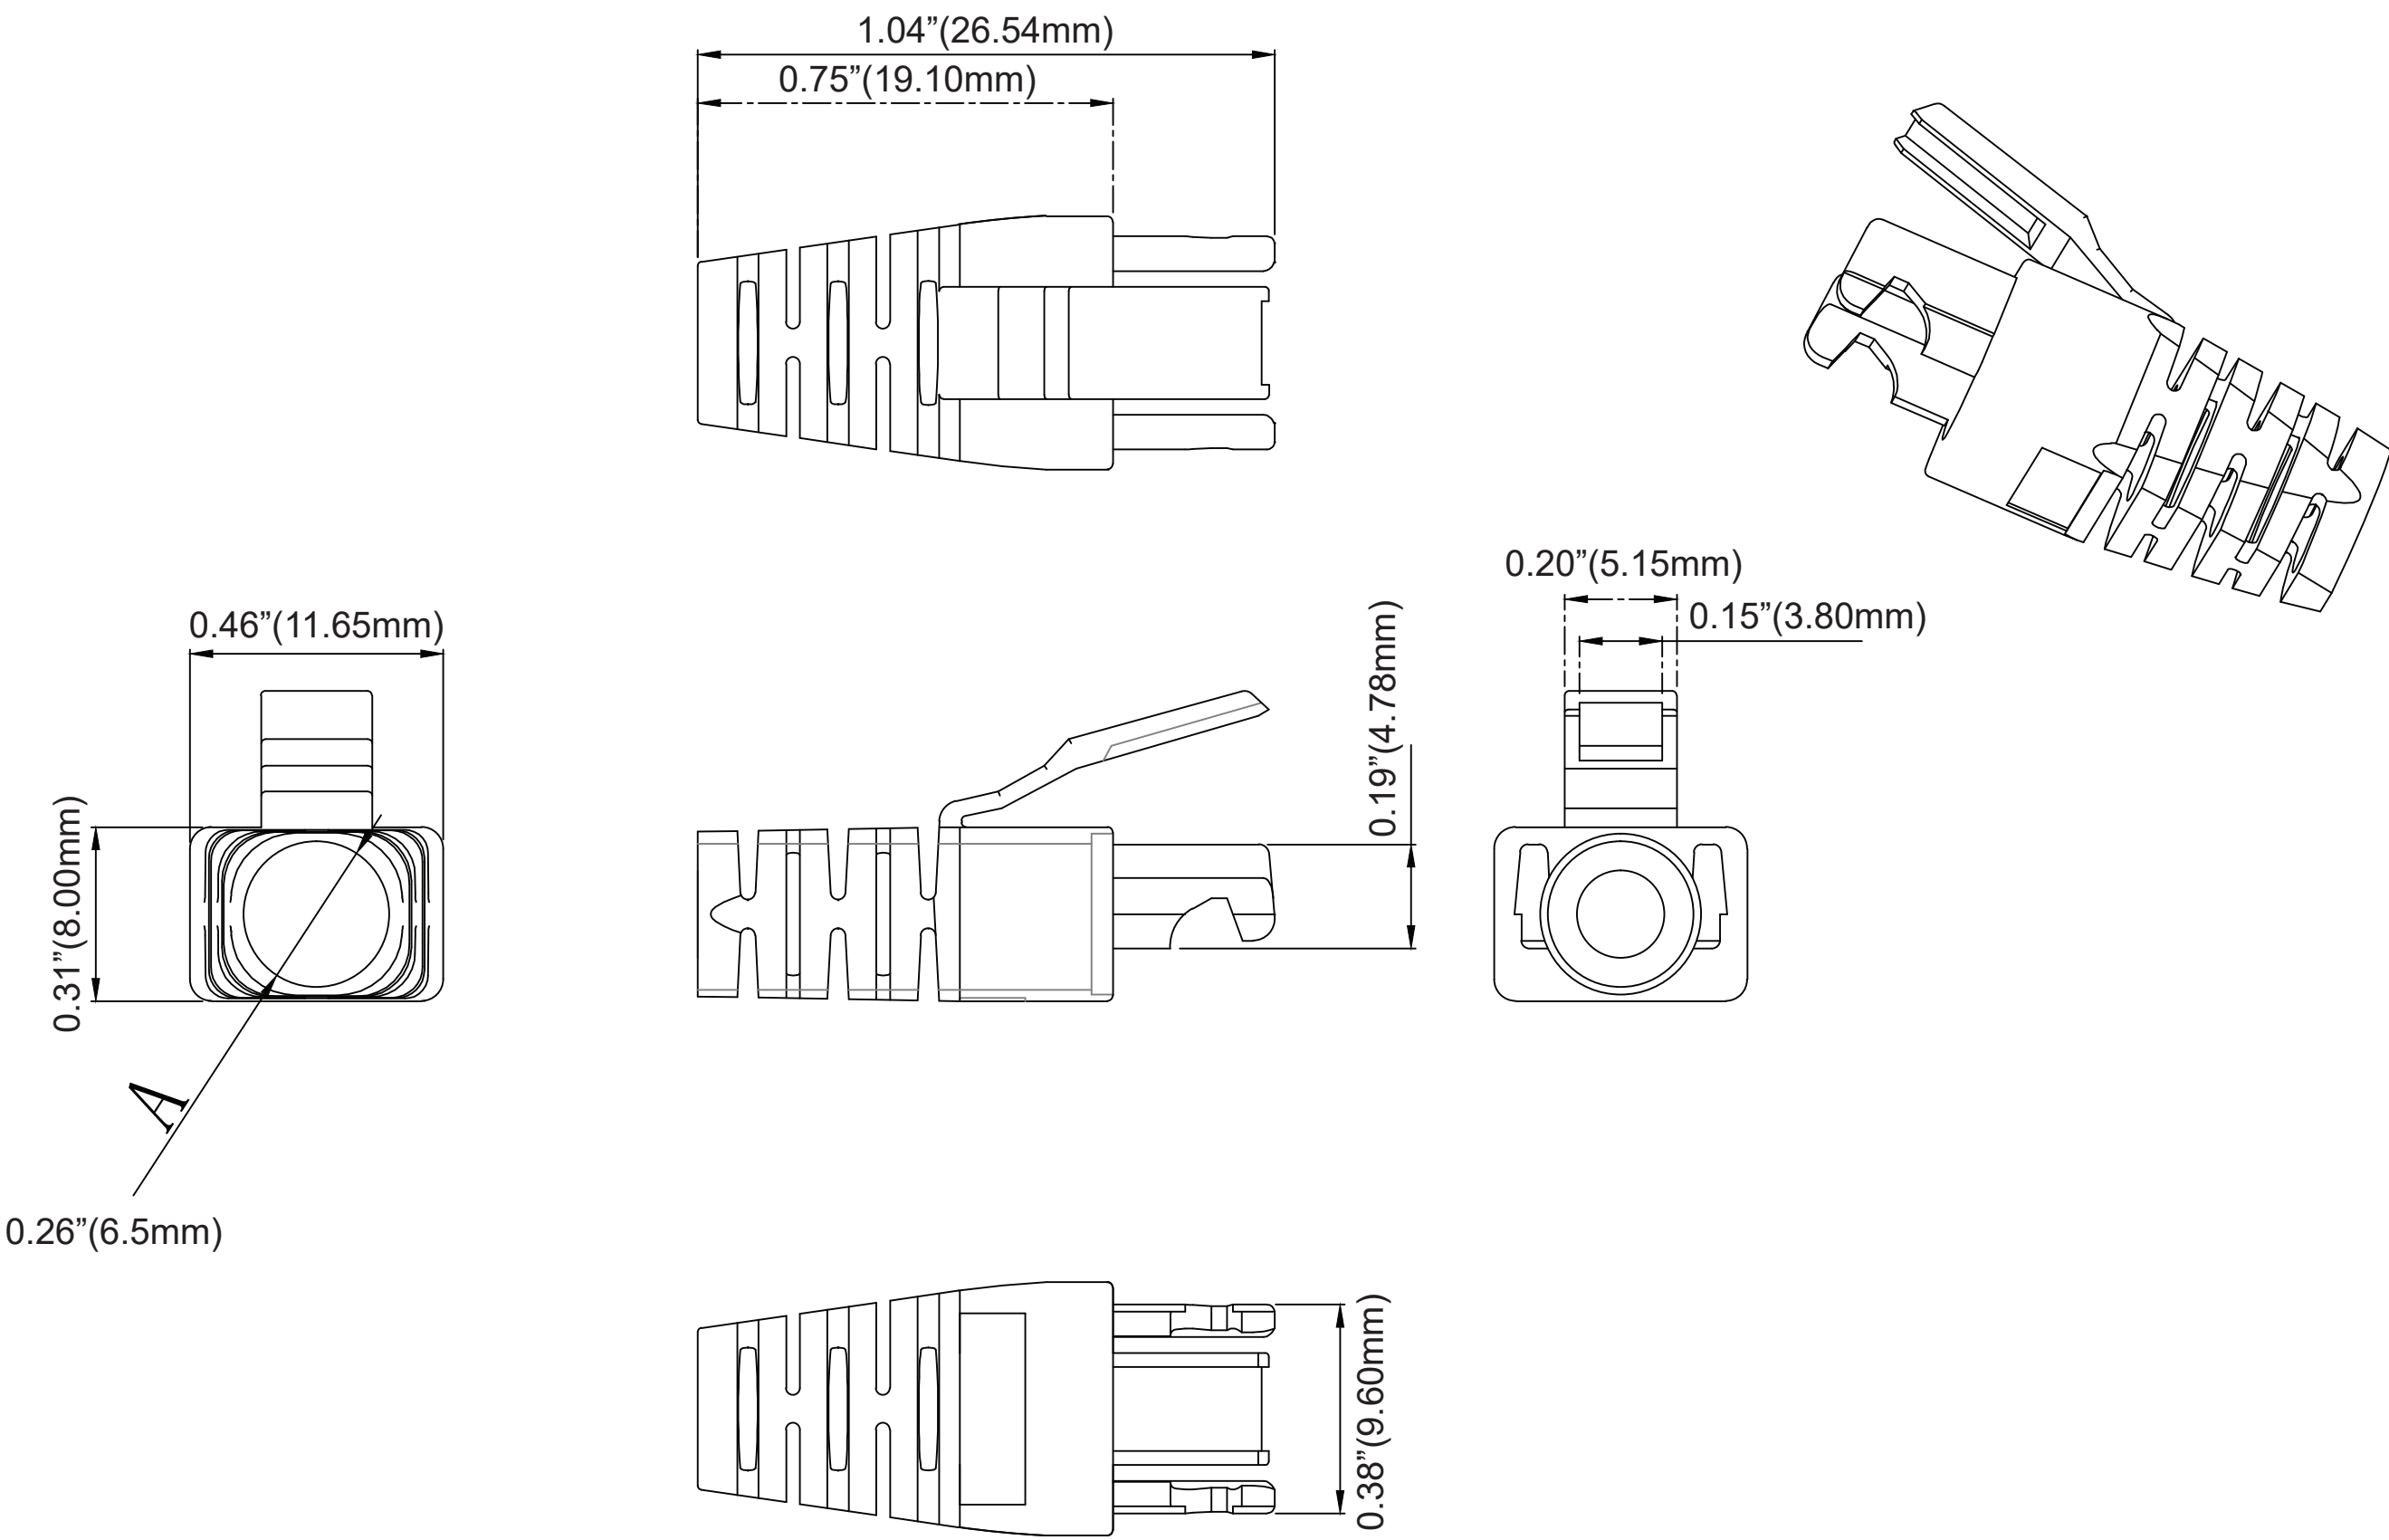

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION : Monoprice™ Cat6A Unshielded RJ45 Connectors with Break-Resistant Latch & Strain Relief Boot - Gold-Plated, for 23-26AWG UTP Cable, 50-Sets		
PID # : 49259 - 49264, 49372, 49373		
DATE :	UNIT : MM / IN	FILE NAME: