


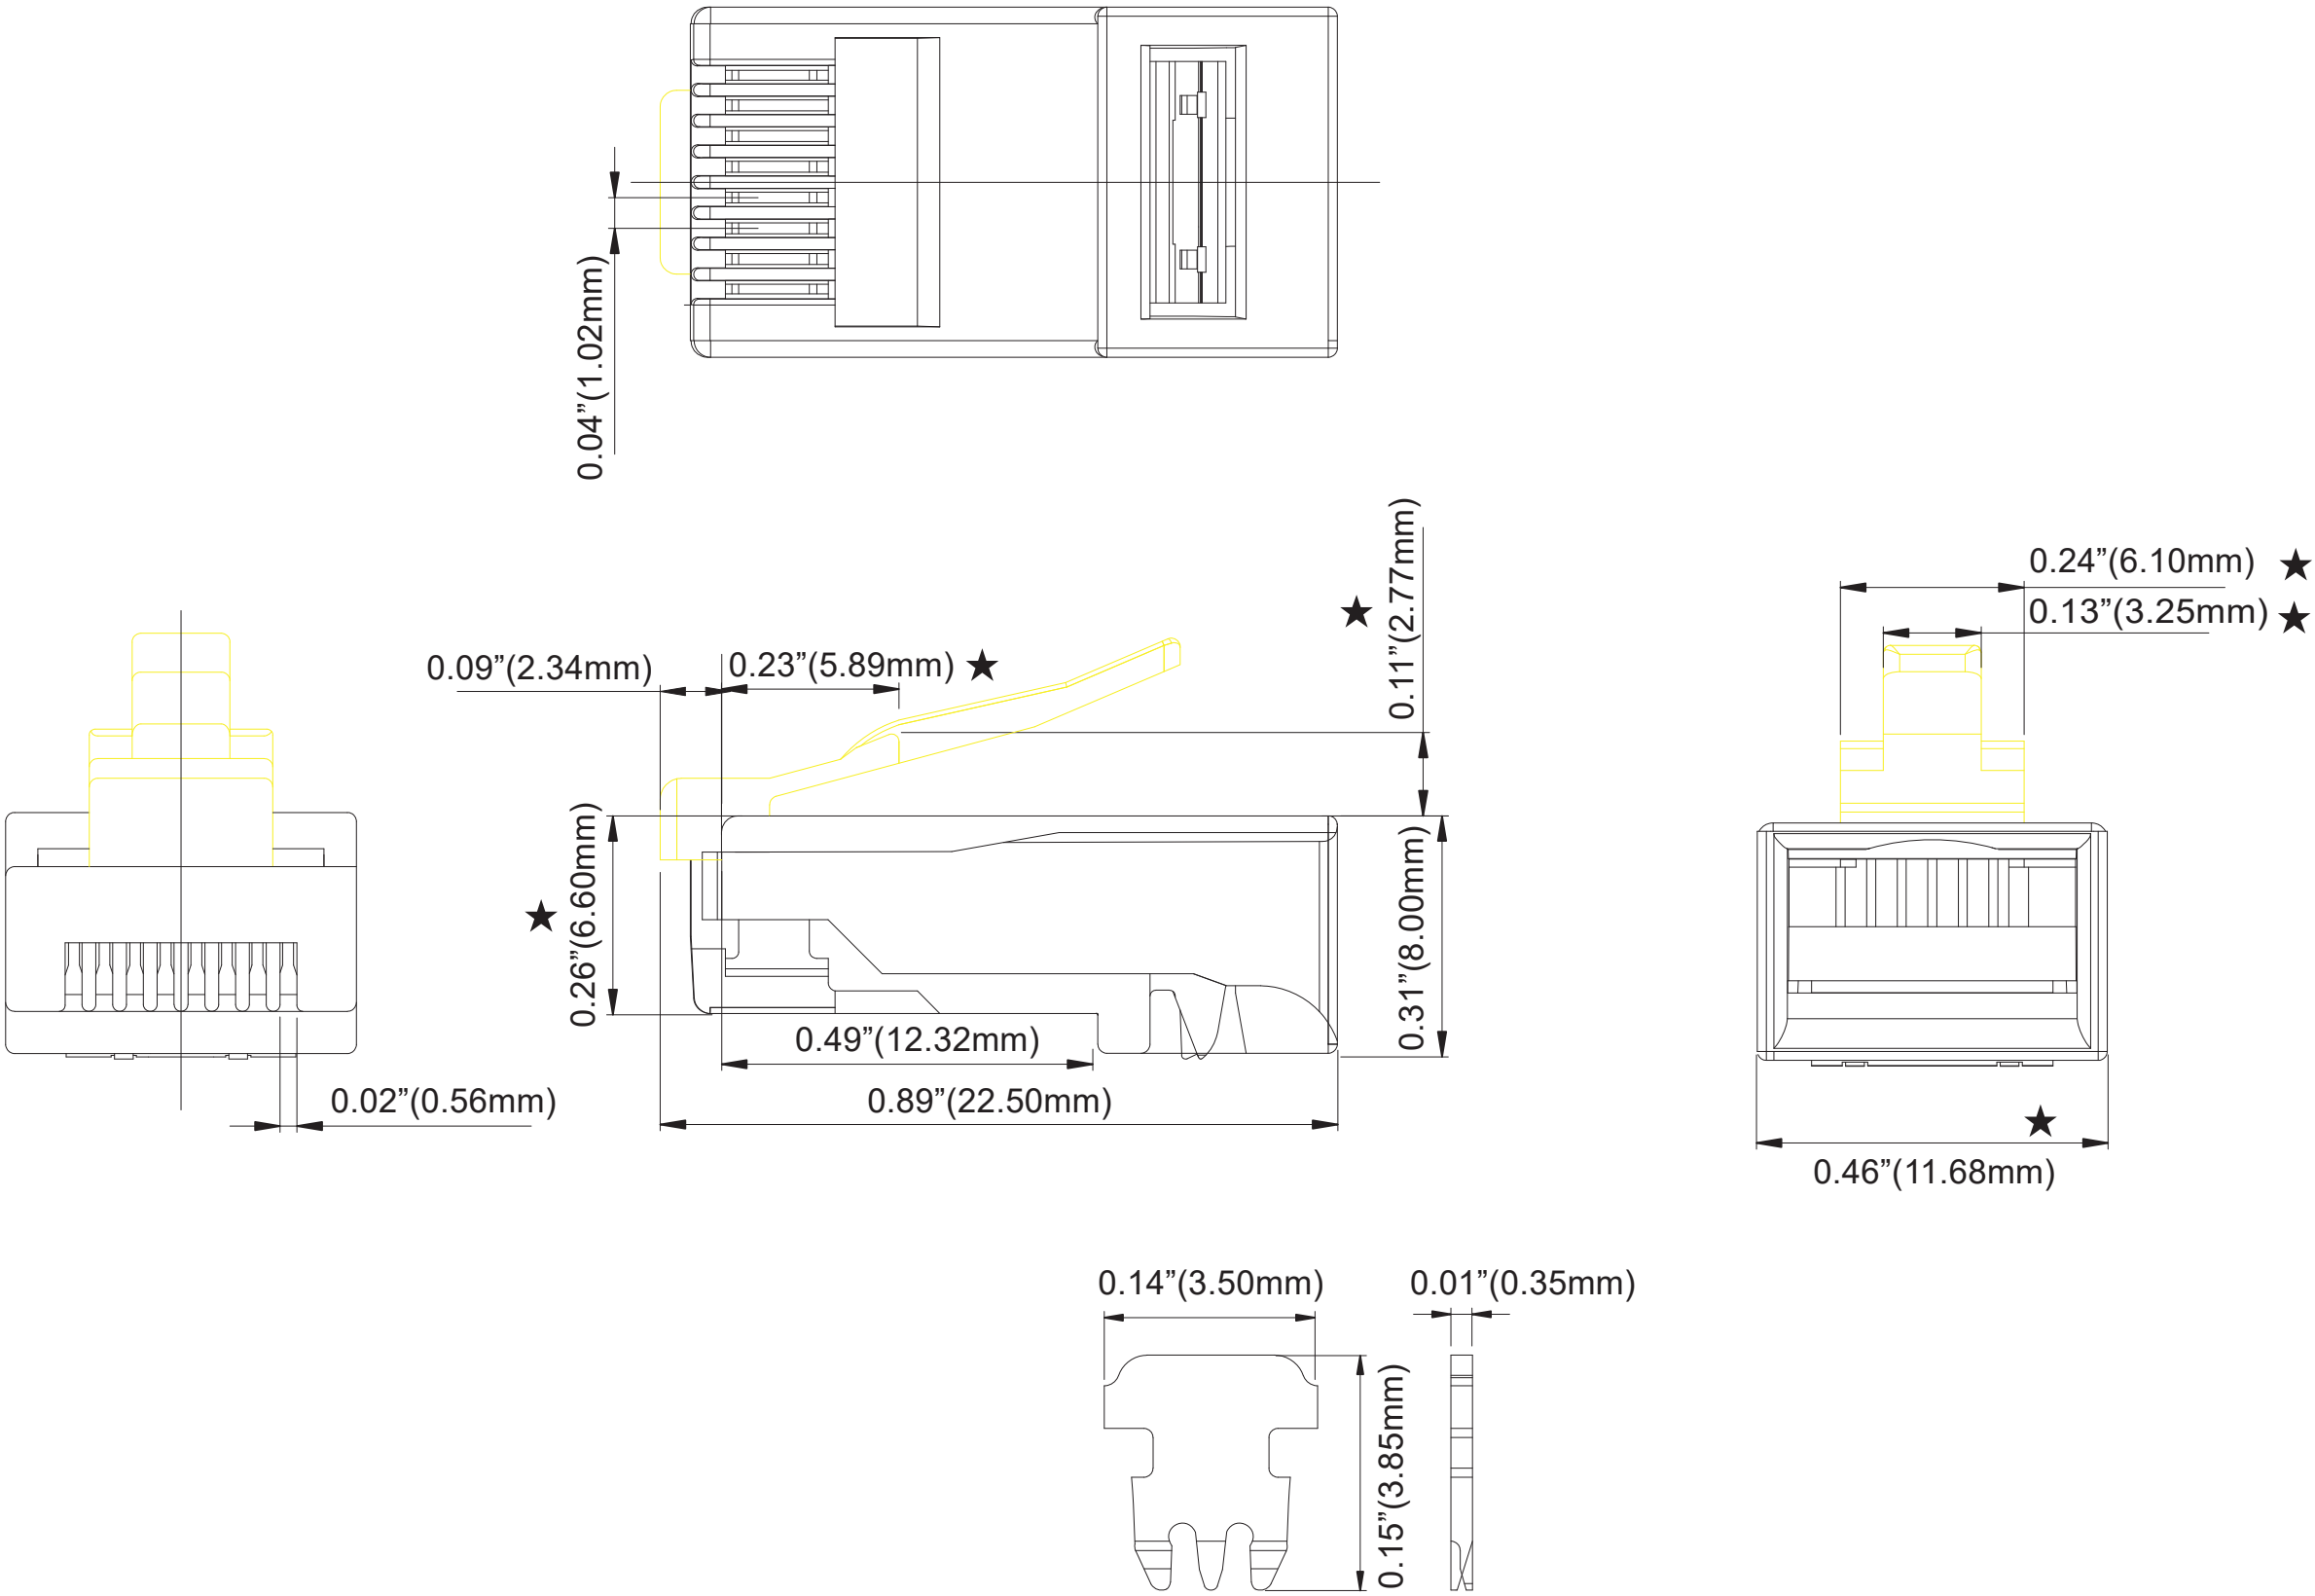

- NOTES:
- 1.Operation Temperature:-40°C~+85°C.
 - 2.Electrical Characteristics:
 - 2.1>Rated Current : 125V AC,1.5A@25°C.
 - 2.2>Contact Resistance : 20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown
 - 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force : 30N Max.
 - 3.2>Durability:750 cycles Min.
 - 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS and REACH etc.
 5. Latch Material: Nylon
Min. 5000 bending cycles without break

PID	Color	Pantone No
49265	Red	PT186C
49266	Green	PT336U
49267	Blue	PT301U
49268	Yellow	PT143C
49269	Gray	PT7534C
49270	White	RAL9003
49374	Orange	PT7578C
49375	Purple	PT2756C

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION :
Monoprice™ Cat6A Unshielded RJ45 Connectors with Break-Resistant Latch - Gold-Plated, for 24AWG UTP Cable, 100 plugs

PID # :
49265 - 49270, 49374, 49375

DATE :
UNIT :
MM / IN

FILE NAME: