


REVISION INFORMATION		
Rev.	Rev. Date	Brief Description



- NOTES:
- 1.Operation Temperature:-40°C~+85°C.
 - 2.Electrical Characteristics:
 - 2.1>Rated Current : 125V AC,1.5A@25°C.
 - 2.2>Contact Resistance : 20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown
 - 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force : 30N Max.
 - 3.2>Durability:750 cycles Min.
 - 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS and REACH etc.
 - 5. Latch Material: Nylon
 - Min. 5000 bending cycles without break


PID	Color	Pantone No
49271	Red	PT186C
49272	Green	PT336U
49273	Blue	PT301U
49274	Yellow	PT143C
49275	Gray	PT7534C
49276	White	RAL9003
49376	Orange	PT7578C
49377	Purple	PT2756C

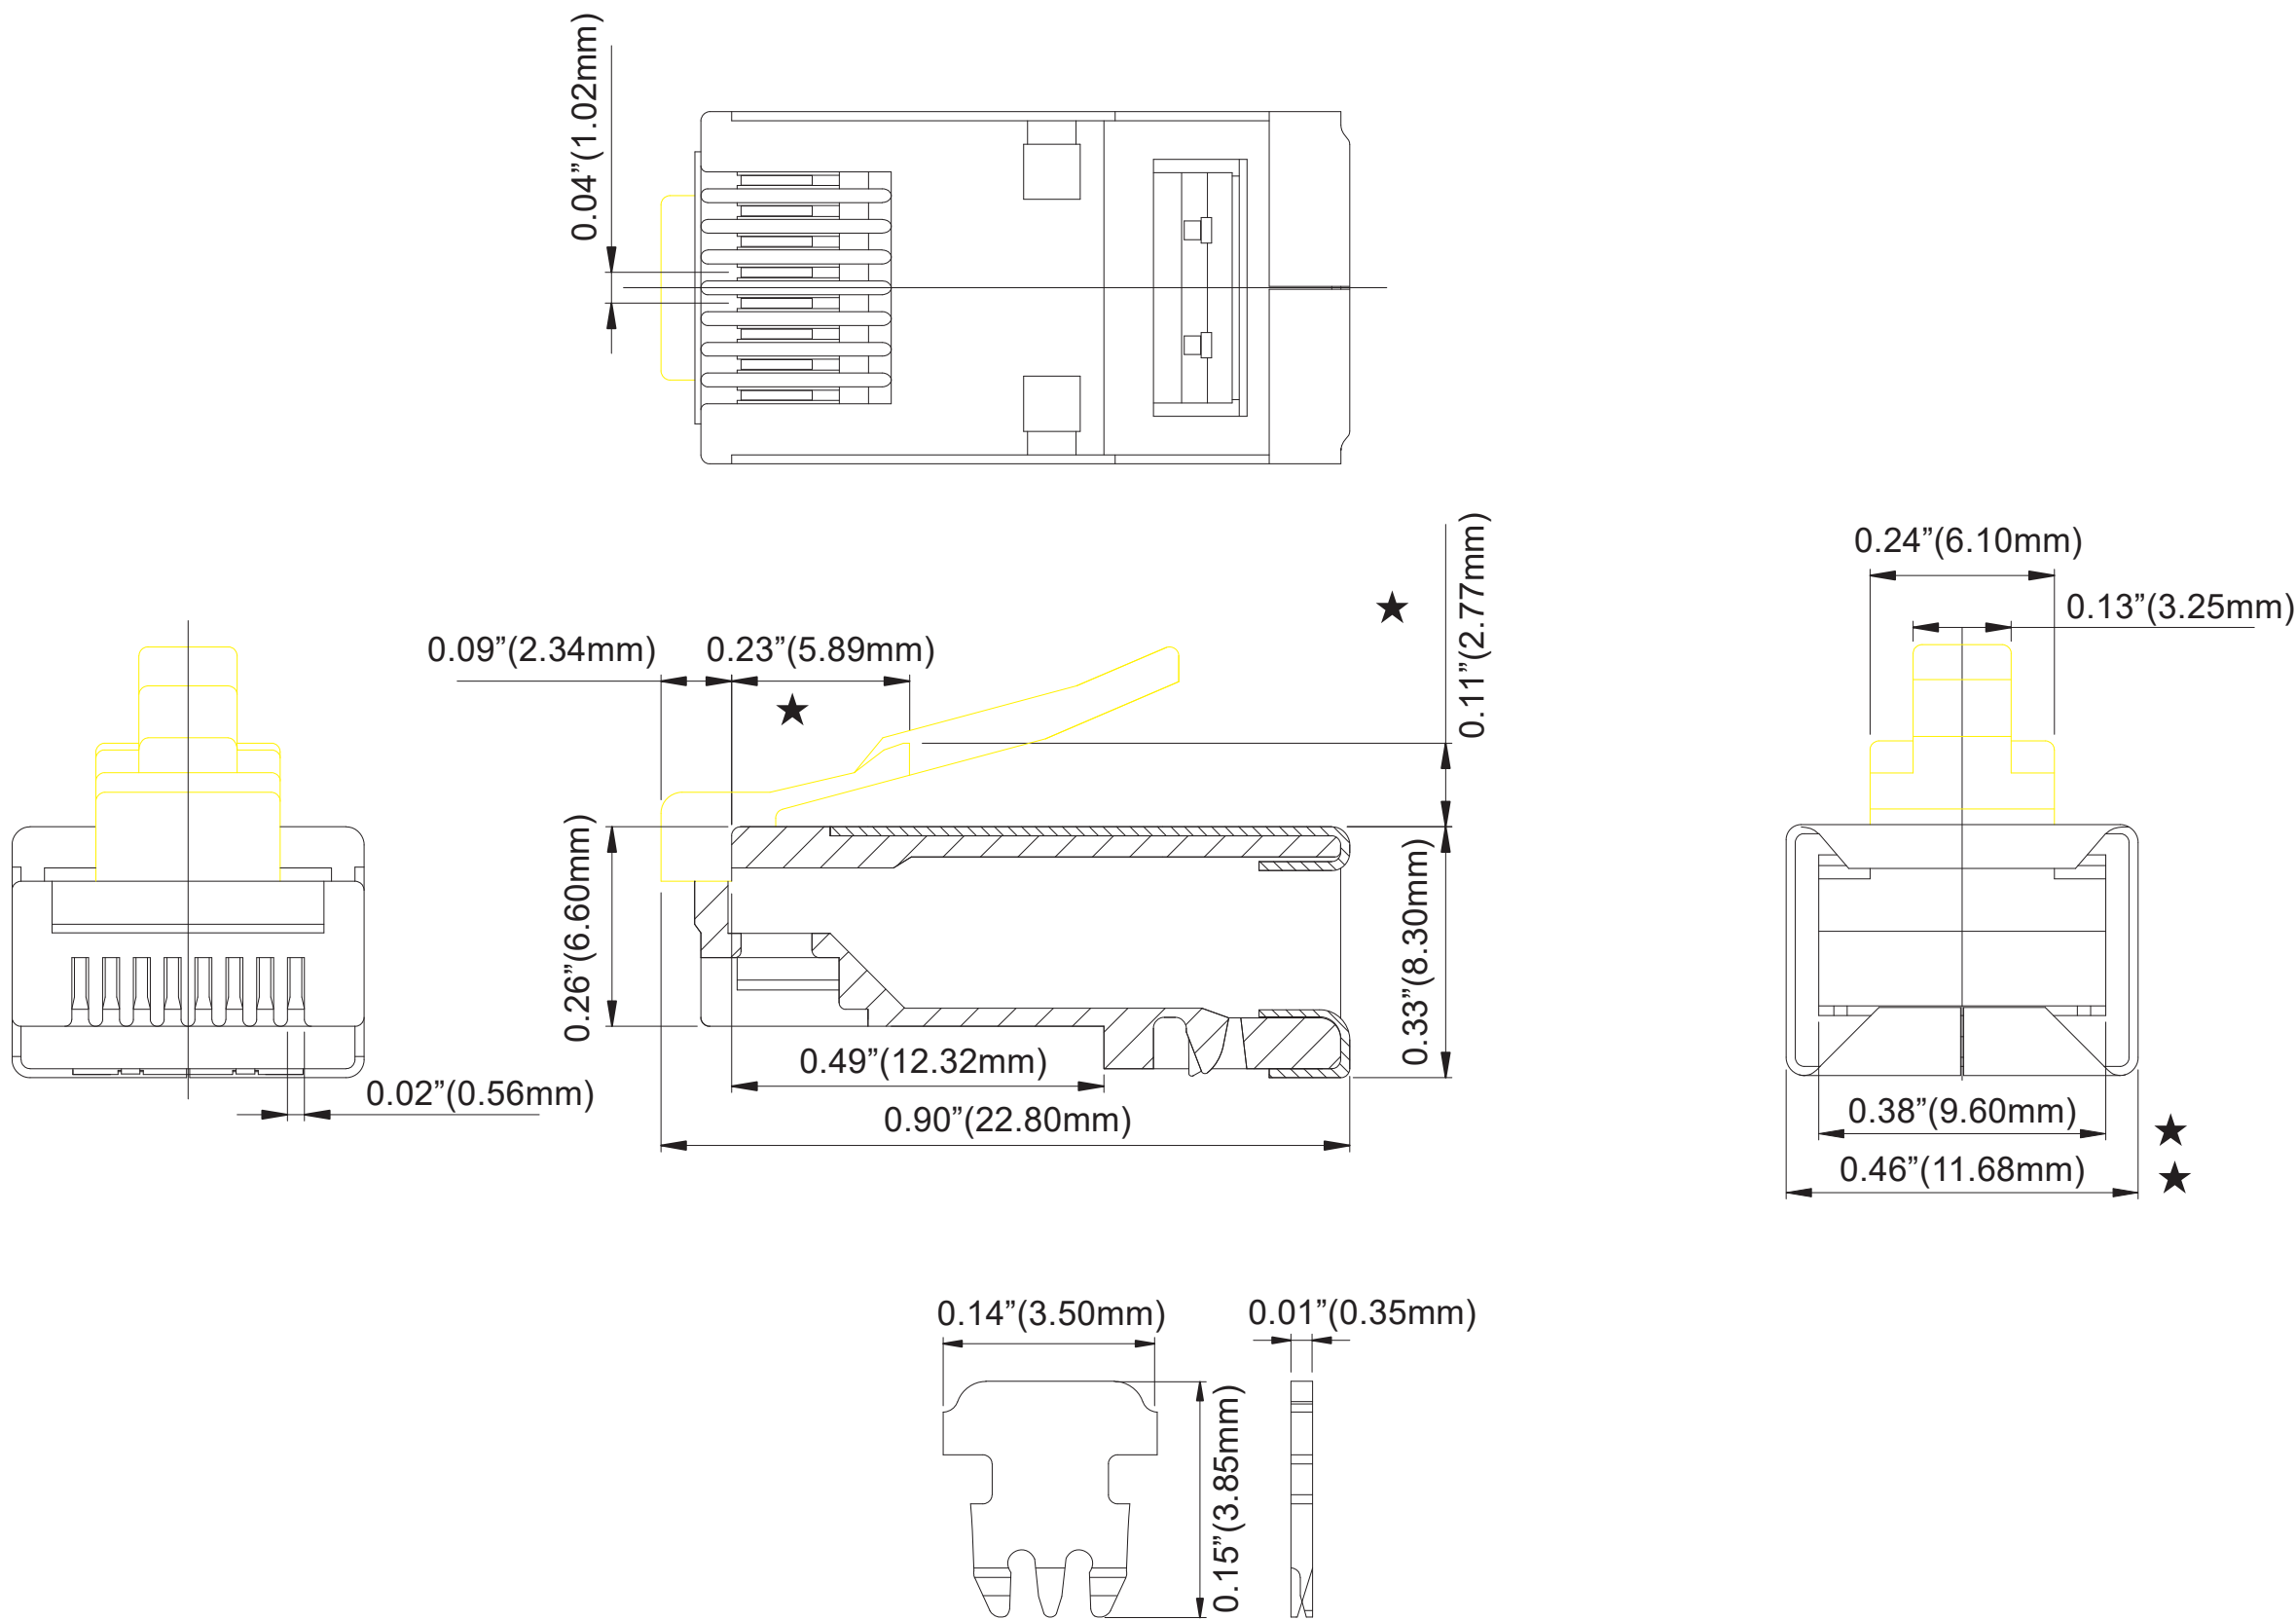

DESCRIPTION :		
Monoprice™ Cat6A Shielded RJ45 Connectors with Break-Resistant Latch & Strain Relief Boot - Gold-Plated, for 26AWG UTP Cable, 50-Sets		
PID # : 49271 - 49276, 49376, 49377		
DATE :	UNIT : MM / IN	FILE NAME:

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

REVISION INFORMATION		
Rev.	Rev. Date	Brief Description

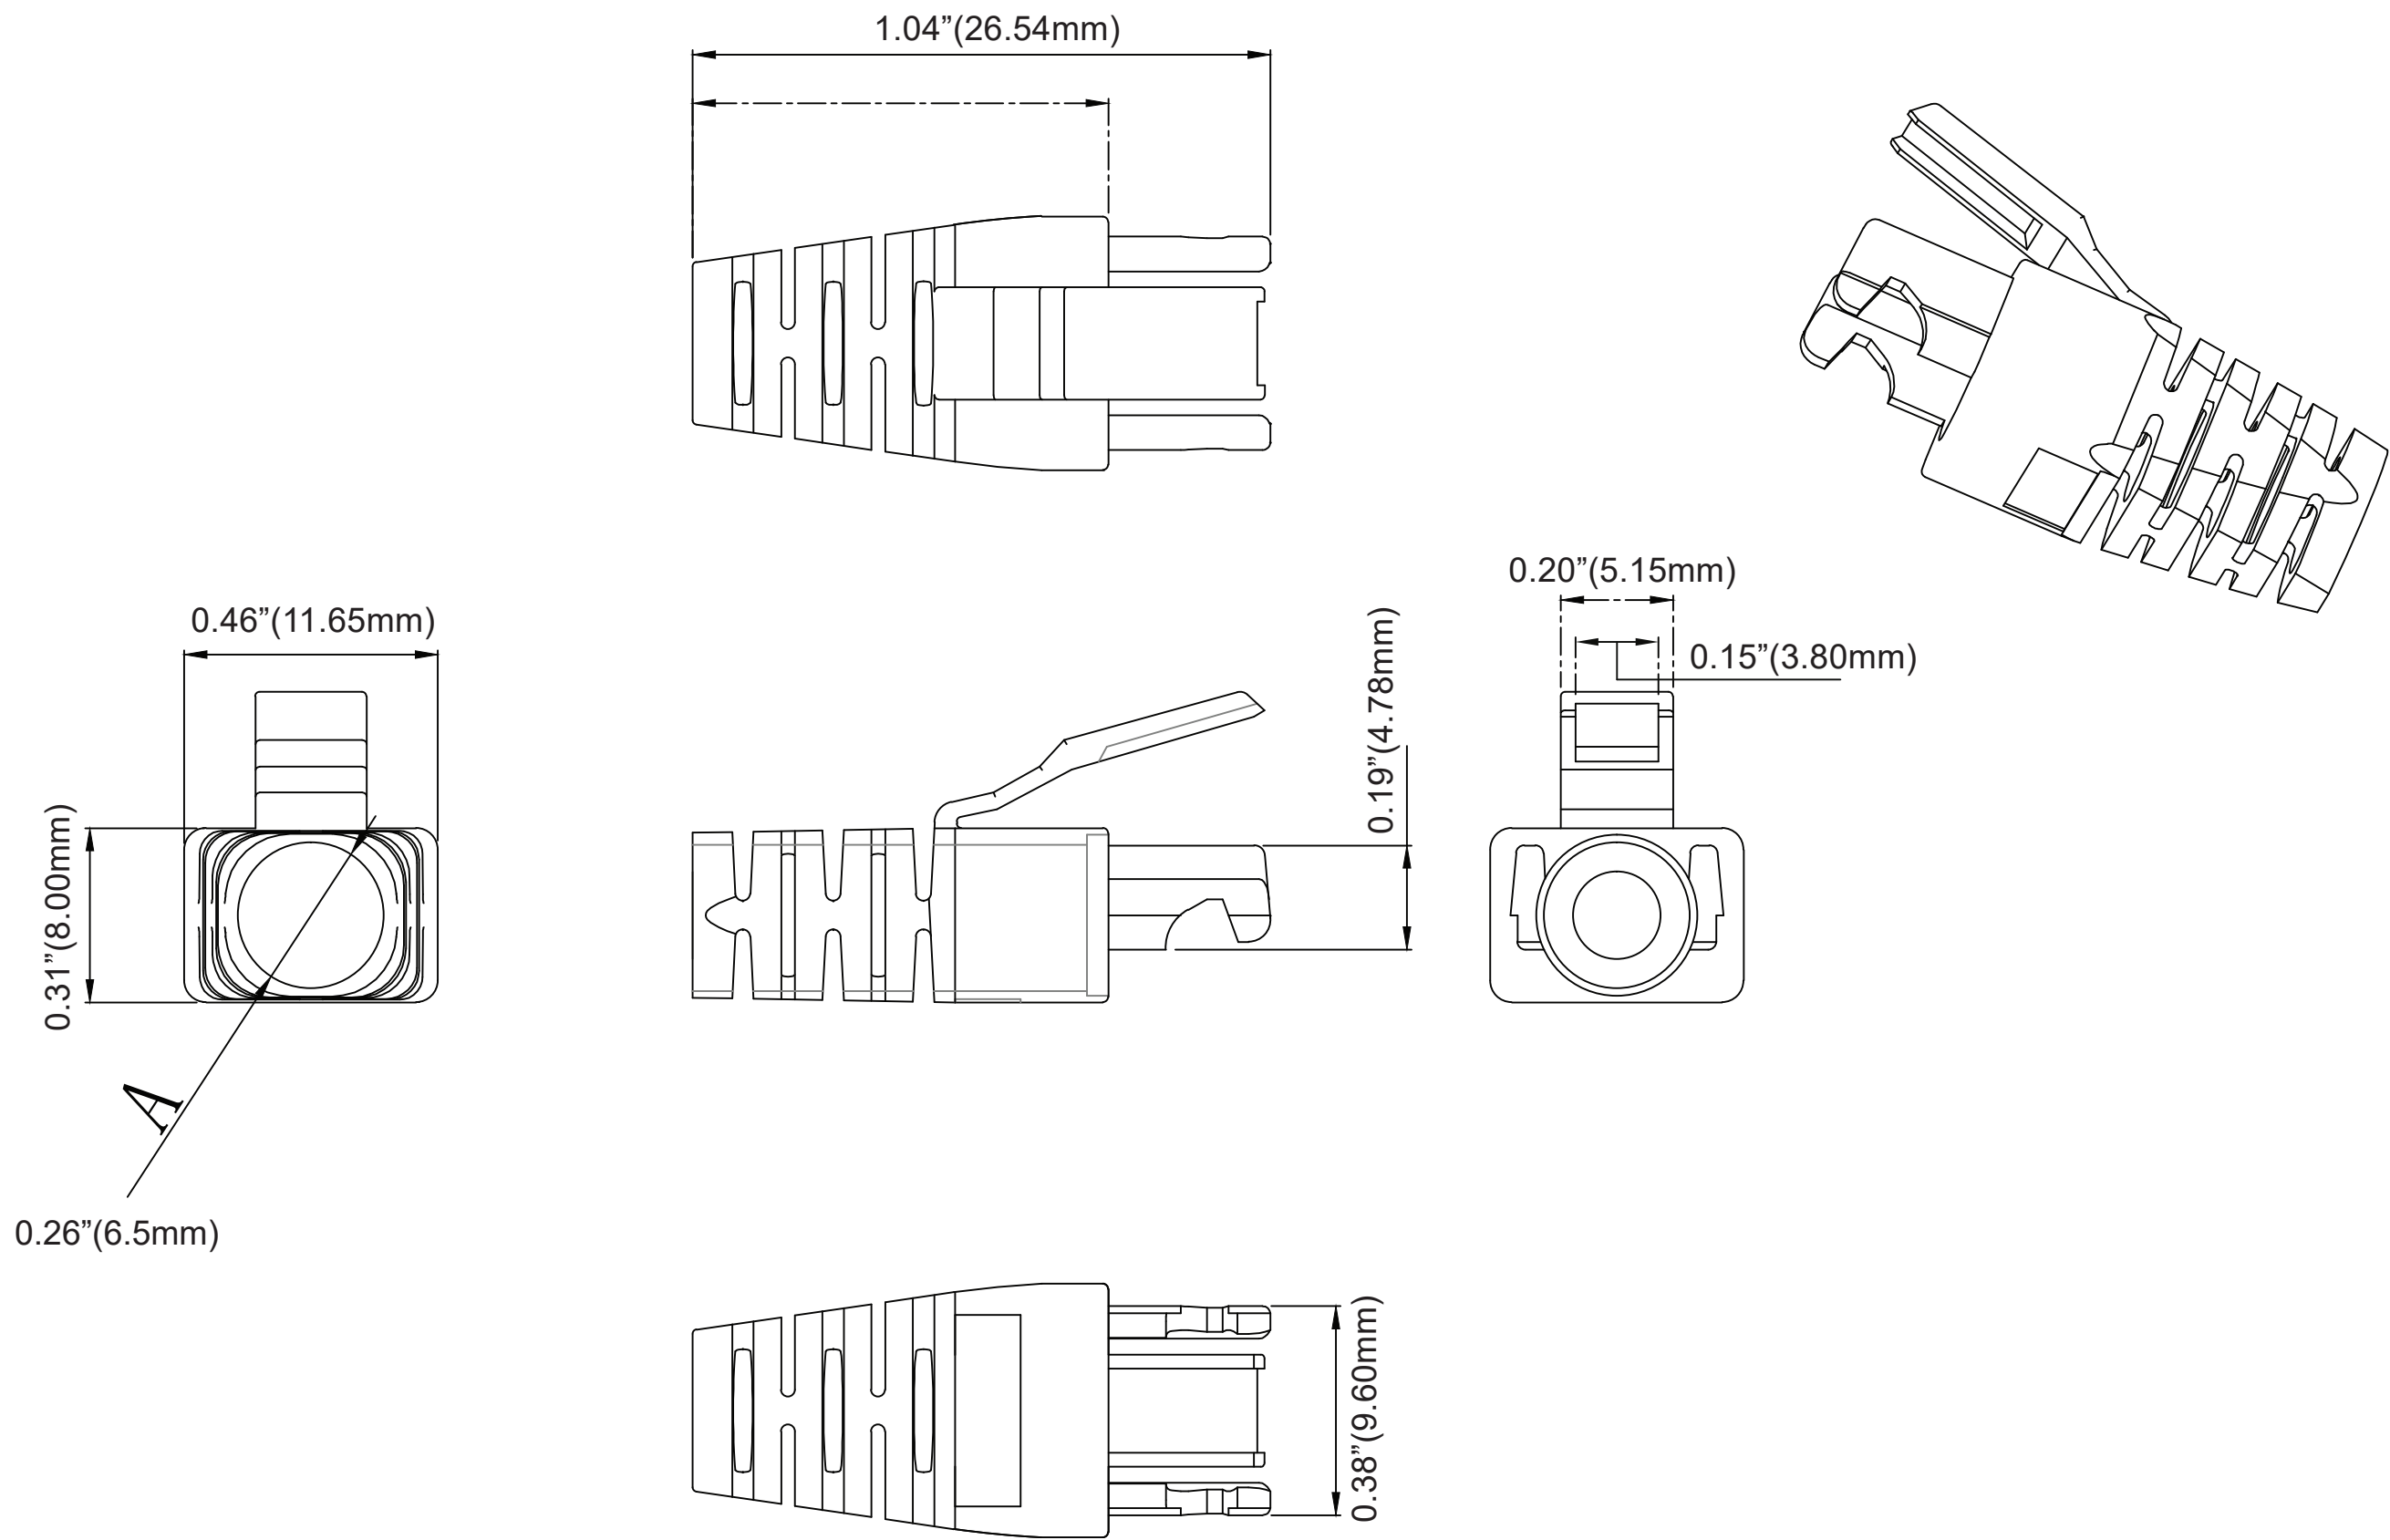

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION : Monoprice™ Cat6A Shielded RJ45 Connectors with Break-Resistant Latch & Strain Relief Boot - Gold-Plated, for 26AWG UTP Cable, 50-Sets		
PID # : 49271 - 49276, 49376, 49377		
DATE :	UNIT : MM / IN	FILE NAME: