


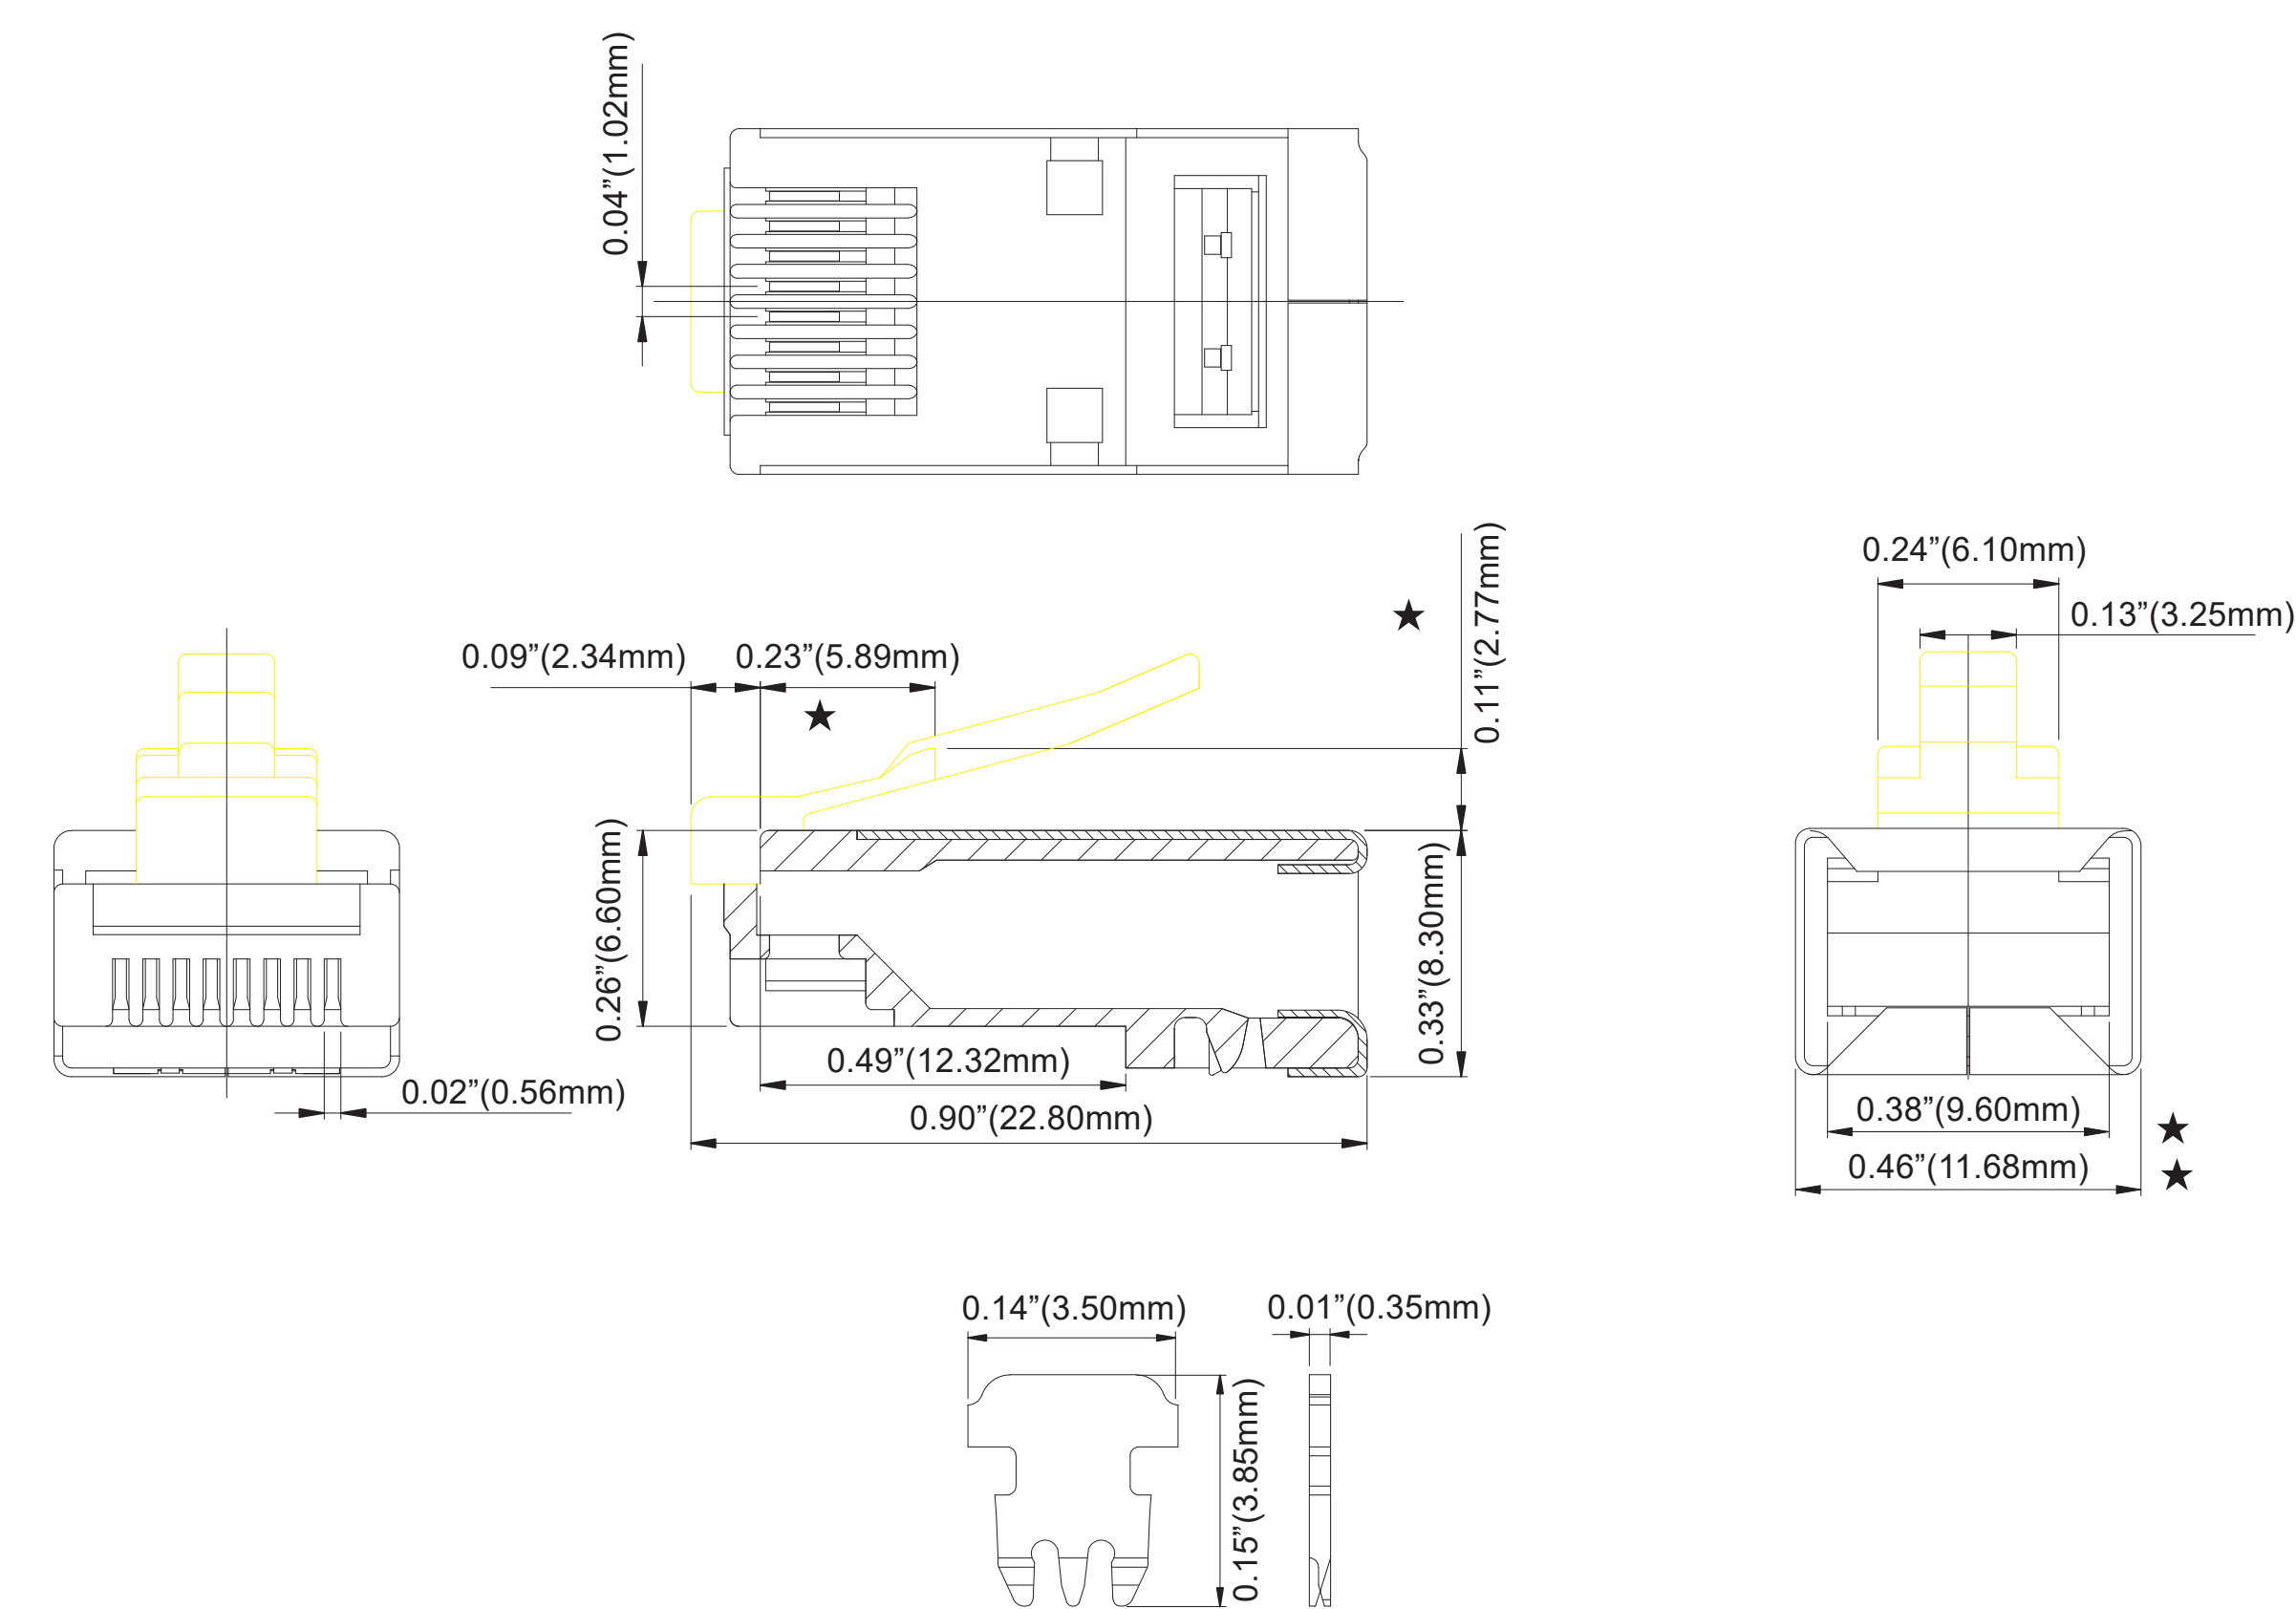

- NOTES:
- 1.Operation Temperature:-40°C~+85°C.
 - 2.Electrical Characteristics:
 - 2.1>Rated Current : 125V AC,1.5A@25°C.
 - 2.2>Contact Resistance : 20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown
 - 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force : 30N Max.
 - 3.2>Durability:750 cycles Min.
 - 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS and REACH etc.
 - 5. Latch Material: Nylon
 - Min. 5000 bending cycles without break

PID	Color	Pantone No
49277	Red	PT186C
49278	Green	PT336U
49279	Blue	PT301U
49280	Yellow	PT143C
49281	Gray	PT7534C
49282	White	RAL9003
49378	Orange	PT7578C
49379	Purple	PT2756C

NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT

MONOPRICE

DESCRIPTION :
Monoprice™ Cat6A Shielded RJ45 Connectors with Break-Resistant Latch - Gold-Plated, for 26AWG UTP Cable, 100 plugs

PID # : 49277, 49278, 49279, 49280, 49281, 49282, 49378, 49379

DATE :UNIT : MM / INFILE NAME: