


| RoHS COMPLIANT |            | VERSION INFORMATION (Vendor) |                       |
|----------------|------------|------------------------------|-----------------------|
| Rev.           | Rev. Date  | Modified By                  | Brief Description     |
| V1             | 2021.08.09 | XYH                          | Initial Issue         |
| V2             | 2023.03.09 | LOF                          | Add PH cable printing |

Length

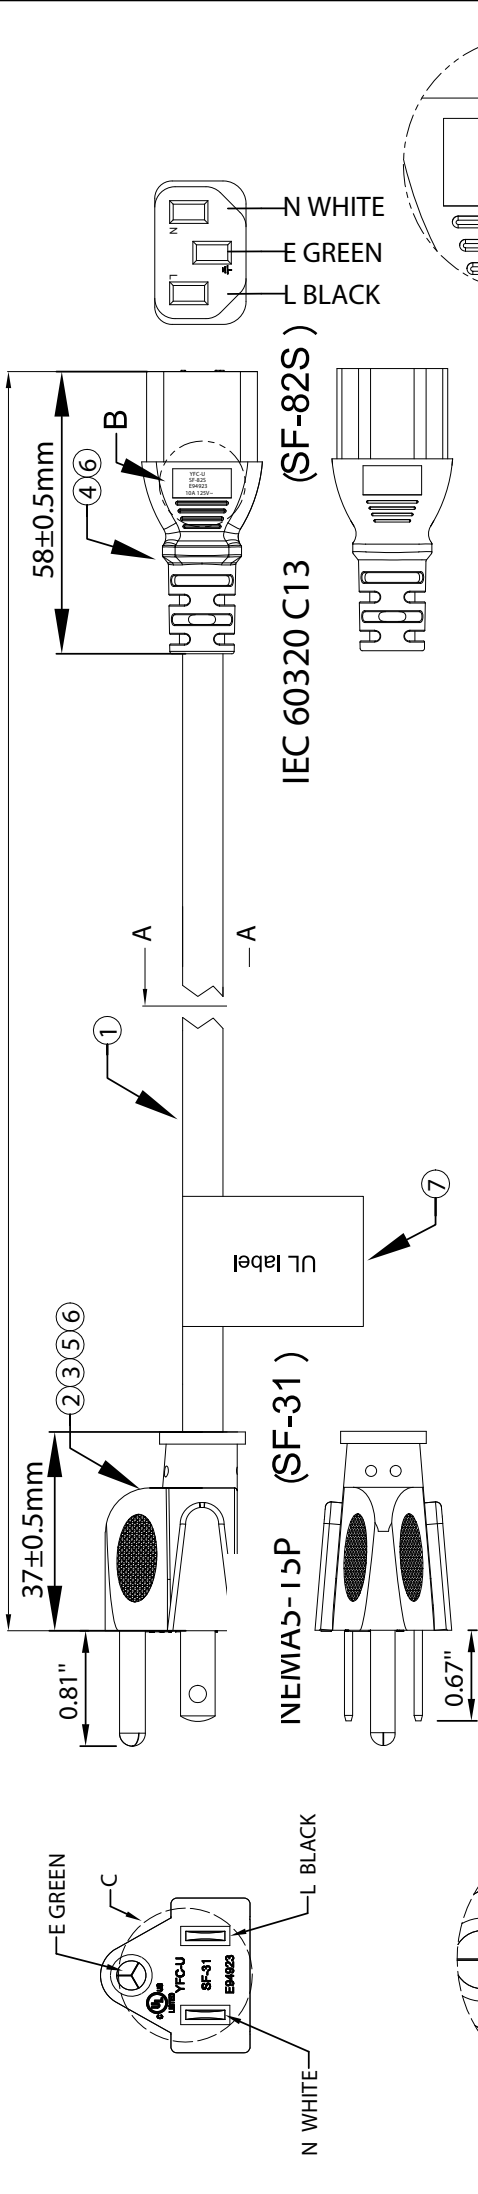

WIRE MARKING WX (NO.701):

(UL) E135710-F5 SVT 3X18AWG 105  
c(UL) SVT 3X0.824mm2(18AWG) 105

℃ 300V VW-1


℃ 300V FT2

WIRE MARKING PH (NO.883):

(UL) E135710-F7 SVT 3X18AWG 105  
(UL) SVT 3X0.824mm2(18AWG) 105

℃ 300V VW-1


℃ 300V FT2



C  
3:1

| PID  | Color | Length (FT ) |
|------|-------|--------------|
| 5277 | Black | 1±0.5        |
| 5278 | Black | 3±0.1        |
| 5279 | Black | 6±0.1        |
| 5280 | Black | 10±0.15      |
| 5281 | Black | 15±0.15      |

| Pinout             |                                 |
|--------------------|---------------------------------|
| NEMA5-15P<br>SF-31 | Wire IEC 60320 C13<br>(SF-82S ) |
| E                  | GREEN E                         |
| N                  | WHITE N                         |
| L                  | BLACK L                         |



| Polarity and Continuity Test                    |                 |
|-------------------------------------------------|-----------------|
| Dielectric Voltage Withstand Test :1500V /1 Sec |                 |
| Electrical Performance (20°C)                   |                 |
| Item                                            | Parameter       |
| Conductor resistance                            | ≤ 22.84 Ω/1000m |
| Voltage Rating                                  | AC 300V         |

|     |           |                                                                              |     |      |
|-----|-----------|------------------------------------------------------------------------------|-----|------|
| ⑦   | UL label  | General Use Cord set                                                         | 1   | PC   |
| ⑥   | Molding   | PVC 40P                                                                      | AR  | G    |
| ⑤   | Housing   | Bracket 5-15P Three Plug Black PBT UL94-V0                                   | 1   | PC   |
| ④   | Terminal  | C13Terminal Brass Natural color and Bracket, With 18-14AWG. White            | 1   | PC   |
| ③   | Terminal  | 5-15P Non-Polar, Current Carrying End, With Riveting 18-16AWG Nickel Plating | 2   | PCS  |
| ②   | Terminal  | 5-15P Terminal Nickel Plated 18-16AWG                                        | 1   | PC   |
| ①   | Cable     | SVT 18AWGx3C 105 ℃ Black                                                     | 1   | PC   |
| NO. | PART NAME | SPECIFICATION DESCRIPTION                                                    | QTY | UNIT |

**MONOPRICE**

| VENDOR CODE:           |  | DESCRIPTION:                                                                               |             |
|------------------------|--|--------------------------------------------------------------------------------------------|-------------|
| V16988                 |  | Monoprice Power Cord - NEMA 5-15P to IEC 60320 C13, 18AWG, 10A/1250W, 125V, 3-Prong, Black |             |
| APPROVED BY PM & DATE: |  | PID #:                                                                                     |             |
| Jessica Liu            |  | 5277.5278.5279.5280.5281                                                                   |             |
| PM PRINT NAME:         |  | DATE:                                                                                      | FILE NAME:  |
|                        |  | 2023.03.09                                                                                 | PID_PRODUCT |