
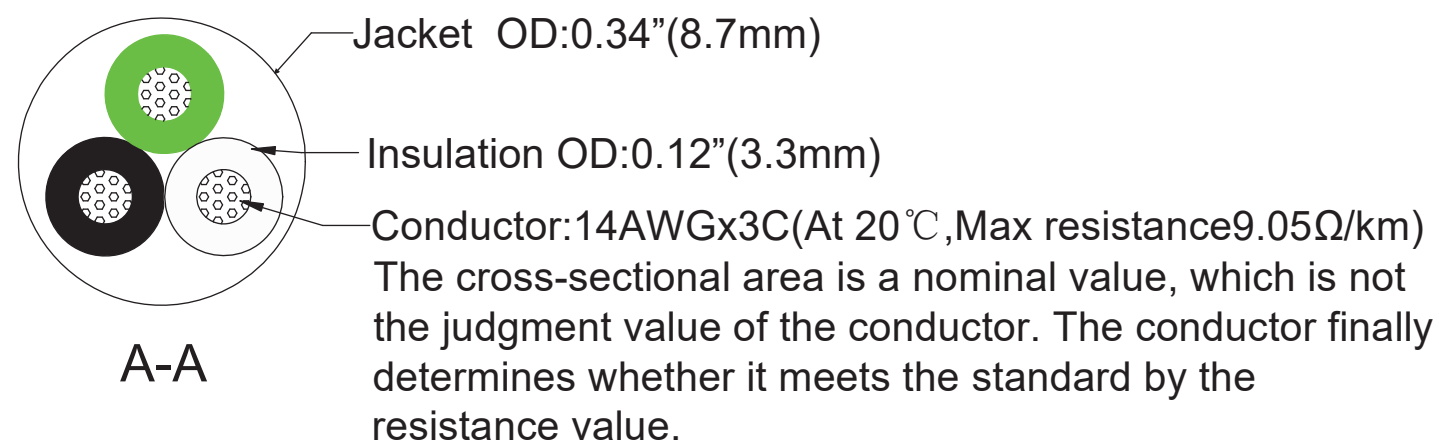
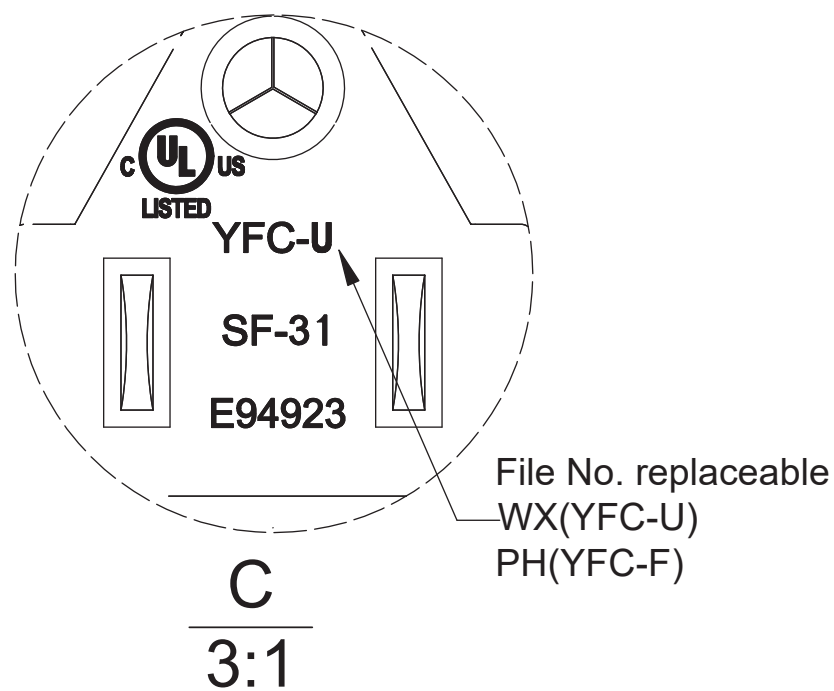


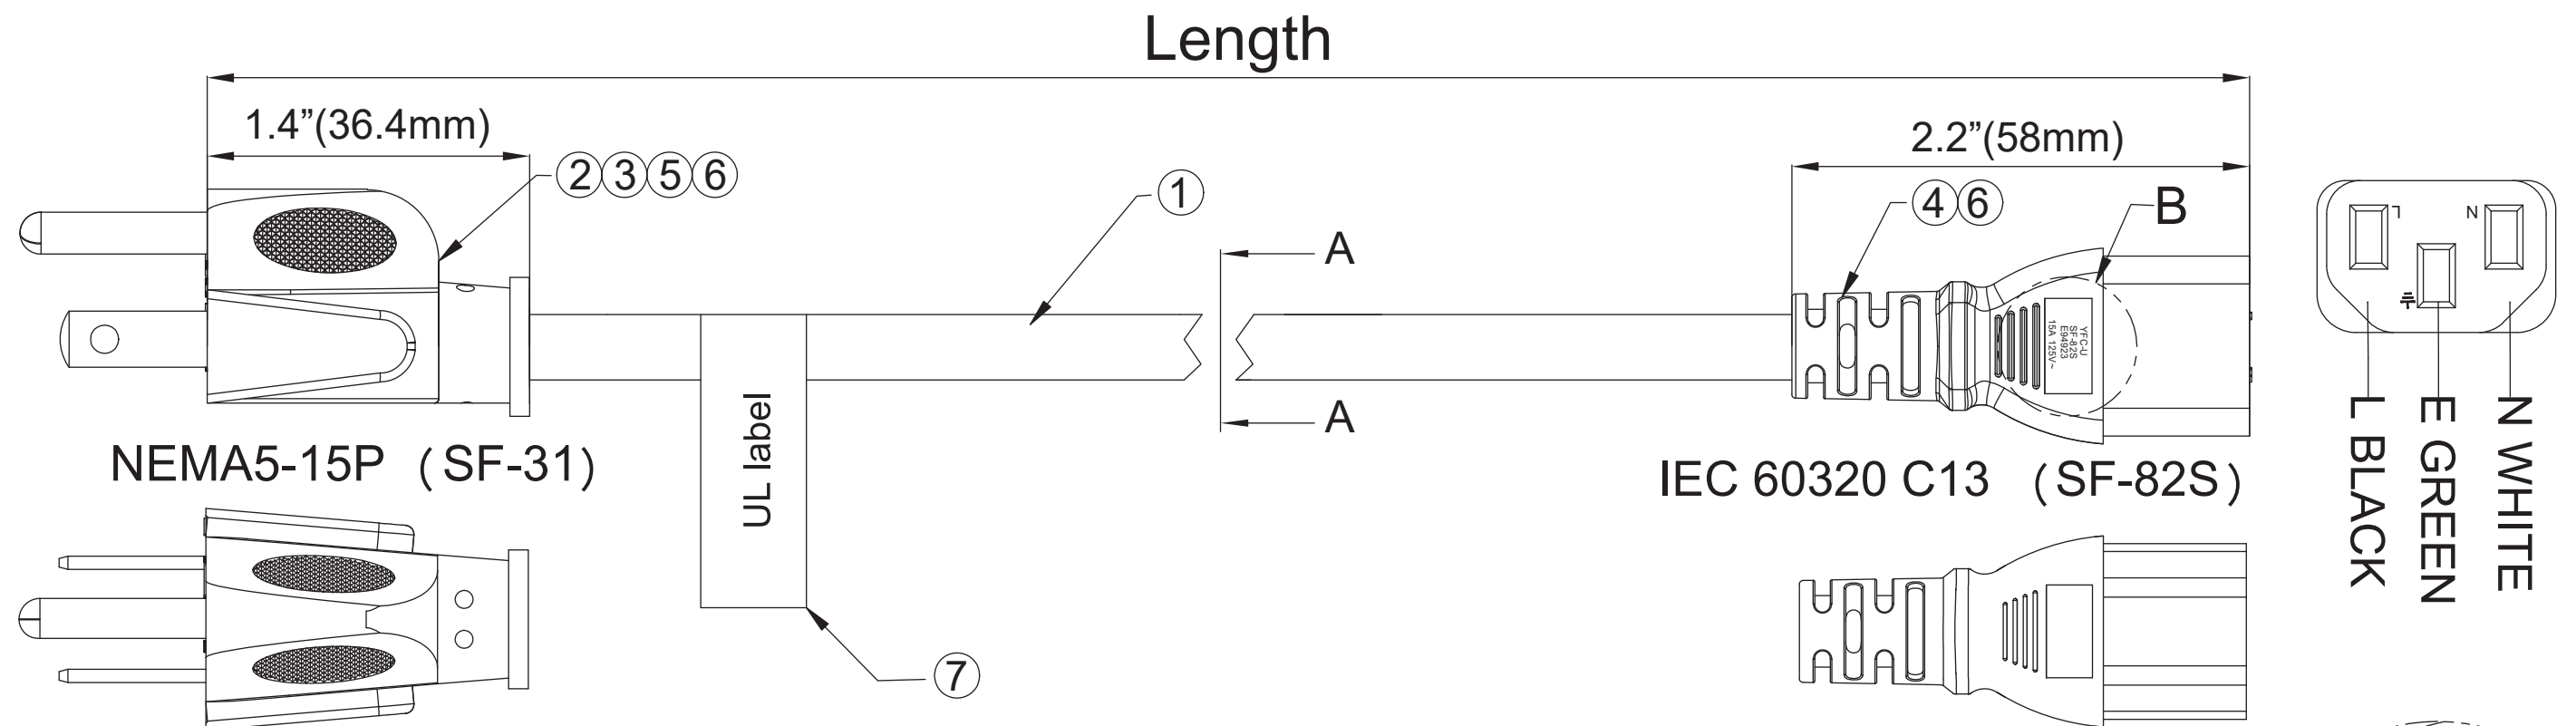

PID	Color	Length(FT)
5289	Black	1ft(12")
5290	Black	2ft(24")
5291	Black	3ft(36")
5292	Black	6ft(72")
5293	Black	10ft(120")
5294	Black	15ft(180")
5295	Black	25ft(300")
43183	White	2ft(24")
43184	White	3ft(36")
43185	White	6ft(72")

Pinout		
NEMA5-15P SF-31	Wire	IEC 60320 C13 (SF-82S)
E	GREEN	E
N	WHITE	N
L	BLACK	L

Polarity and Continuity Test	
Dielectric Voltage Withstand Test : 1500V/1 Sec	
Electric Performance (20°C)	
Item	Parameter
Conductor resistance	$\leq 9.05\Omega/1000m$
Voltage Rating	AC 300V

⑦	UL Label	General Use Cord set	1	PC
⑥	Molding	PVC 40P	AR	G
⑤	Housing	Bracket 5-15P Three Plug PBT UL94-V0	1	PC
④	Terminal	C13 Terminal Brass Natural color and Bracket, With 18-14AWG. White	1	PC
③	Terminal	5-15P Non-Polar, Current Carrying End, With Riveting 18-14AWG Nickel Plating	2	PCS
②	Terminal	5-15P Terminal Nickel Plated 18-14AWG	1	PC
①	Cable	SJT 14AWGx3C 105°C	1	PC
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT



DESCRIPTION :

Monoprice™ Power Cord - NEMA 5-15P to IEC 60320 C13, 14AWG, 15A/1875W, 125V, SJT, 3-Prong, 15ft, Black

PID # :

5294

DATE :

UNIT :

UNIT: FT / IN / MM

FILE NAME:
