


REVISION INFORMATION		
Rev.	Rev. Date	Brief Description
V1	2020-06-15	Initial Issue

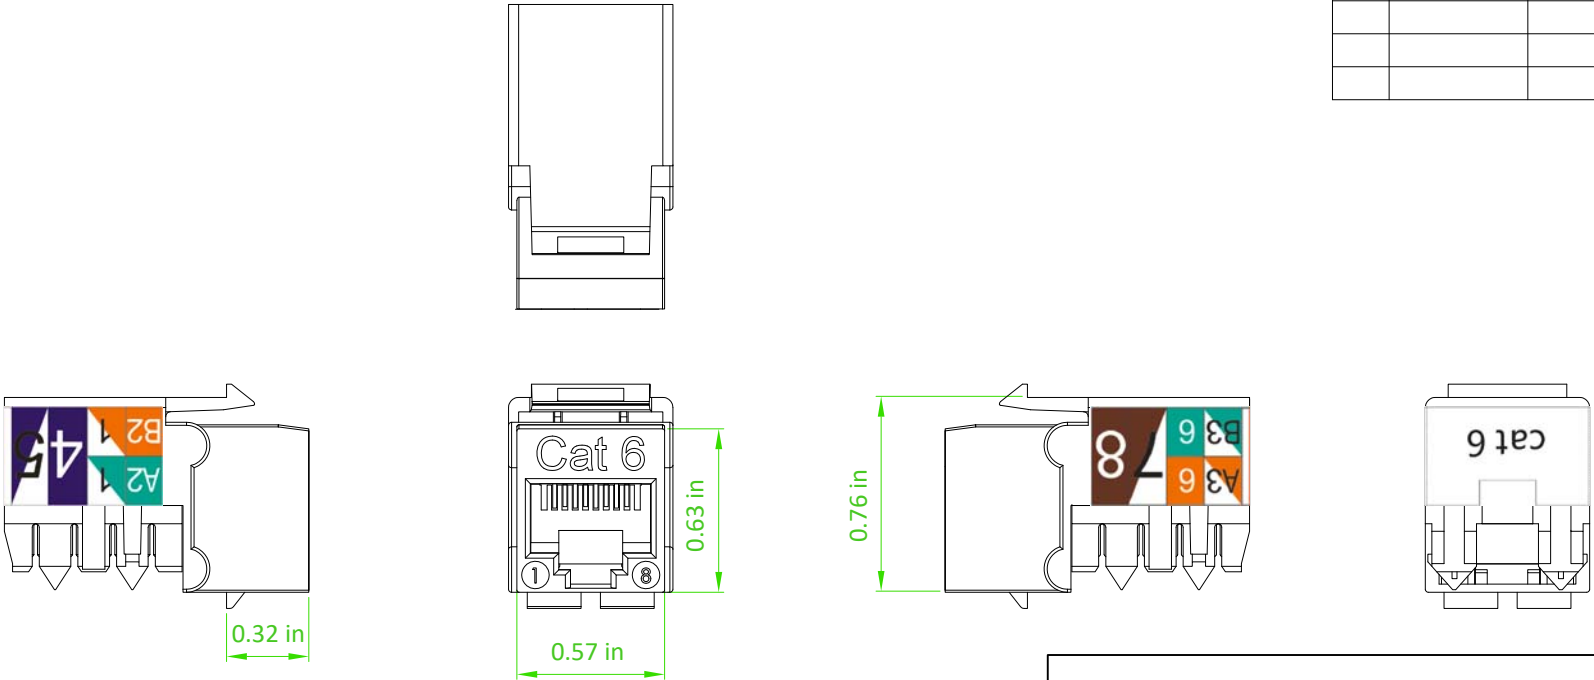


MATERIAL
KEYSTONE JACK HOUSING: PC HIGH-IMPACT UL94V-0 THERMOPLASTIC.
SPRING PIN: PHOSPHOR BRONZE C5210-EH, T=0.35MM;
PLATING NICKEL UNDERCOAT,
BESIDES PLATING 50U" GOLD OVER THE PLATED SURFACE ON CONTACT AREA.
IDC HOUSING: PC HIGH-IMPACT UL94V-0 THERMOPLASTIC.
IDC CONTACT: PHOSPHOR BRONZE C5191R-H, T=0.4MM, PLATING 100U" SOFT NICKEL .
PCB: FR-4

PHYSICAL CHARACTERISTICS
INSERTION LIFE: 750 MATING CYCLES WITH FCC COMPLIANT 8P PLUG.
CONTACT FORCE: 100 GRAMS WITH FCC COMPLIANT 8P PLUG.
PLUG RETENTION FORCE: 11 LBF MIN.
DURABILITY: 200 TERMINATION CYCLES.
CONTACT COMPATIBILITY: ACCOMMODATES 22 TO 24 AWG SOLID.
OPERATING TEMPERATURE RANGE: -10°C TO 60°C.
STORAGE TEMPERATURE RANGE: -40°C TO 68°C.
HUMIDITY: 10%~90% RH.

ELECTRICAL
INSULATION RESISTANCE : 500 MΩ MINIMUM.
VOLTAGE PROOF (CONTACT TO CONTACT) : 1000 V AC.
DC CURRENT RATING : 1.5 Amps.
INPUT TO OUTPUT D.C. RESISTANCE : 200 mΩ MAXIMUM.
CONTACT RESISTANCE : 20 mΩ MAXIMUM.

Blue: PANTONE 3015C

ACCORDING TO ANSI/TIA-568.2-D
REQUIREMENTS
C6 CHANNEL COMPLIANT

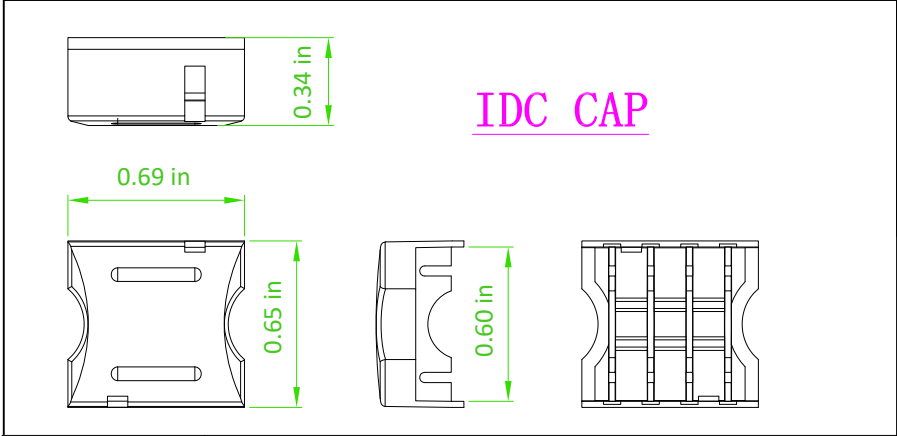

IDC CAP



DESCRIPTION
Monoprice Cat6 Punch Down Keystone Jack for 22-24AWG
Solid Wire, Blue

PID 5379		
DATE	04.09.2025	UNIT inches
FILE NAME		

③				
②				
①	Clamp	16.4*17.4*8.65	1	
NO.	PART NAME	SPECIFICATION DESCRIPTION	QTY	UNIT